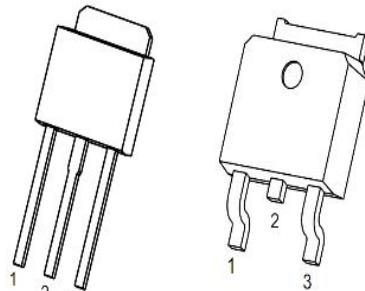
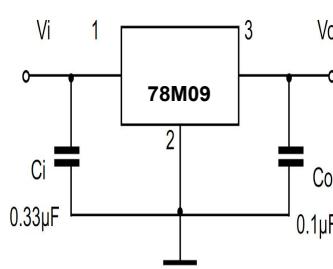


<p>Three-terminal positive voltage regulator</p> <p><u>TO-252/TO-251</u></p>  <p>1.IN 2.GND 3.OUT</p> <p>Marking : 78M09 D / U ****</p>	<p>TO-252/TO-251 Plastic-Encapsulate Voltage Regulators</p> <p>Features</p> <ul style="list-style-type: none"> ※ Maximum output current I_{OM}: 0.5A ※ Output voltage V_O: 9V ※ Continuous total dissipation PD: 1.25 W <p>TYPICAL APPLICATION:</p> 
--	--


Absolute Maximum ratings (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Unit
Input Voltage	V _i	35	V
Thermal Resistance From Junction to air	R _{θJA}	100	°C/W
Operating Junction Temperature Range	T _{OPR}	-25~+125	°C
Storage Temperature Range	T _{STG}	-55~+150	°C

Electrical Characteristics At Specified Virtual Junction Temperature
(V_i=16V, I_o=350mA, C_i=0.33μF, C_o=0.1μF. Unless Otherwise Specified)


Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Output voltage	V _O	25°C	8.65	9	9.35	V
		11.5V≤V _i ≤24V, I _o =5mA-350mA	-25~+125	8.55	9	9.45
Load Regulation	ΔV _O	I _o =5mA-0.5A, V _i =16V	25°C		20	mV
		I _o =5mA-200mA, V _i =16V	25°C		10	mV
Line Regulation	ΔV _O	11.5V≤V _i ≤26V, I _o =200mA	25°C		6	mV
		12V≤V _i ≤26V, I _o =200mA	25°C		2	mV
Quiescent Current	I _q		25°C		4.6	mA
Quiescent Current Change	ΔI _q	11.5V≤V _i ≤26V, I _o =200mA	-25~+125		0.8	mA
	ΔI _q	5mA≤I _o ≤350mA	-25~+125		0.5	mA
Output Noise Voltage	V _N	10Hz≤f≤100KHz	25°C		60	μV/V _O
Ripple Rejection	R _r	13V≤V _i ≤23V, f=120Hz, I _o =300mA	-25~+125	56	80	dB
Dropout Voltage	V _d	I _o =350mA	25°C		2	V
Short Circuit Current	I _{sc}	V _i =16V	25°C		250	mA
Peak Current	I _{PK}		25°C		0.5	A

Package Dimensions:

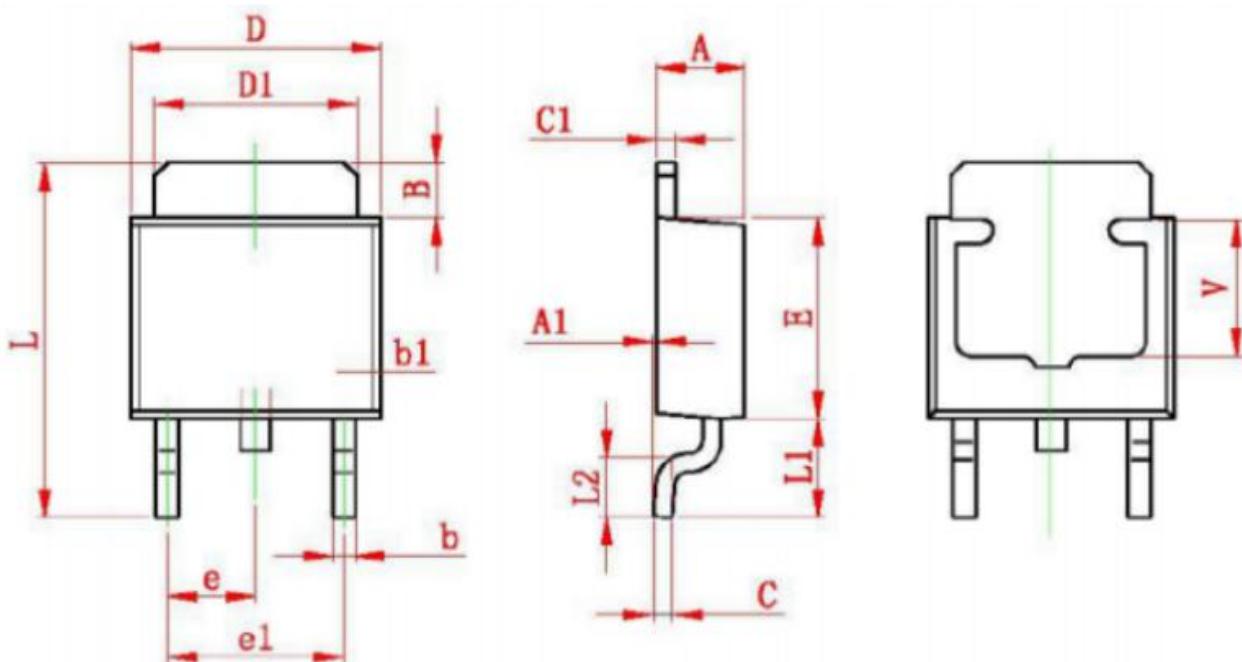

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	2.200	2.400	0.087	0.094
A1	0.000	0.127	0.000	0.005
B	1.350	1.650	0.053	0.065
b	0.500	0.700	0.020	0.028
b1	0.700	0.900	0.028	0.035
c	0.430	0.580	0.017	0.023
c1	0.430	0.580	0.017	0.023
D	6.350	6.650	0.250	0.262
D1	5.200	5.400	0.205	0.213
E	5.400	5.700	0.213	0.224
e	2.300 TYP		0.091 TYP	
e1	4.500	4.700	0.177	0.185
L	9.500	9.900	0.374	0.390
L1	2.550	2.900	0.100	0.114
L2	1.400	1.780	0.055	0.070
V	3.80 REF		0.150 REF	

Package Dimensions:

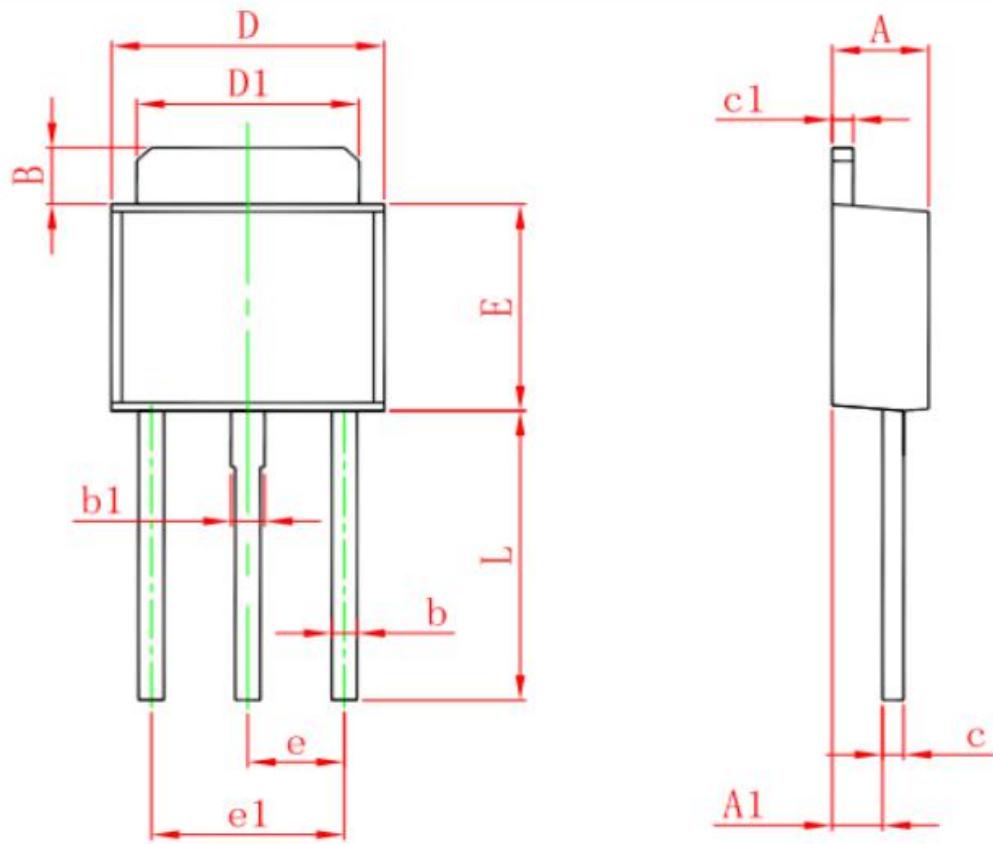

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	2.200	2.400	0.087	0.094
A1	1.050	1.350	0.042	0.054
B	1.350	1.650	0.053	0.065
b	0.500	0.700	0.020	0.028
b1	0.700	0.900	0.028	0.035
c	0.430	0.580	0.017	0.023
c1	0.430	0.580	0.017	0.023
D	6.350	6.650	0.250	0.262
D1	5.200	5.400	0.205	0.213
E	5.400	5.700	0.213	0.224
e	2.300 TYP.		0.091 TYP.	
e1	4.500	4.700	0.177	0.185
L	7.500	7.900	0.295	0.311