




REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER
A			新版本	2011-05-24	陈雄军

■ SPECIFICATIONS

- Voltage rating: 125V AC, DC
- Current rating: 1A, AC, DC
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 100M Ω min
- Temperature range: -25 $^{\circ}$ C \sim +85 $^{\circ}$ C
- Contact resistance: 20m Ω max

■ HOUSING

- Part No. : HI250-NP
- Poles: 02-16
- Material: Nylon 66 UL 94V-0

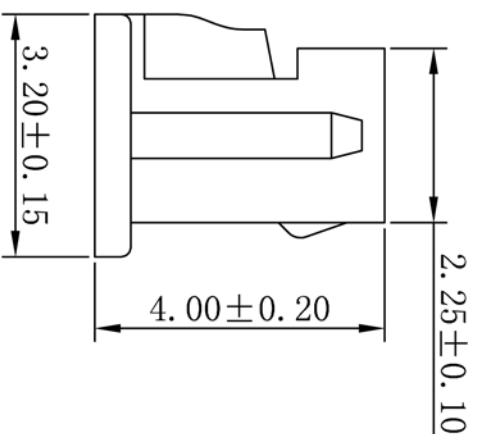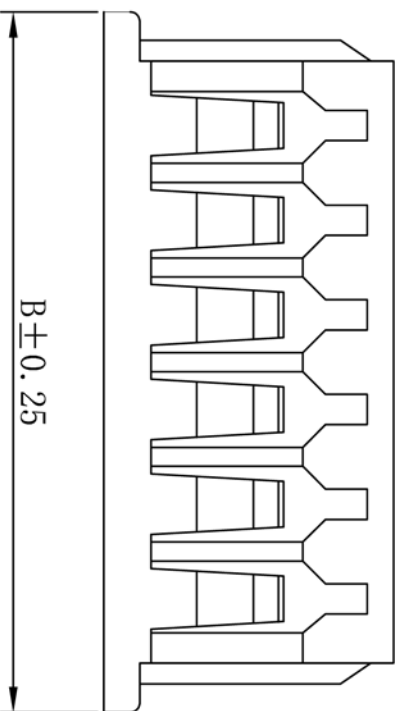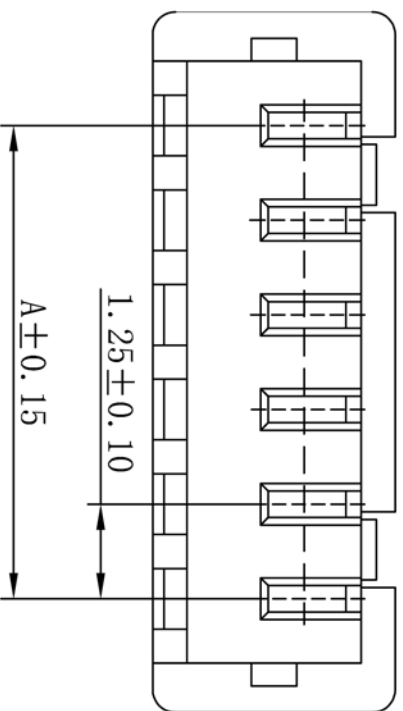

PART NO	Dimensions (mm)	
	A	B
HI250-02	1.25	4.25
HI250-03	2.50	5.50
HI250-04	3.75	6.75
HI250-05	5.00	8.00
HI250-06	6.25	9.25
HI250-07	7.50	10.50
HI250-08	8.75	11.75
HI250-09	10.00	13.00
HI250-10	11.25	14.25
HI250-11	12.50	15.50
HI250-12	13.75	16.75
HI250-13	15.00	18.00
HI250-14	16.25	19.25
HI250-15	17.50	20.50
HI250-16	18.75	21.75

乐清博穆电子有限公司

TITLE		成品规格图		TOLERANCE	
CHECKED BY	DATE	SCALE	VER NO.	SIZE	
	2011-05-24	1:1	A	A4	
DRAWN BY	UNIT: mm	☉		☐	
陈雄军		PART NO.		HI250-NP	