
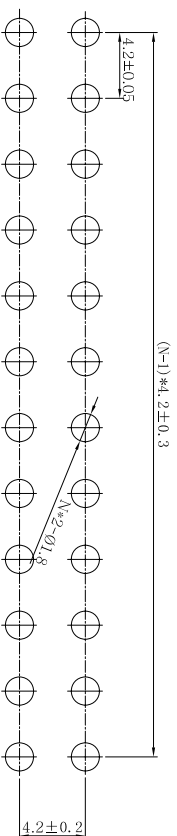
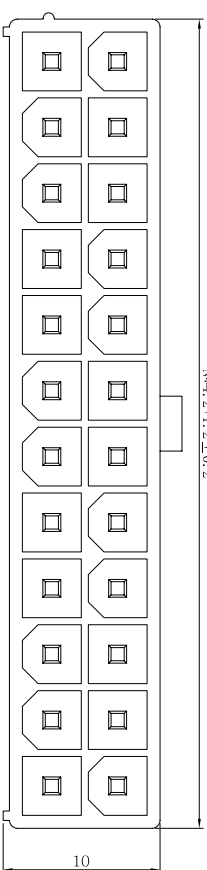
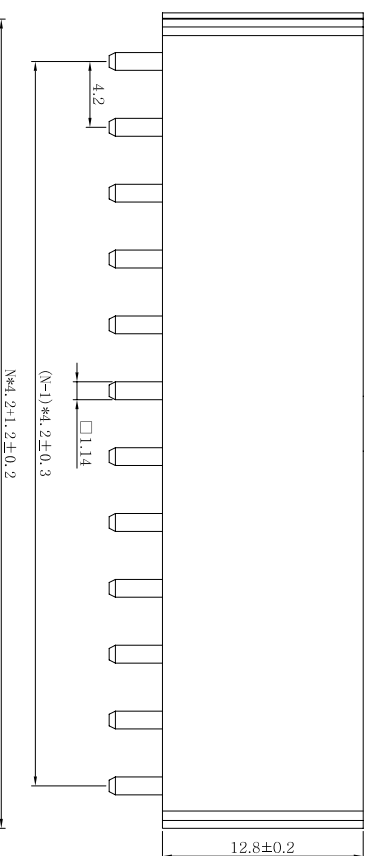


PIN	A	B
1	5.40	0.00
2	9.60	4.20
3	13.80	8.40
4	18.00	12.60
5	22.20	16.80
6	26.40	21.00
7	30.60	25.20
8	34.80	29.40
9	39.00	33.60
10	43.20	37.80
11	47.40	42.00
12	51.60	46.20

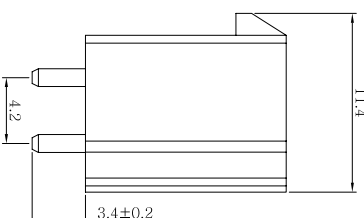

P. C. B Layout

一. 电气性能:

- 1-1. 额定电流: 9A AC DC.
- 1-2. 接触电阻: $\leq 0.015m\Omega$
- 1-3. 绝缘电阻: $\geq 1000M\Omega$
- 1-4. 耐压: 1500V AC/Minute

二. 物理特性:

- 2-1. 操作温度: $-40^{\circ}C \sim 105^{\circ}C$
- 2-2. 焊接温度: $+240^{\circ}C$, 8s max

三. 材质:

- 3-1. 塑胶: PA66 (Nylon) UL94V-0
- 3-2. 插针: Phosphor bronze/tin plating

图名: ATX4.2-2xNA
图号: XXXXXXXXXXXXXXXXXXXXXXX

未标注公差

XX.	± 0.40	XX°	$\pm 2^{\circ}$
X.	± 0.30	XX°	$\pm 1^{\circ}$
.X	± 0.20		
.XX	± 0.15		

绘制: 韩金锋 单位: MM
签发: 比例: 1:1
审核: 视图:

