
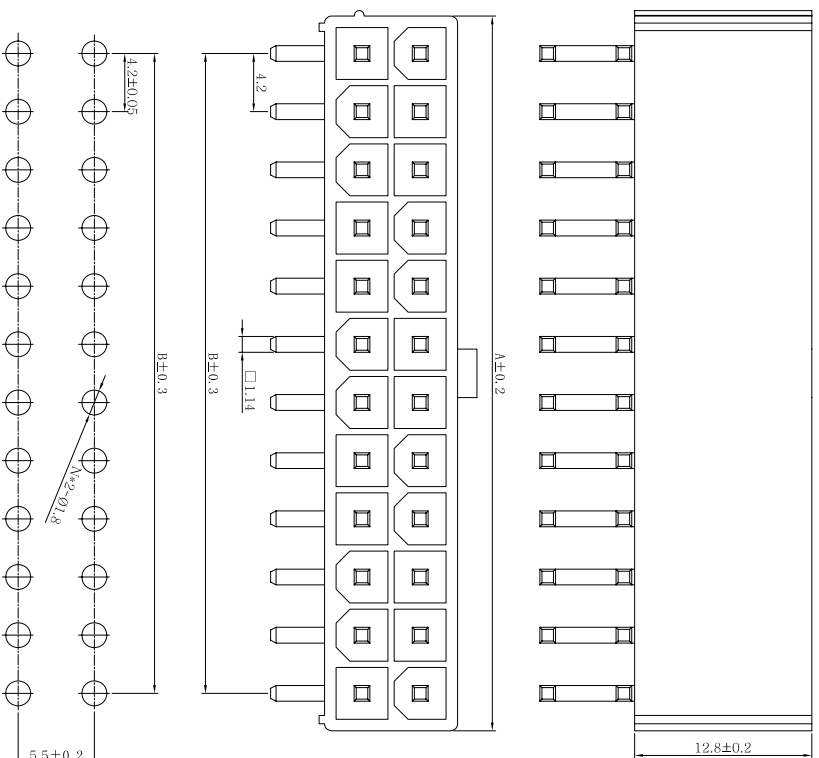


PIN	A	B
1	5.40	0.00
2	9.60	4.20
3	13.80	8.40
4	18.00	12.60
5	22.20	16.80
6	26.40	21.00
7	30.60	25.20
8	34.80	29.40
9	39.00	33.60
10	43.20	37.80
11	47.40	42.00
12	51.60	46.20

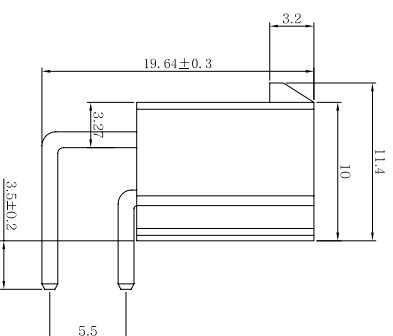

P.C.B Layout

- 一. 电气性能:
- 1-1. 额定电流: 9A AC DC.
 - 1-2. 接触电阻: $\leq 0.015m\Omega$
 - 1-3. 绝缘电阻: $\geq 1000M\Omega$
 - 1-4. 耐压: 1500V AC/Minute
- 二. 物理特性:
- 2-1. 操作温度: $-40^{\circ}C \sim 105^{\circ}C$
 - 2-2. 焊接温度: $+240^{\circ}C$, 8s max
- 三. 材质:
- 3-1. 塑胶: PA66 (Nylon) UL94V-0
 - 3-2. 插针: Phosphor bronze/tin plating

图名:	ATX4.2-2xNAW			图号:	XXXXXXXXXXXXXXXXXXXXXX		
未标注公差				XX.	± 0.40	XX°	$\pm 2^{\circ}$
				X.	± 0.30	.XX°	$\pm 1^{\circ}$
				.X	± 0.20		
				.XX	± 0.15		
绘制:	韩金锋	单位:	MM	审核:		视图:	
签发:		比例:	1:1				