



DC Input 4-Pin Mini-Flat High Power Photo Darlington Optocoupler

Features

- High isolation 3750 VRMS
- CTR flexibility available see order information
- DC input with transistor output
- Green material
- RoHS compliant
- REACH compliance
- Operating temperature range - 55 °C to 125 °C
- Regulatory Approvals
 - UL - UL1577 (Pending Approval)
 - VDE - EN60747-5-5 (Pending Approval)
 - CQC – GB4943.1, GB8898 (Pending Approval)
 - IEC60065, IEC60950 (Pending Approval)


Description

The CT127 consists of a high power photo Darlington transistor optically coupled to a gallium arsenide Infrared-emitting diode in a 4-lead Mini-Flat package.


Applications

- Switch mode power supplies
- Computer peripheral interface
- Microprocessor system interface

Package Outline

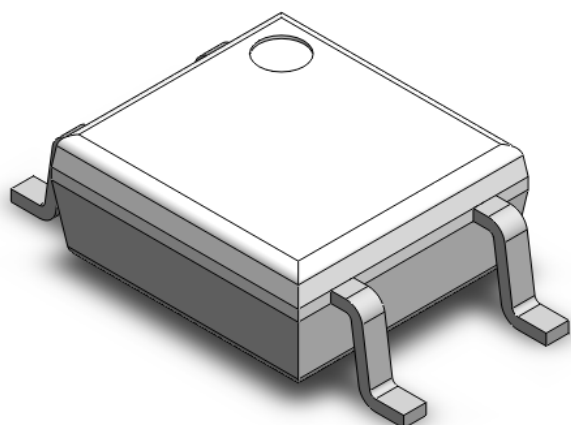

Schematic

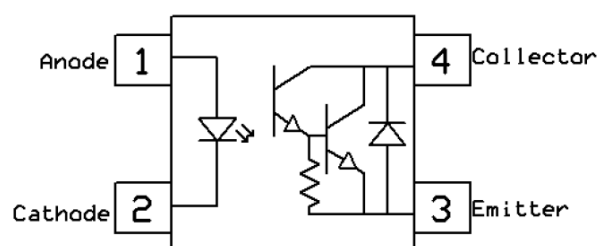

CT127

Note: Different lead forming options available. See package dimension.



CT127 Series

DC Input 4-Pin Mini-Flat

High Power Photo Darlington Optocoupler

Absolute Maximum Rating at 25°C

Symbol	Parameters	Ratings	Units	Notes
V _{ISO}	Isolation voltage	3750	V _{RMS}	
P _{TOT}	Total power dissipation	260	mW	
T _{OPR}	Operating temperature	-55 ~ +125	°C	
T _{STG}	Storage temperature	-55 ~ +150	°C	
T _{SOL}	Soldering temperature	260	°C	
Emitter				
I _F	Forward current	80	mA	
I _{F(TRANS)}	Peak transient current (≤1μs P.W,300pps)	1	A	
V _R	Reverse voltage	6	V	
P _D	Emitter power dissipation	150	mW	
Detector				
P _D	Detector power dissipation	300	mW	
B _{VCEO}	Collector-Emitter Breakdown Voltage	350	V	
B _{VECO}	Emitter-Collector Breakdown Voltage	0.1	V	
I _C	Collector Current	150	mA	



CT127 Series

DC Input 4-Pin Mini-Flat

High Power Photo Darlington Optocoupler

Electrical Characteristics $T_A = 25^\circ\text{C}$ (unless otherwise specified)

Emitter Characteristics

Symbol	Parameters	Test Conditions	Min	Typ	Max	Units	Notes
V_F	Forward voltage	$I_F = 10\text{mA}$	-	1.2	1.3	V	
I_R	Reverse Current	$V_R = 6\text{V}$	-	-	5	μA	
C_{IN}	Input Capacitance	$f = 1\text{MHz}$	-	30	-	pF	

Detector Characteristics

Symbol	Parameters	Test Conditions	Min	Typ	Max	Units	Notes
$B_{V_{CEO}}$	Collector-Emitter Breakdown	$I_C = 0.1\text{mA}$	350	-	-	V	
$B_{V_{ECO}}$	Emitter-Collector Breakdown	$I_E = 0.1\text{mA}$	0.3	-	-	V	
I_{CEO}	Collector-Emitter Dark Current	$V_{CE} = 200\text{V}, I_F = 0\text{mA}$	-	-	200	nA	
		$V_{CE} = 200\text{V}, I_F = 0\text{mA}, T_A = 85^\circ\text{C}$			20	μA	

Transfer Characteristics

Symbol	Parameters	Test Conditions	Min	Typ	Max	Units	Notes
CTR	Current Transfer Ratio	$I_F = 1\text{mA}, V_{CE} = 1\text{V}$	1000	4000		%	
$V_{CE(SAT)}$	Collector-Emitter Saturation Voltage	$I_F = 10\text{mA}, I_C = 100\text{mA}$		-	1.2	V	
		$I_F = 1\text{mA}, I_C = 10\text{mA}$			1		
R_{IO}	Isolation Resistance	$V_{IO} = 500\text{V}_{DC}$	5×10^{10}	-	-	Ω	
C_{IO}	Isolation Capacitance	$f = 1\text{MHz}$	-	0.5	1	pF	

Switching Characteristics

Symbol	Parameters	Test Conditions	Min	Typ	Max	Units	Notes
t_r	Rise Time	$I_C = 10\text{mA}, V_{CE} = 2\text{V},$ $R_L = 100\Omega$	-	-	300	μs	
t_f	Fall Time		-	-	250		



CT127 Series DC Input 4-Pin Mini-Flat High Power Photo Darlington Optocoupler

Typical Characteristic Curves

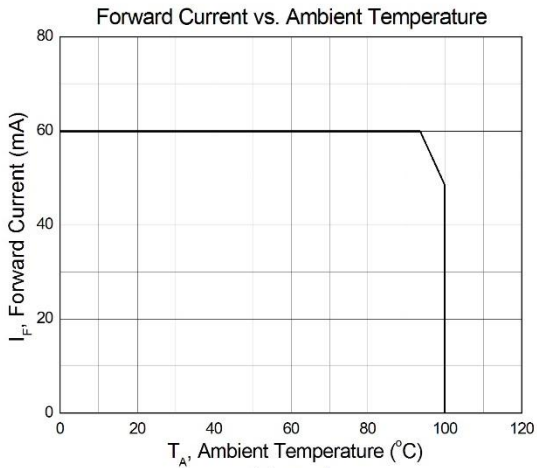


Figure 1

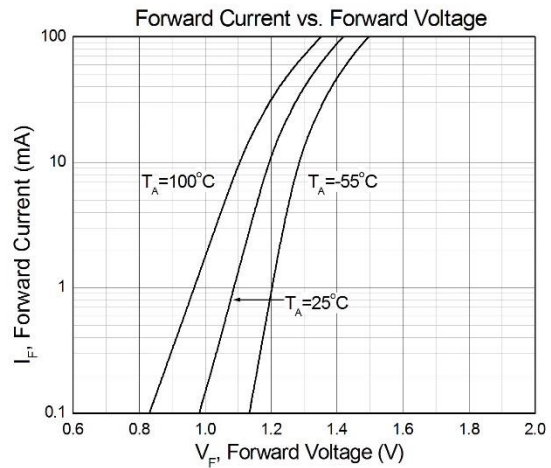


Figure 2

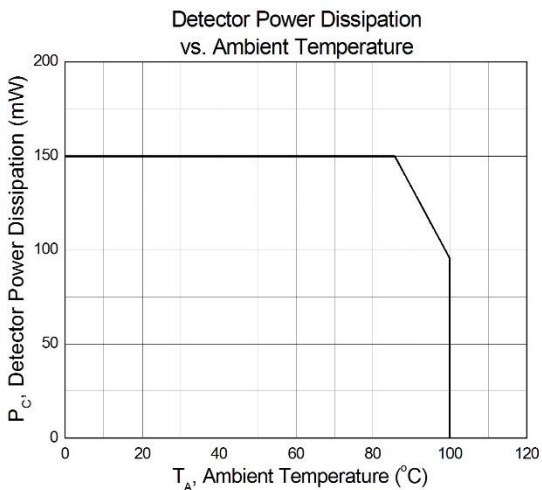


Figure 3

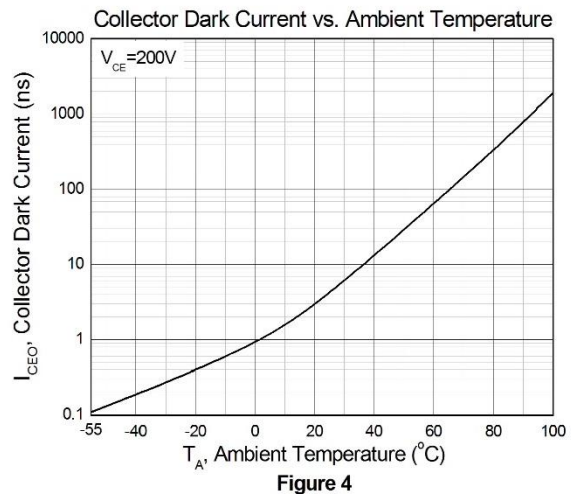


Figure 4

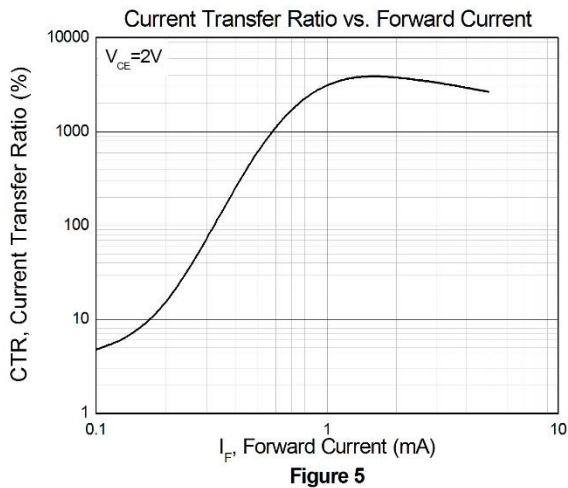


Figure 5

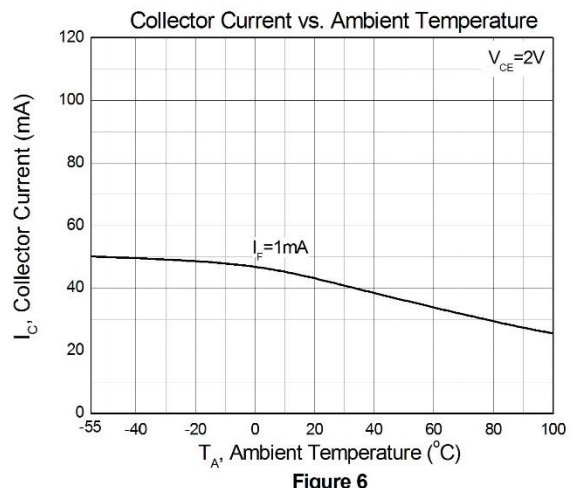








Figure 6



CT127 Series

DC Input 4-Pin Mini-Flat


High Power Photo Darlington Optocoupler

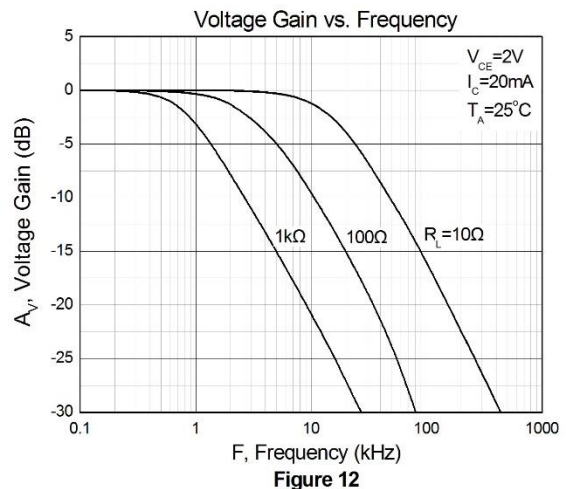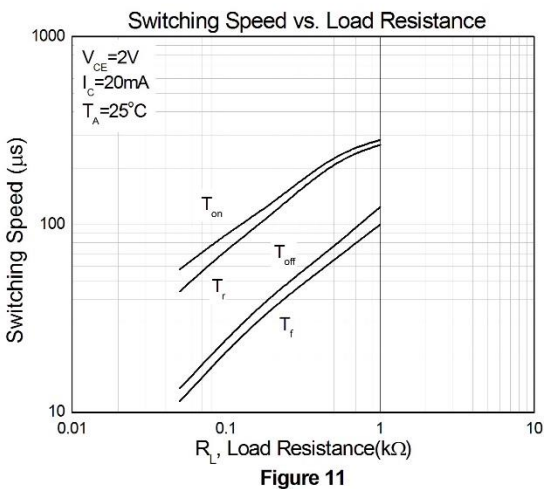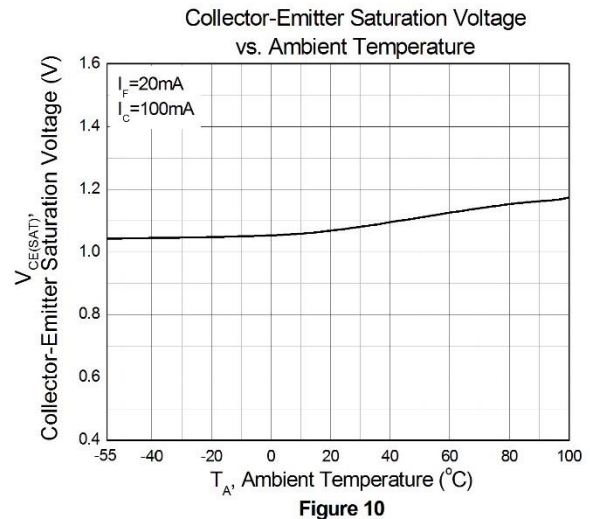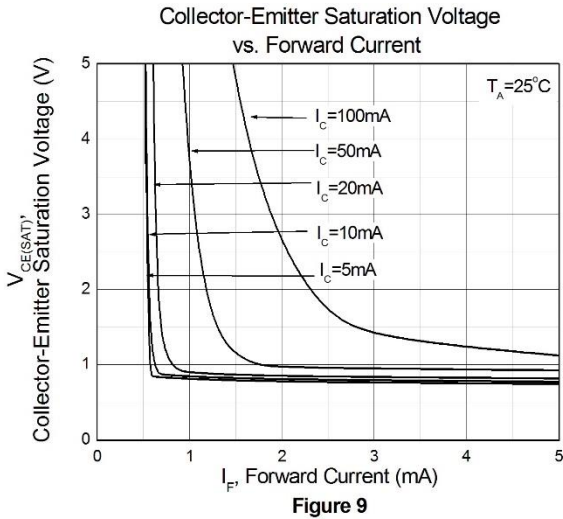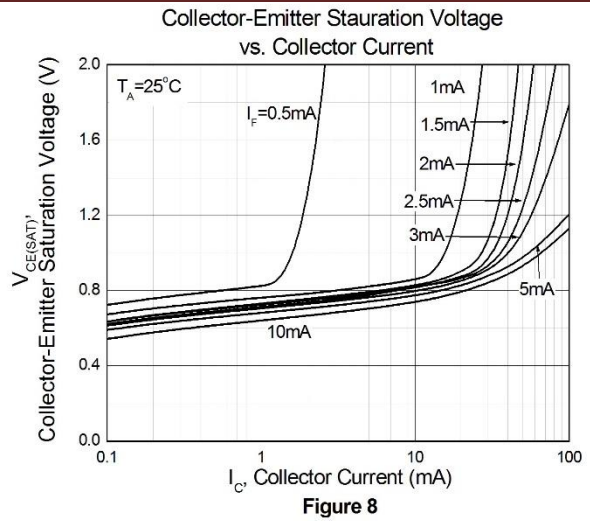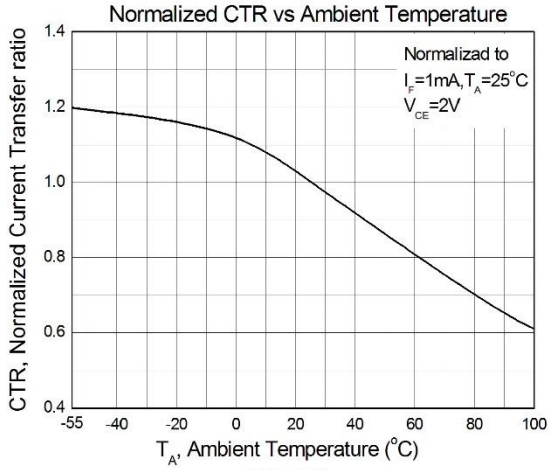




CT127 Series DC Input 4-Pin Mini-Flat High Power Photo Darlington Optocoupler

Package Dimension *Dimensions in mm unless otherwise stated*

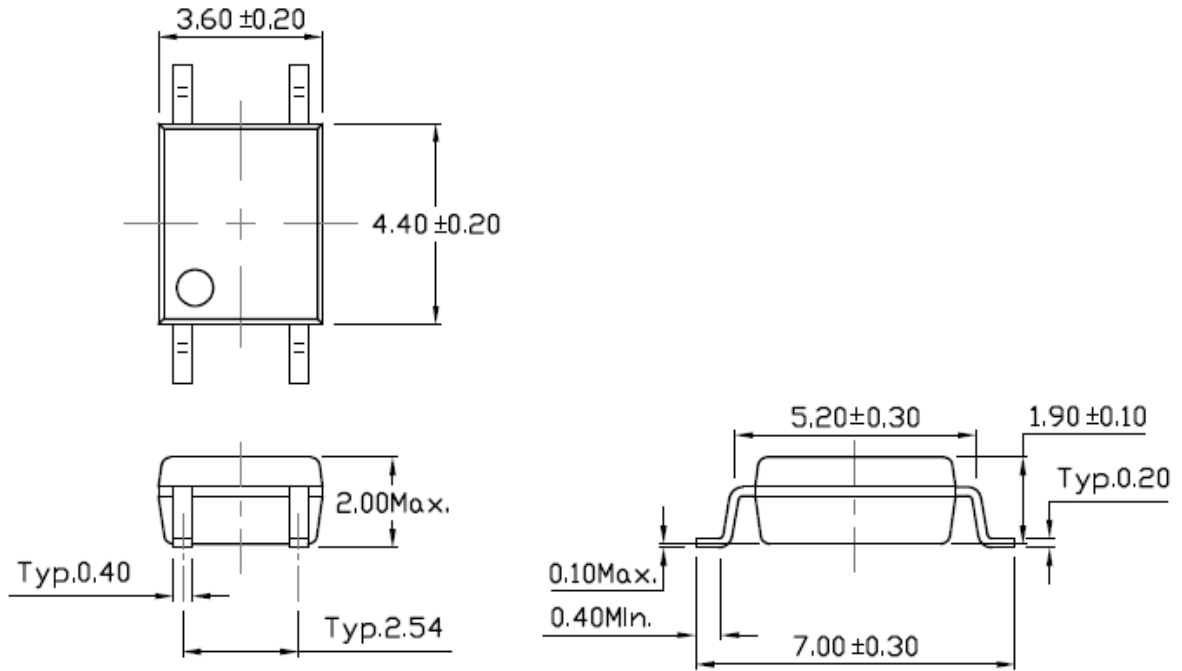

Recommended Solder Mask *Dimensions in mm unless otherwise stated*

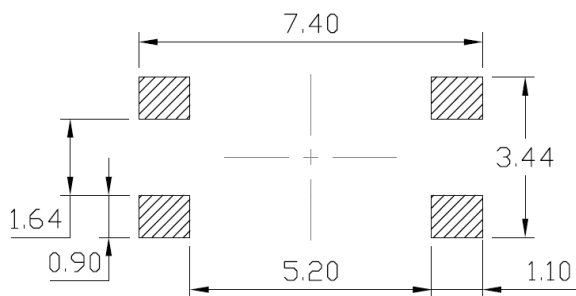




CT127 Series

DC Input 4-Pin Mini-Flat

High Power Photo Darlington Optocoupler

Marking Information

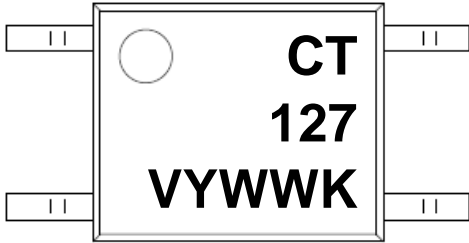

Note:

- CT : Denotes "CT Micro"
- 127 : Part Number
- V : VDE Safety Option
- Y : Fiscal Year
- WW : Work Week
- K : Manufacturing Code

Ordering Information

CT127(V)(Y)

- CT : Denotes "CT Micro"
- 127 : Part Number
- V : VDE Safety Option (V or none)
- Y : Tape and reel option (T1 or T2)


Option	Description	Quantity
T1	Surface Mount Lead Forming – With Option 1 Tapping	3000 Units/Reel
T2	Surface Mount Lead Forming – With Option 2 Tapping	3000 Units/Reel




CT127 Series DC Input 4-Pin Mini-Flat High Power Photo Darlington Optocoupler

Carrier Tape Specifications *Dimensions in mm unless otherwise stated*

Option T1

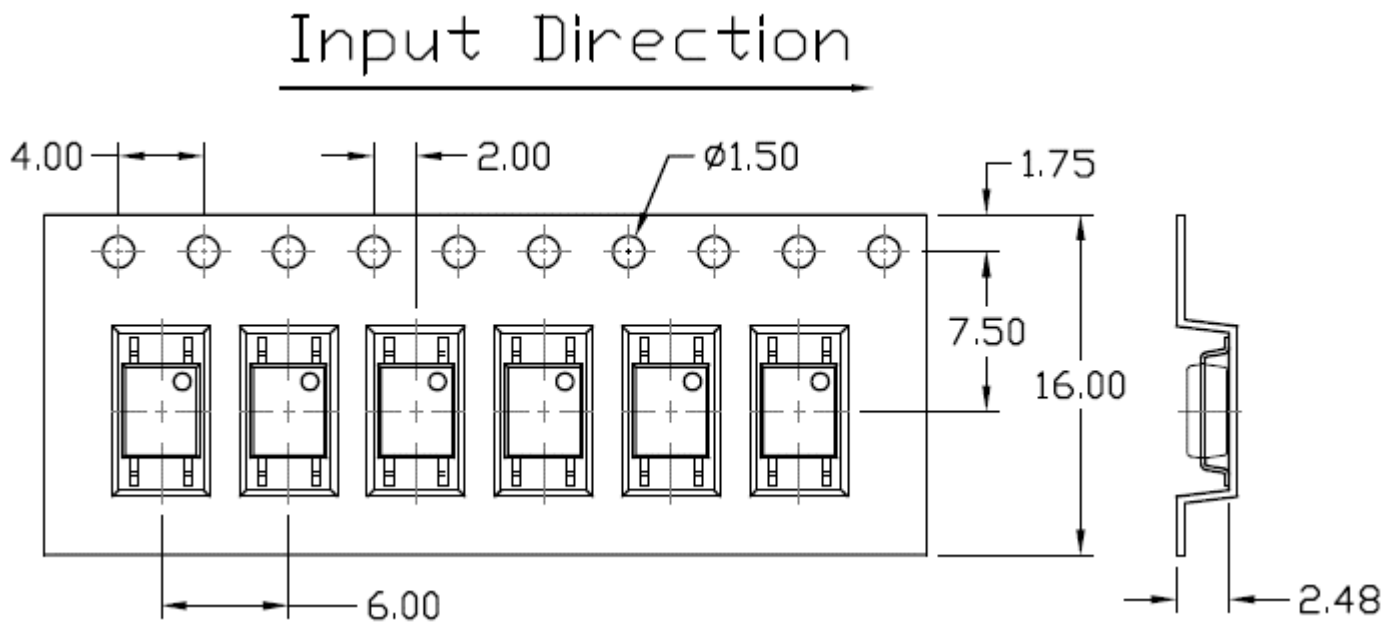

Option T2

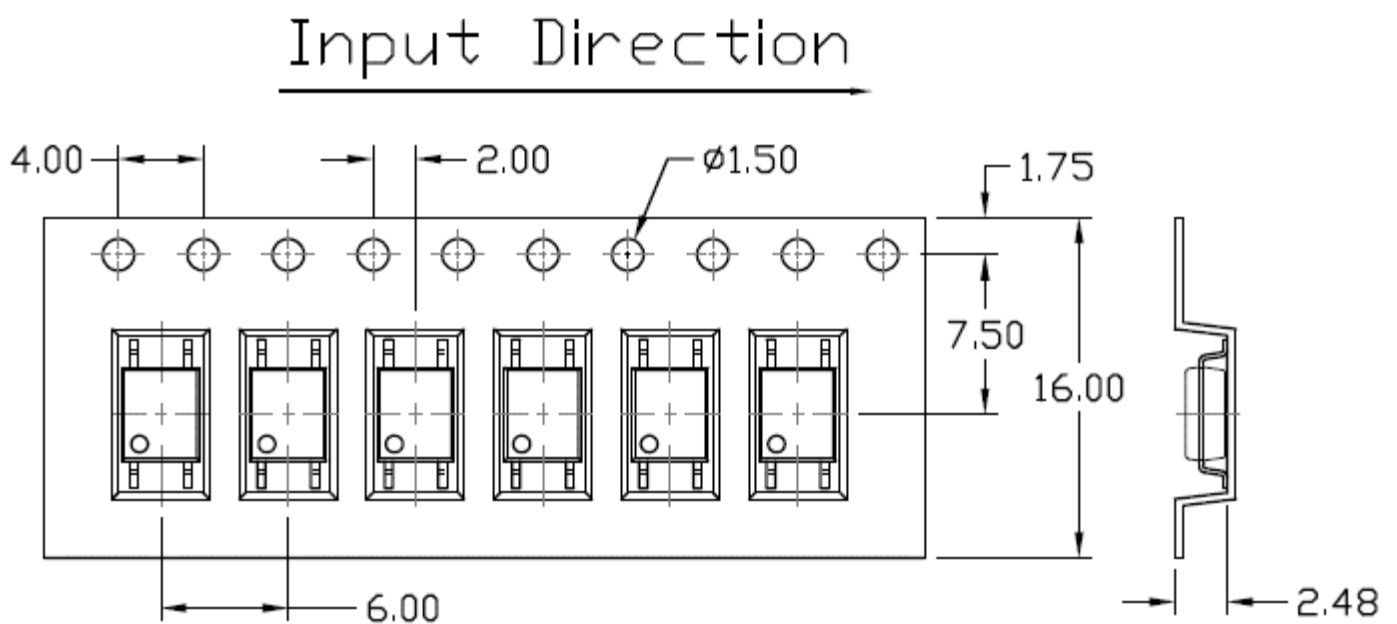




CT127 Series

DC Input 4-Pin Mini-Flat

High Power Photo Darlington Optocoupler

Reflow Profile

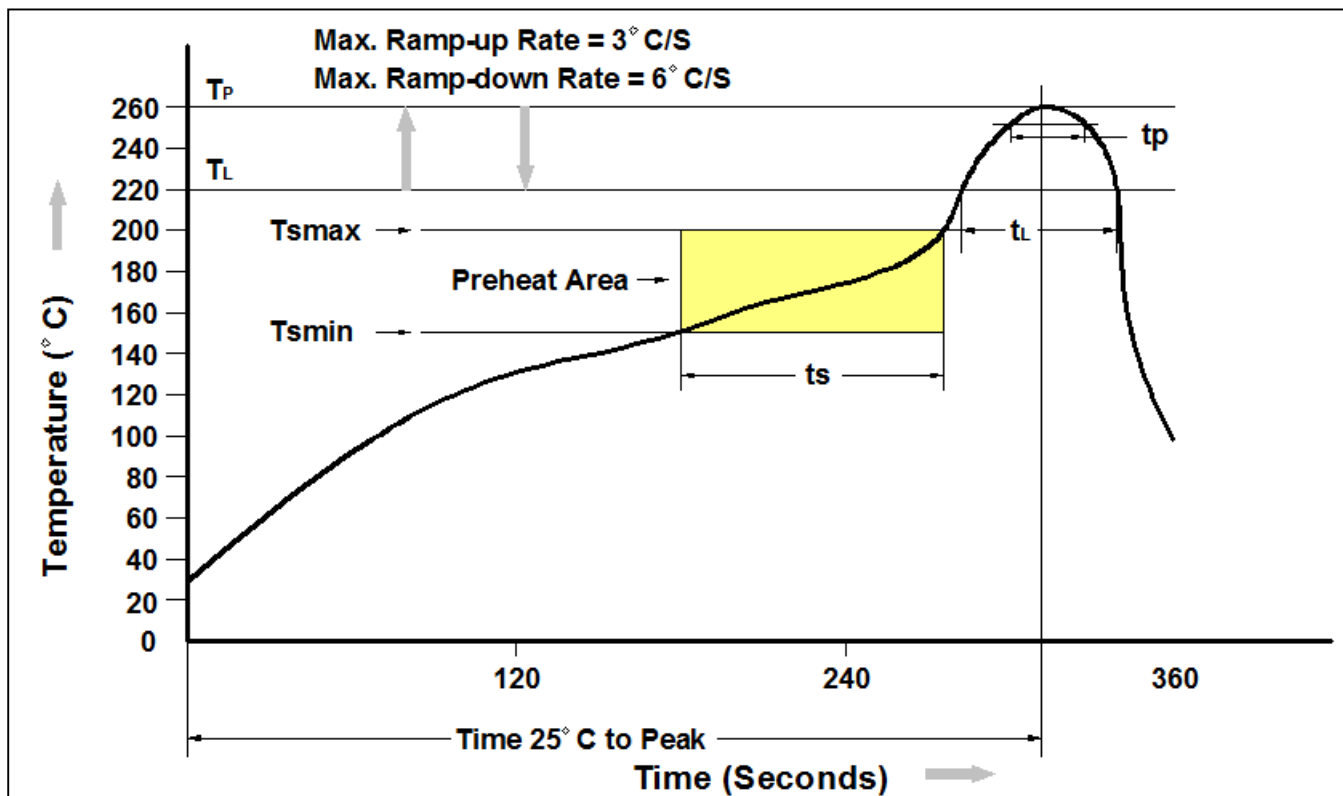

Profile Feature	Pb-Free Assembly Profile
Temperature Min. (T _{smin})	150°C
Temperature Max. (T _{smax})	200°C
Time (t _s) from (T _{smin} to T _{smax})	60-120 seconds
Ramp-up Rate (t _L to t _P)	3°C/second max.
Liquidous Temperature (T _L)	217°C
Time (t _L) Maintained Above (T _L)	60 – 150 seconds
Peak Body Package Temperature	260°C +0°C / -5°C
Time (t _P) within 5°C of 260°C	30 seconds
Ramp-down Rate (T _P to T _L)	6°C/second max
Time 25°C to Peak Temperature	8 minutes max.



CT127 Series

DC Input 4-Pin Mini-Flat

High Power Photo Darlington Optocoupler

DISCLAIMER

CT MICRO RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. CT MICRO DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

DISCOLORATION MIGHT OCCUR ON THE PACKAGE SURFACE AFTER SOLDERING, REFLOW OR LONG TERM USE. THIS DOES NOT IMPACT THE PRODUCT PERFORMANCE NOR THE PRODUCT RELIABILITY.

CT MICRO ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT EXPRESS WRITTEN APPROVAL OF CT MICRO INTERNATIONAL CORPORATION.

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instruction for use provided in the labelling, can be reasonably expected to result in significant injury to the user.*
- 2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.*