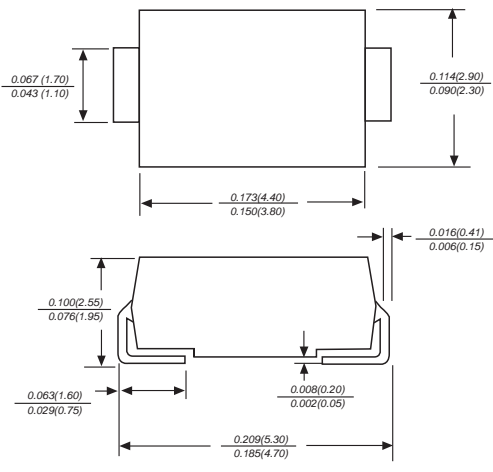


SURFACE MOUNT SUPER FAST RECTIFIER	Reverse Voltage - 50 to 600 Volts Forward Current -2.0 Ampere
<p>DO-214AC/SMA</p>  <p style="text-align: center;"><i>Dimensions in inches and (millimeters)</i></p>	<p>Features</p> <ul style="list-style-type: none"> ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0 ◆ Idea for printed circuit board ◆ Glass passivated Junction chip ◆ Low reverse leakage ◆ High forward surge current capability ◆ High temperature soldering guaranteed 250°C/10 seconds at terminals <p>Mechanical Data</p> <p>Case : Molded plastic body</p> <p>Terminals : Solder plated, solderable per MIL-STD-750, Method 2026</p> <p>Polarity : Polarity symbol marking on body</p> <p>Mounting Position : Any</p> <p>Weight : 0.0023 ounce, 0.07 grams</p>

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Parameter	SYMBOLS	ES2A	ES2B	ES2C	ES2D	ES2F	ES2G	ES2J	UNITS
Maximum repetitive peak reverse voltage	V _{RRM}	50	100	150	200	300	400	600	V
Maximum RMS voltage	V _{RMS}	35	70	105	140	210	280	420	V
Maximum DC blocking voltage	V _{DC}	50	100	150	200	300	400	600	V
Maximum average forward rectified current at T _L =100°C	I _(AV)	2.0							A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	I _{FSM}	50.0							A
Maximum instantaneous forward voltage at 2.0A	V _F	0.95				1.25		1.7	V
Maximum DC reverse current T _A =25°C at rated DC blocking voltage T _A =125°C	I _R					5.0 500			uA
Maximum reverse recovery time(Note 1)	T _{rr}					35			ns
Typical junction capacitance (Note2)	C _J					55.0			pF
Typical thermal resistance	R _{qJA}					80.0			°C/W
Operating junction and storage temperature range	T _J , T _{STG}	-55 to +150							°C

Note: 1.Reverse recovery time test condition: I_F=0.5A I_R=1.0A I_{rr}=0.25A

2.Measured at 1MHz and applied reverse voltage of 4.0V D.C.

Ratings And Characteristic Curves

FIG. 1- DERATING CURVE OUTPUT RECTIFIED CURRENT

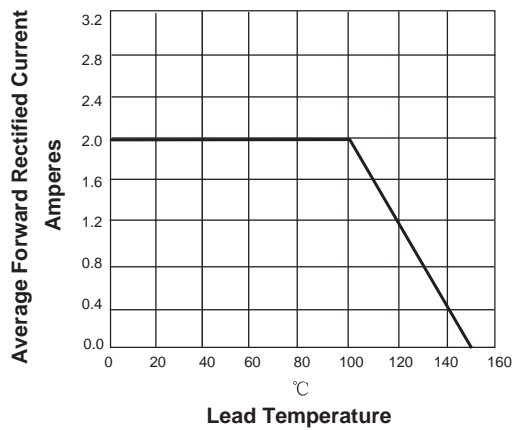


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PERLEG

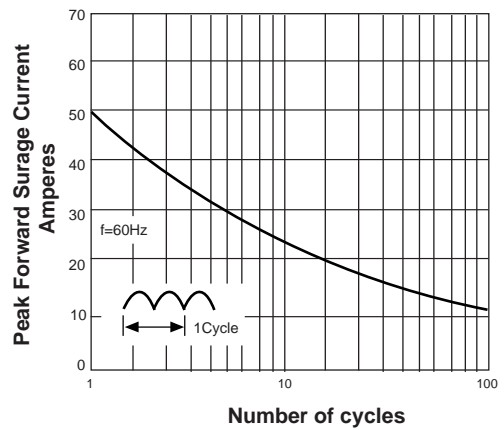


FIG. 3-TYPICAL FORWARD VOLTAGE CHARACTERISTICS

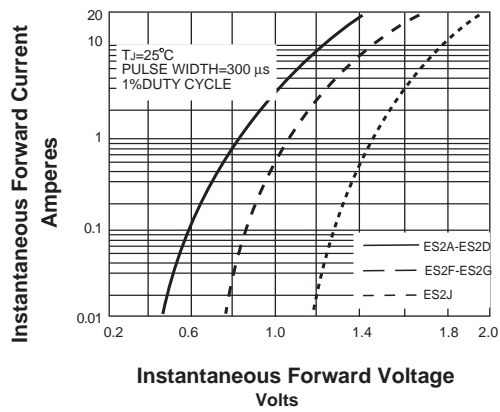


FIG. 4-TYPICAL REVERSE LEAKAGE CHARACTERISTICS

