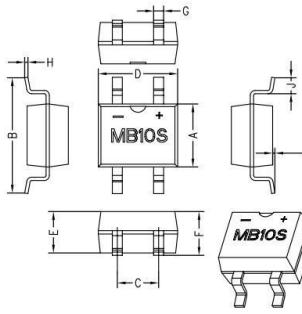


反向電壓: 50--1000 伏 REVERSE VOLTAGE: 50 to 1000 VOLTS		正向電流: 1 安培 FORWARD CURRENT: 1AMPERE							
<u>MBS</u>		<u>Features</u>							
 MBS		<ul style="list-style-type: none"> 玻璃鈍化晶片 Glass Passivated Die Construction 正向浪湧承受能力強 High Forward surge capability 低正向壓降 Low Forward Voltage Drop 高溫焊接保證 High temperature soldering guaranteed: 260°C/10 秒 引線和管體皆符合 RoHS 標準 Lead and body according with RoHS standard 							
單位: mm		<u>Mechanical Data</u>							
極限值和溫度特性 (TA=25°C除非另有規定) Ratings at 25°C ambient temperature unless otherwise specified									
參數 Parameters	符號 Symbol	MB05S	MB1S	MB2S	MB4S	MB6S	MB8S	MB10S	Units
最大可重複峰值反向電壓 Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	Volts
最大均方根電壓 Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	Volts
最大直流阻斷電壓 Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	Volts
最大正向平均整流電流 Maximum Average Forward Rectified Current@Ta=40° C	I (AV)	1						Amp	
正向不重複浪湧電流 8.3ms 單一正弦半波 Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load	I _{FSM}	35						Amp	
單位時間內承受的最大電流 I ² t Rating for Fusing(t<8.3ms)	I ² t	5.0						A ² s	
最大正向電壓 Maximum Forward Voltage at 0.5A DC and 25°C	V _F	1.0						Volts	
最大反向電流@VDC Maximum Reverse Current at T _A =25°C	IR	5.0						uAmp	
最大反向電流@VDC Maximum Reverse Current at T _A =125°C		500							
典型結電容 VR=4.0V, f=1MHZ Typical Junction Capacitance	C _J	13						pF	
典型熱阻 Typical Thermal Resistance	R _{θ JA}	60						°C/W	
工作結溫和存儲溫度 Operating and Storage Temperature Range	T _J , T _{stg}	-55 to +150						°C	

特性曲线 Characteristic Curves ($TA=25^{\circ}\text{C}$ unless otherwise noted)

Fig.1 Derating Curve For Output Rectified Current

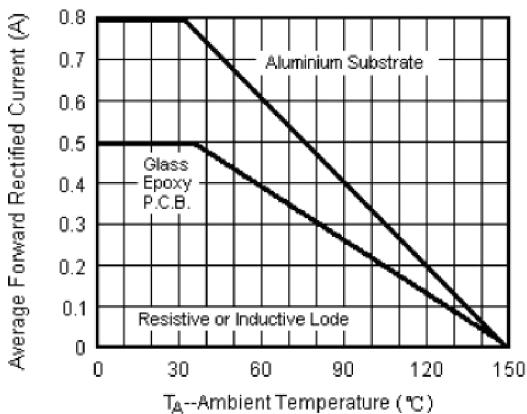


Fig.2 Maximum Non-Repetitive Peak Forward Surge Current Per Leg

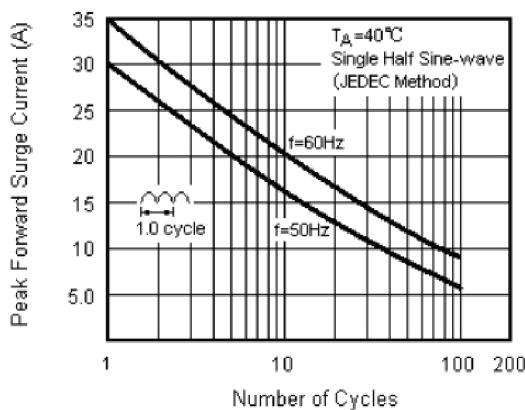


Fig.3 Typical Forward Voltage Characteristics Per Leg

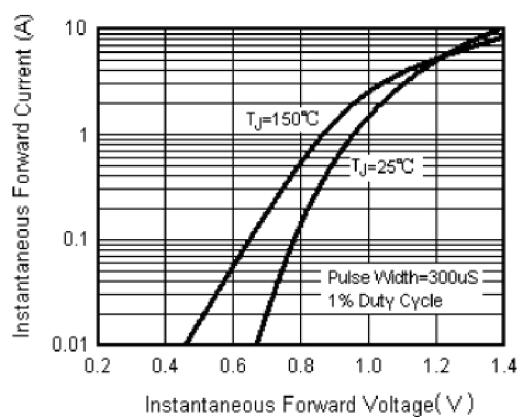


Fig.4 Typical Reverse Leakage Characteristics Per Leg

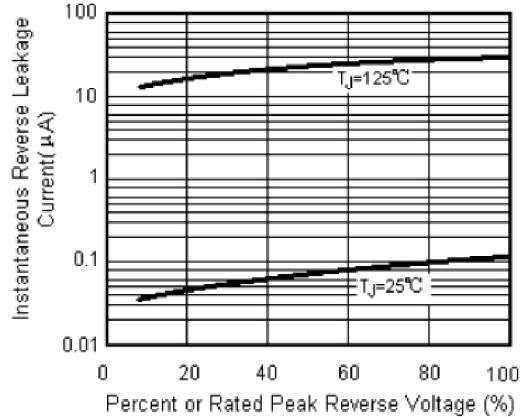


Fig.5 Typical Junction Capacitance Per Leg

