

<p>SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER</p>	<p>Reverse Voltage - 20 to 200 Volts Forward Current - 2.0 Amperes</p>
<p>SMAF</p> <p>Dimensions in inches and (millimeters)</p>	<p>Features</p> <ul style="list-style-type: none"> → The plastic package carries Underwriters Laboratory Flammability Classification 94V-0 → For surface mounted applications → Built-in strain relief, ideal for automated placement → Low reverse leakage → High forward surge current capability → High temperature soldering guaranteed 250°C/10 seconds at terminals <p>Mechanical Data</p> <p>Case : Molded plastic body</p> <p>Terminals : Solder plated, solderable per MIL-STD-750, Method 2026</p> <p>Polarity : Polarity symbol marking on body</p> <p>Mounting Position : Any</p> <p>Weight : 0.0014 ounce, 0.038 grams</p>

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Parameter	SYMBOLS	SS22F	SS24F	SS26F	SS28F	SS210F	SS215F	SS220F	UNITS
Maximum repetitive peak reverse voltage	V _{RRM}	20	40	60	80	100	150	200	V
Maximum RMS voltage	V _{RMS}	14	28	42	56	70	105	140	V
Maximum DC blocking voltage	V _{DC}	20	40	60	80	100	150	200	V
Maximum average forward rectified current at T _L =100°C	I _(AV)	2.0						A	
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	I _{FSM}	50.0						A	
Maximum instantaneous forward voltage at 2.0A	V _F	0.55		0.70		0.85		0.95	V
Maximum DC reverse current T _A =25°C at rated DC blocking voltage T _A =125°C	I _R	0.5 50		0.05 10					
Typical thermal resistance	R _{qJA}	70.0						°C/W	
Operating junction temperature range	T _J	-55 to +125			-55 to +150			°C	
Storage temperature range	T _{STG}	-55 to +150						°C	

Ratings And Characteristic Curves

FIG. 1- DERATING CURVE OUTPUT RECTIFIED CURRENT

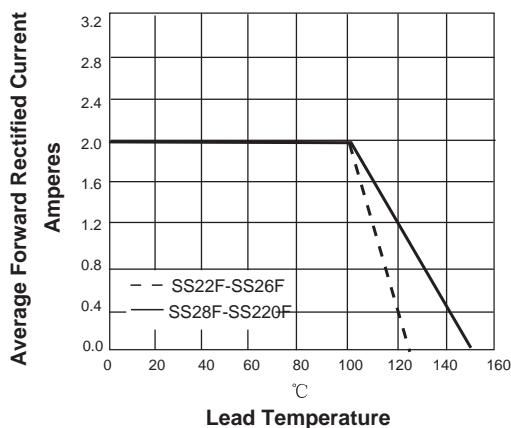


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PERLEG

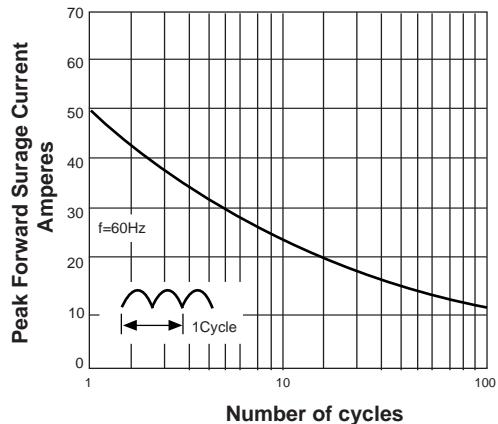


FIG. 3-TYPICAL FORWARD VOLTAGE CHARACTERISTICS

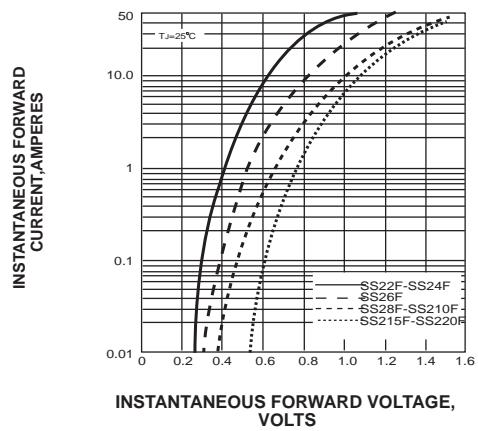


FIG. 4-TYPICAL REVERSE LEAKAGE CHARACTERISTICS

