


SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER	Reverse Voltage - 150 to 200 Volts Forward Current -3.0 Amperes																																																															
<p style="text-align: center;"><u>DO-214AC/SMA</u></p> <p style="text-align: center;">Dimensions in inches and (millimeters)</p>	<h3>Features</h3> <ul style="list-style-type: none"> ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0 ◆ For surface mounted applications ◆ Metal silicon junction, majority carrier conduction ◆ Low power loss, high efficiency ◆ Built-in strain relief, ideal for automated placement ◆ High forward surge current capability ◆ High temperature soldering guaranteed: 260°C/10 seconds at terminals <h3>Mechanical Data</h3> <p> Case: JEDEC DO-214AC molded plastic body Terminals: Solder plated, solderable per MIL-STD-750, Method 2026 Polarity: Color band denotes cathode end Mounting Position: Any Weight: 0.002 ounce, 0.07 grams </p>																																																															
MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS																																																																
Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.																																																																
	<table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th style="width:30%;">SYMBOLS</th> <th style="width:20%;">SS315</th> <th style="width:20%;">SS320</th> <th style="width:30%;">UNITS</th> </tr> </thead> <tbody> <tr> <td>Maximum repetitive peak reverse voltage</td> <td style="text-align: center;">V_{RRM}</td> <td style="text-align: center;">150</td> <td style="text-align: center;">200</td> <td style="text-align: center;">V</td> </tr> <tr> <td>Maximum RMS voltage</td> <td style="text-align: center;">V_{RMS}</td> <td style="text-align: center;">105</td> <td style="text-align: center;">140</td> <td style="text-align: center;">V</td> </tr> <tr> <td>Maximum DC blocking voltage</td> <td style="text-align: center;">V_{DC}</td> <td style="text-align: center;">150</td> <td style="text-align: center;">200</td> <td style="text-align: center;">V</td> </tr> <tr> <td>Maximum average forward rectified current 0.375" (9.5mm) lead length (see fig. 1)</td> <td style="text-align: center;">$I_{(AV)}$</td> <td colspan="2" style="text-align: center;">3.0</td> <td style="text-align: center;">A</td> </tr> <tr> <td>Peak forward surge current 8.3ms single half sine-wave superimposed on rated load</td> <td style="text-align: center;">I_{FSM}</td> <td colspan="2" style="text-align: center;">70.0</td> <td style="text-align: center;">A</td> </tr> <tr> <td>Maximum instantaneous forward voltage at 3.0A</td> <td style="text-align: center;">V_F</td> <td style="text-align: center;">0.85</td> <td style="text-align: center;">0.95</td> <td style="text-align: center;">V</td> </tr> <tr> <td>Maximum DC reverse current at rated DC blocking voltage</td> <td style="text-align: center;">I_R</td> <td colspan="2" style="text-align: center;">0.1</td> <td rowspan="2" style="text-align: center;">mA</td> </tr> <tr> <td style="text-align: right;">$T_A=25^\circ\text{C}$</td> <td></td> <td colspan="2" style="text-align: center;">2.0</td> </tr> <tr> <td>Typical junction capacitance (NOTE 1)</td> <td style="text-align: center;">C_J</td> <td colspan="2" style="text-align: center;">200</td> <td style="text-align: center;">pF</td> </tr> <tr> <td>Typical thermal resistance (NOTE 2)</td> <td style="text-align: center;">$R_{\theta JA}$</td> <td colspan="2" style="text-align: center;">75.0</td> <td style="text-align: center;">°C/W</td> </tr> <tr> <td>Operating junction temperature range</td> <td style="text-align: center;">T_J</td> <td colspan="2" style="text-align: center;">-55 to +150</td> <td style="text-align: center;">°C</td> </tr> <tr> <td>Storage temperature range</td> <td style="text-align: center;">T_{STG}</td> <td colspan="2" style="text-align: center;">-55 to +150</td> <td style="text-align: center;">°C</td> </tr> </tbody> </table>	SYMBOLS	SS315	SS320	UNITS	Maximum repetitive peak reverse voltage	V_{RRM}	150	200	V	Maximum RMS voltage	V_{RMS}	105	140	V	Maximum DC blocking voltage	V_{DC}	150	200	V	Maximum average forward rectified current 0.375" (9.5mm) lead length (see fig. 1)	$I_{(AV)}$	3.0		A	Peak forward surge current 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	70.0		A	Maximum instantaneous forward voltage at 3.0A	V_F	0.85	0.95	V	Maximum DC reverse current at rated DC blocking voltage	I_R	0.1		mA	$T_A=25^\circ\text{C}$		2.0		Typical junction capacitance (NOTE 1)	C_J	200		pF	Typical thermal resistance (NOTE 2)	$R_{\theta JA}$	75.0		°C/W	Operating junction temperature range	T_J	-55 to +150		°C	Storage temperature range	T_{STG}	-55 to +150		°C
SYMBOLS	SS315	SS320	UNITS																																																													
Maximum repetitive peak reverse voltage	V_{RRM}	150	200	V																																																												
Maximum RMS voltage	V_{RMS}	105	140	V																																																												
Maximum DC blocking voltage	V_{DC}	150	200	V																																																												
Maximum average forward rectified current 0.375" (9.5mm) lead length (see fig. 1)	$I_{(AV)}$	3.0		A																																																												
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	70.0		A																																																												
Maximum instantaneous forward voltage at 3.0A	V_F	0.85	0.95	V																																																												
Maximum DC reverse current at rated DC blocking voltage	I_R	0.1		mA																																																												
$T_A=25^\circ\text{C}$		2.0																																																														
Typical junction capacitance (NOTE 1)	C_J	200		pF																																																												
Typical thermal resistance (NOTE 2)	$R_{\theta JA}$	75.0		°C/W																																																												
Operating junction temperature range	T_J	-55 to +150		°C																																																												
Storage temperature range	T_{STG}	-55 to +150		°C																																																												
<p>Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C. 2. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted</p>																																																																

RATINGS AND CHARACTERISTIC CURVES SS315 THRU SS320


AVERAGE FORWARD RECTIFIED CURRENT, AMPERES

FIG. 1- FORWARD CURRENT DERATING CURVE

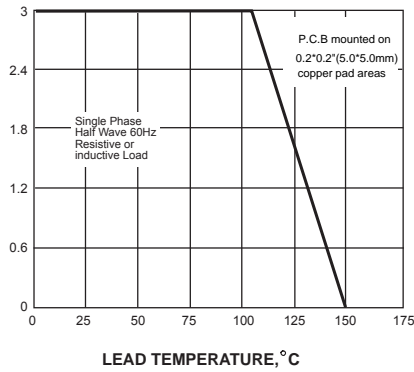


PEAK FORWARD SURGE CURRENT, AMPERES

FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

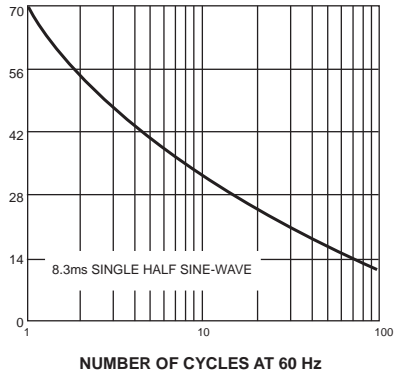


INSTANTANEOUS FORWARD CURRENT, AMPERES

FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

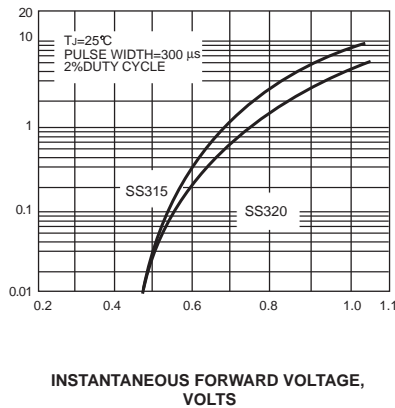


INSTANTANEOUS REVERSE CURRENT, MILLIAMPERES

FIG. 4-TYPICAL REVERSE CHARACTERISTICS

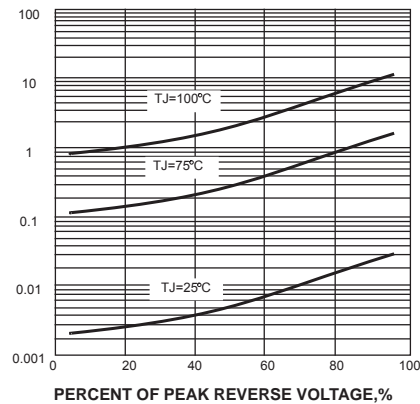

JUNCTION CAPACITANCE, pF

FIG. 5-TYPICAL JUNCTION CAPACITANCE

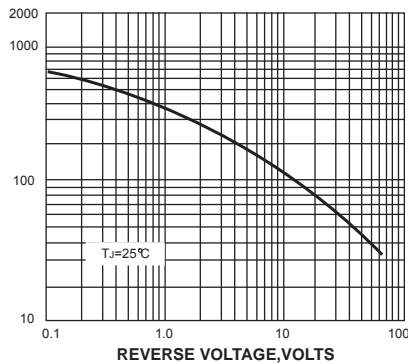

TRANSIENT THERMAL IMPEDANCE, °C/W

FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

