


<b>SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER</b>	Reverse Voltage - 20 to 100 Volts Forward Current -3.0 Amperes																																																																																																																					
<p style="text-align: center;"><b>DO-214AC/SMA</b></p>  <p style="text-align: center; font-size: small;">Dimensions in inches and (millimeters)</p>	<p><b>Features</b></p> <ul style="list-style-type: none"> <li>◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0</li> <li>◆ For surface mounted applications</li> <li>◆ Metal silicon junction, majority carrier conduction</li> <li>◆ Low power loss, high efficiency</li> <li>◆ Built-in strain relief, ideal for automated placement</li> <li>◆ High forward surge current capability</li> <li>◆ High temperature soldering guaranteed: 260°C/10 seconds at terminals</li> </ul> <p><b>Mechanical Data</b></p> <p><b>Case:</b> JEDEC DO-214AC molded plastic body  <b>Terminals:</b> leads solderable per MIL-STD-750, Method 2026  <b>Polarity:</b> Color band denotes cathode end  <b>Mounting Position:</b> Any  <b>Weight:</b> 0.002 ounce, 0.07 grams</p>																																																																																																																					
<b>MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS</b>																																																																																																																						
Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.																																																																																																																						
	<table border="1" style="width:100%; border-collapse: collapse; font-size: x-small;"> <thead> <tr> <th style="width:15%;">SYMBOLS</th> <th>SS32</th> <th>SS33</th> <th>SS34</th> <th>SS35</th> <th>SS36</th> <th>SS38</th> <th>SS310</th> <th>UNITS</th> </tr> </thead> <tbody> <tr> <td>Maximum repetitive peak reverse voltage</td> <td><math>V_{RRM}</math></td> <td>20</td> <td>30</td> <td>40</td> <td>50</td> <td>60</td> <td>80</td> <td>100</td> <td>V</td> </tr> <tr> <td>Maximum RMS voltage</td> <td><math>V_{RMS}</math></td> <td>14</td> <td>21</td> <td>28</td> <td>35</td> <td>42</td> <td>56</td> <td>70</td> <td>V</td> </tr> <tr> <td>Maximum DC blocking voltage</td> <td><math>V_{DC}</math></td> <td>20</td> <td>30</td> <td>40</td> <td>50</td> <td>60</td> <td>80</td> <td>100</td> <td>V</td> </tr> <tr> <td>Maximum average forward rectified current at <math>T_L</math> (see fig. 1)</td> <td><math>I_{(AV)}</math></td> <td colspan="6" style="text-align: center;">3.0</td> <td>A</td> </tr> <tr> <td>Peak forward surge current 8.3ms single half sine-wave superimposed on rated load</td> <td><math>I_{FSM}</math></td> <td colspan="6" style="text-align: center;">70.0</td> <td>A</td> </tr> <tr> <td>Maximum instantaneous forward voltage at 3.0A</td> <td><math>V_F</math></td> <td colspan="2" style="text-align: center;">0.55</td> <td colspan="2" style="text-align: center;">0.70</td> <td colspan="2" style="text-align: center;">0.85</td> <td>V</td> </tr> <tr> <td rowspan="2">Maximum DC reverse current at rated DC blocking voltage</td> <td rowspan="2"><math>I_R</math></td> <td colspan="4" style="text-align: center;">0.5</td> <td colspan="2" style="text-align: center;">0.1</td> <td rowspan="2">mA</td> </tr> <tr> <td colspan="4" style="text-align: center;">20</td> <td colspan="2" style="text-align: center;">10</td> </tr> <tr> <td>Typical junction capacitance (NOTE 1)</td> <td><math>C_J</math></td> <td colspan="3" style="text-align: center;">500</td> <td colspan="3" style="text-align: center;">300</td> <td>pF</td> </tr> <tr> <td>Typical thermal resistance (NOTE 2)</td> <td><math>R_{\theta JA}</math></td> <td colspan="6" style="text-align: center;">75.0</td> <td>°C/W</td> </tr> <tr> <td>Operating junction temperature range</td> <td><math>T_J</math></td> <td colspan="3" style="text-align: center;">-55 to +125</td> <td colspan="3" style="text-align: center;">-55 to +150</td> <td>°C</td> </tr> <tr> <td>Storage temperature range</td> <td><math>T_{STG}</math></td> <td colspan="6" style="text-align: center;">-55 to +150</td> <td>°C</td> </tr> </tbody> </table>	SYMBOLS	SS32	SS33	SS34	SS35	SS36	SS38	SS310	UNITS	Maximum repetitive peak reverse voltage	$V_{RRM}$	20	30	40	50	60	80	100	V	Maximum RMS voltage	$V_{RMS}$	14	21	28	35	42	56	70	V	Maximum DC blocking voltage	$V_{DC}$	20	30	40	50	60	80	100	V	Maximum average forward rectified current at $T_L$ (see fig. 1)	$I_{(AV)}$	3.0						A	Peak forward surge current 8.3ms single half sine-wave superimposed on rated load	$I_{FSM}$	70.0						A	Maximum instantaneous forward voltage at 3.0A	$V_F$	0.55		0.70		0.85		V	Maximum DC reverse current at rated DC blocking voltage	$I_R$	0.5				0.1		mA	20				10		Typical junction capacitance (NOTE 1)	$C_J$	500			300			pF	Typical thermal resistance (NOTE 2)	$R_{\theta JA}$	75.0						°C/W	Operating junction temperature range	$T_J$	-55 to +125			-55 to +150			°C	Storage temperature range	$T_{STG}$	-55 to +150						°C
SYMBOLS	SS32	SS33	SS34	SS35	SS36	SS38	SS310	UNITS																																																																																																														
Maximum repetitive peak reverse voltage	$V_{RRM}$	20	30	40	50	60	80	100	V																																																																																																													
Maximum RMS voltage	$V_{RMS}$	14	21	28	35	42	56	70	V																																																																																																													
Maximum DC blocking voltage	$V_{DC}$	20	30	40	50	60	80	100	V																																																																																																													
Maximum average forward rectified current at $T_L$ (see fig. 1)	$I_{(AV)}$	3.0						A																																																																																																														
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load	$I_{FSM}$	70.0						A																																																																																																														
Maximum instantaneous forward voltage at 3.0A	$V_F$	0.55		0.70		0.85		V																																																																																																														
Maximum DC reverse current at rated DC blocking voltage	$I_R$	0.5				0.1		mA																																																																																																														
		20				10																																																																																																																
Typical junction capacitance (NOTE 1)	$C_J$	500			300			pF																																																																																																														
Typical thermal resistance (NOTE 2)	$R_{\theta JA}$	75.0						°C/W																																																																																																														
Operating junction temperature range	$T_J$	-55 to +125			-55 to +150			°C																																																																																																														
Storage temperature range	$T_{STG}$	-55 to +150						°C																																																																																																														
<p><b>Note:</b> 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.                  2. P.C.B. mounted with 0.2x0.2" (5.0x5.0mm) copper pad areas</p>																																																																																																																						

**RATINGS AND CHARACTERISTIC CURVES SS32 THRU SS310**

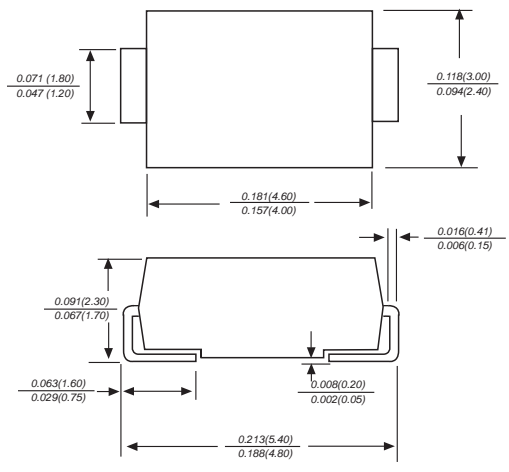