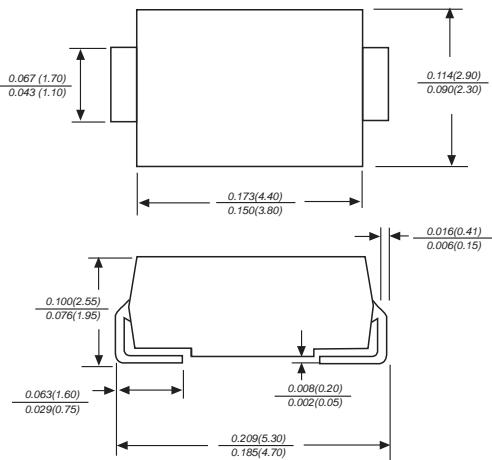


<p align="center"><b>SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER</b></p> <p align="center"><u>DO-214AC/SMA</u></p>  <p>Dimensions in inches and (millimeters)</p>	<p align="center">Reverse Voltage - 20 to 200 Volts Forward Current -5.0 Ampere</p> <p><b>Features</b></p> <ul style="list-style-type: none"> <li>→ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0</li> <li>→ For surface mounted applications</li> <li>→ Built-in strain relief, ideal for automated placement</li> <li>→ Low reverse leakage</li> <li>→ High forward surge current capability</li> <li>→ High temperature soldering guaranteed 250°C/10 seconds at terminals</li> </ul> <p><b>Mechanical Data</b></p> <p><b>Case :</b> Molded plastic body</p> <p><b>Terminals :</b> Solder plated, solderable per MIL-STD-750, Method 2026</p> <p><b>Polarity :</b> Polarity symbol marking on body</p> <p><b>Mounting Position :</b> Any</p> <p><b>Weight :</b> 0.0023 ounce, 0.07 grams</p>
--	---

### Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Parameter	SYMBOLS	SS52	SS54	SS56	SS58	SS510	SS515	SS520	UNITS		
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	20	40	60	80	100	150	200	V		
Maximum RMS voltage	V <sub>RMS</sub>	14	28	42	56	70	105	140	V		
Maximum DC blocking voltage	V <sub>DC</sub>	20	40	60	80	100	150	200	V		
Maximum average forward rectified current at T <sub>L</sub> =100°C	I <sub>(AV)</sub>	5.0						A			
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	I <sub>FSM</sub>	120.0						A			
Maximum instantaneous forward voltage at 5.0A	V <sub>F</sub>	0.55		0.70		0.85		0.95			
Maximum DC reverse current T <sub>A</sub> =25°C at rated DC blocking voltage T <sub>A</sub> =125°C	I <sub>R</sub>	0.5 50		0.05 10							
Typical thermal resistance	R <sub>QJA</sub>	80.0						°C/W			
Operating junction temperature range	T <sub>J</sub>	-55 to +150						°C			
Storage temperature range	T <sub>STG</sub>	-55 to +150						°C			

## Ratings And Characteristic Curves

FIG. 1- DERATING CURVE OUTPUT RECTIFIED CURRENT

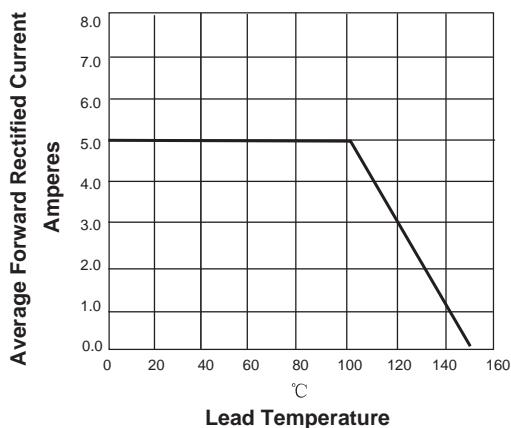


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PERLEG

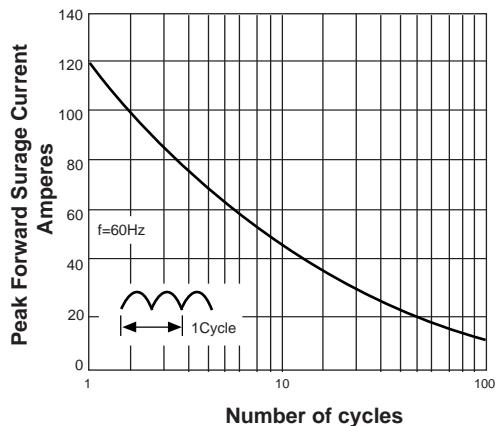


FIG. 3-TYPICAL FORWARD VOLTAGE CHARACTERISTICS

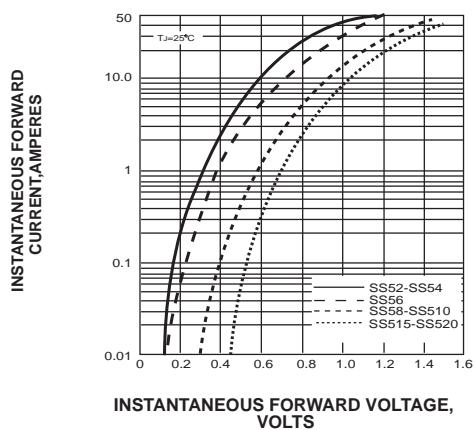


FIG. 4-TYPICAL REVERSE LEAKAGE CHARACTERISTICS

