


P.C.B Layout (copper-sided view)

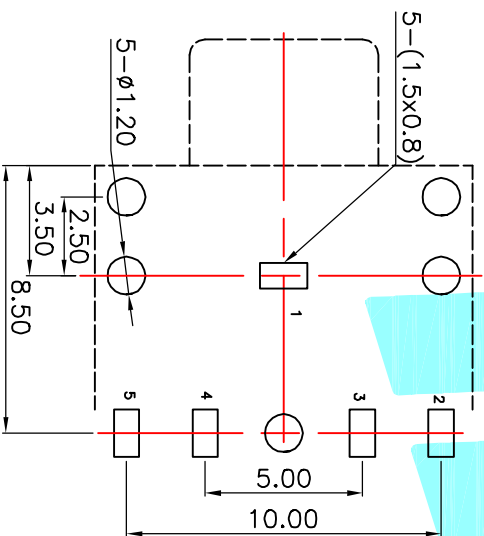

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20℃~70℃
 Operating force:3-20N
 Operating Life:5,000cycles

P/N	PJ-3126-A	PJ-3126-B	PJ-3126-C	PJ-3126-D
	PJ-3126A-A	PJ-3126A-B	PJ-3126A-C	PJ-3126A-D
Schematic				

② Terminal	5	Phosphor bronze	Au Plating			
① Housing	1	Nylon	Black			
ITEM	PART NAME	TERNO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE		ELECTRONICS CO.,LTD		
DRAWN		J.LX.Zhong		2013/11/11		PHONE JACKES
CHECKED						PJ-3126
APPROVALS						
TOLERANCES ARE		30 ^{±0.15}	±0.30	ANGLE	±2°	SCALE: 1:1
		10 ^{±0.30}	±0.20	UNIT: mm		PROJ.
		5 ^{±0.10}	±0.15	DRAWING NO.		SHEET 1 OF 1
		~ 5	±0.10			
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			