


Recommended PCB Layout

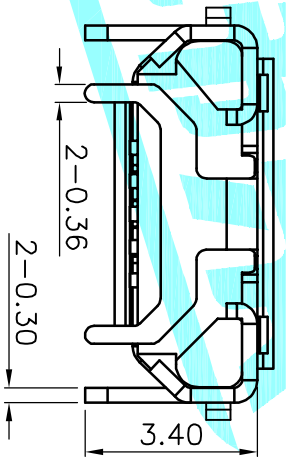

SPECIFICATIONS

1.RATING: DC30V 1.0A
2.MECHANICAL LIFE: 10,000 CYCLES.

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.																												
	A		NEW																															
<table border="1"> <tr> <td>APPROVALS</td> <td>DATE</td> <td>TITLE:</td> <td>PART NO.</td> <td>SCALE:</td> <td>PROJ.</td> </tr> <tr> <td>DRAWN JKUNLLU</td> <td>2015/3/29</td> <td>USB CONNECTOR</td> <td>U-F-M5DD-Y-L</td> <td>1:1</td> <td>PROJ. 1 OF 1</td> </tr> <tr> <td>CHECKED</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>APPROVALS</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </table>							APPROVALS	DATE	TITLE:	PART NO.	SCALE:	PROJ.	DRAWN JKUNLLU	2015/3/29	USB CONNECTOR	U-F-M5DD-Y-L	1:1	PROJ. 1 OF 1	CHECKED						APPROVALS									
APPROVALS	DATE	TITLE:	PART NO.	SCALE:	PROJ.																													
DRAWN JKUNLLU	2015/3/29	USB CONNECTOR	U-F-M5DD-Y-L	1:1	PROJ. 1 OF 1																													
CHECKED																																		
APPROVALS																																		
<table border="1"> <tr> <td>ITEM</td> <td>PART NAME</td> <td>TER'NO.</td> <td>QTY.</td> <td>MATERIAL</td> <td>FINISHING</td> <td>REMARK</td> </tr> <tr> <td>③</td> <td>Shell</td> <td>---</td> <td>1</td> <td>Phosphor Bronze</td> <td>Sn Plated</td> <td></td> </tr> <tr> <td>②</td> <td>Contact</td> <td>---</td> <td>5</td> <td>Phosphor Bronze</td> <td>Au Plated</td> <td></td> </tr> <tr> <td>①</td> <td>Housing</td> <td>---</td> <td>1</td> <td>LCP</td> <td>Black</td> <td></td> </tr> </table>							ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK	③	Shell	---	1	Phosphor Bronze	Sn Plated		②	Contact	---	5	Phosphor Bronze	Au Plated		①	Housing	---	1	LCP	Black	
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK																												
③	Shell	---	1	Phosphor Bronze	Sn Plated																													
②	Contact	---	5	Phosphor Bronze	Au Plated																													
①	Housing	---	1	LCP	Black																													
<table border="1"> <tr> <td>TOLERANCES ARE</td> <td>30^{±0.15}</td> <td>±0.30</td> <td>ANGLE</td> <td>±2'</td> <td>DRAWING NO.</td> <td></td> </tr> <tr> <td></td> <td>10^{±0.10}</td> <td>±0.25</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td>5^{±0.10}</td> <td>±0.20</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td>~ 5</td> <td>±0.15</td> <td></td> <td></td> <td></td> <td></td> </tr> </table>							TOLERANCES ARE	30 ^{±0.15}	±0.30	ANGLE	±2'	DRAWING NO.			10 ^{±0.10}	±0.25						5 ^{±0.10}	±0.20						~ 5	±0.15				
TOLERANCES ARE	30 ^{±0.15}	±0.30	ANGLE	±2'	DRAWING NO.																													
	10 ^{±0.10}	±0.25																																
	5 ^{±0.10}	±0.20																																
	~ 5	±0.15																																



HIRONO ELECTRONICS CO., LTD