

HY604808

Electrical Specification @25°C

RoHS Compliant (PB Free)

Operating Temperature Range: 0°C ~ +70°C

Isolation: 1500Vrms 0.5mA 60sec (P1~24 to P25~48)

OCL: 350uH Minimum @100KHz 100mV with 8mADC

Insertion Loss: -1.4dB Maximum @1MHz ~ 100MHz

Return Loss: -16dB Minimum @1MHz ~ 30MHz / -14.4dB Minimum @40MHz

-13.1dB Minimum @50MHz / -12dB Minimum @60MHz ~ 80MHz


-10dB Minimum @100MHz

Different to Common Mode Rejection: -45dB Minimum @30MHz / -40dB Minimum @60MHz


-35dB Minimum @100MHz

Crosstalk: -35dB Minimum @30MHz / -32dB Minimum @60MHz / -28dB Minimum @100MHz

Schematics

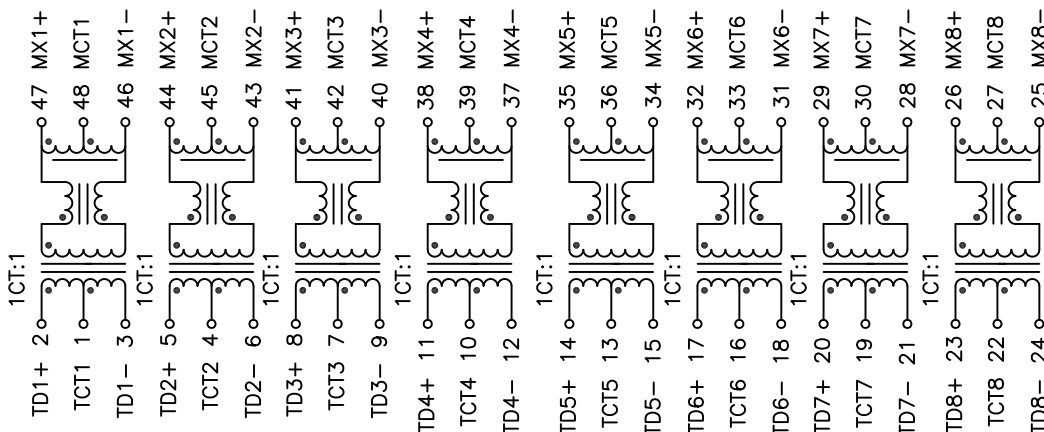

Mechanical Dimensions

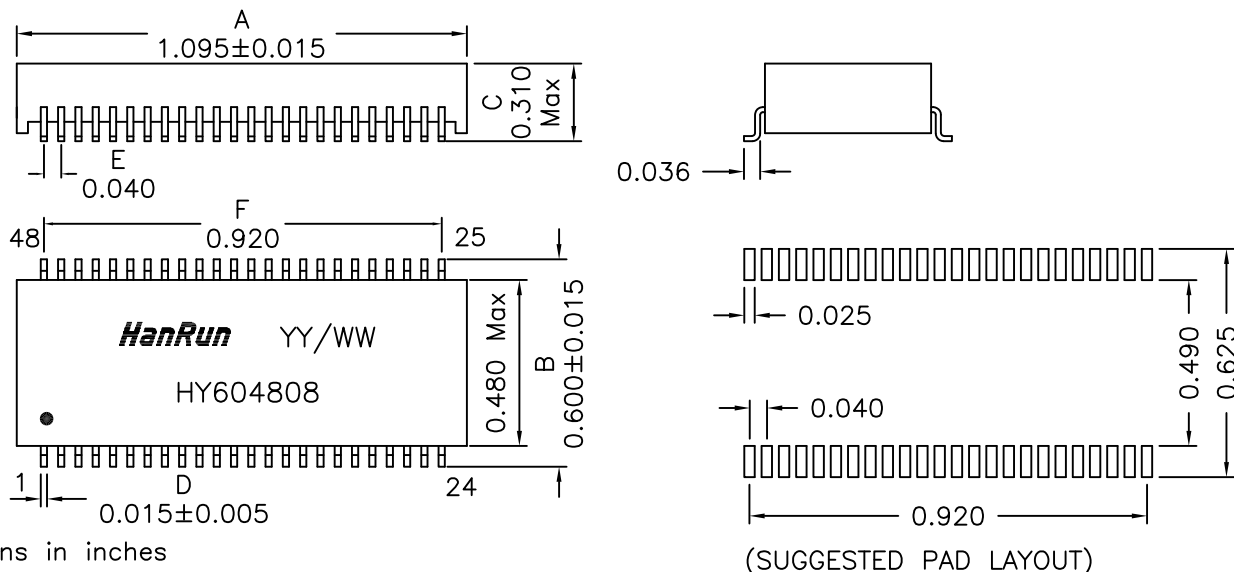

Dimensions in inches

Unless otherwise specified, Tolerance: .xxx ±0.010

REV.: A/3