


Surface Mount Transient Voltage Suppressors

High temperature stability and high reliability conditions



DO-218AB



FEATURES

- Junction passivation optimized design passivated anisotropic rectifier technology.
- $T_J=175^\circ\text{C}$ capability suitable for high reliability and automotive requirement.
- Available in uni-directional polarity only.
- Low leakage current.
- Low forward voltage drop.
- High surge capability.
- Meets ISO16750-2 surge specification(varied by test condition).
- Meets MSL-1, per J-STD-020, LF maximum peak of 260°C .
- AEC-Q101 qualified.
- Compliant to RoHS directive 2011/65/EU and in accordance to WEEE 2002/96/EC.

TYPICAL APPLICATIONS

Use in sensitive electronics protection against voltage transients induced by inductive load switching and lighting, especially for automotive load dump protection application.

MECHANICAL DATA

Case: DO-218AB

Molding compound meets UL 94V-0 flammability rating

Base P/NHE3-RoHS-compliant, AEC-Q101 qualified

Terminals: Matte tin plated leads, solderable per J-STD-002

PRIMARY CHARACTERISTICS	
V_R	10V to 36V
P_{PP} (10/1000 μs)	4600W
P_{PP} (10/10000 μs)	3600W
P_D	6W
I_{FSM}	600A
T_{Jmax}	175°C
Package	DO-218AB

MAXIMUM RATINGS($T_C=25^\circ\text{C}$, RH=45%-75%, unless otherwise noted)			
Parameter	Symbol	Value	Unit
Peak pulse power dissipation at 10/1000 μs waveform	P_{PP}	4600	Watts
Peak pulse power dissipation at 10/10000 μs waveform		3600	Watts
Power dissipation on infinite heat sink at $T_C=25^\circ\text{C}$	P_D	6.0	Watts
Peak pulse current with 10/1000 μs waveform	$I_{PPM}^{(1)}$	See next table	Amps
Peak forward surge current, 8.3ms single half sine-wave	I_{FSM}	600	Amps
Operating junction and storage temperature range	T_J, T_{STG}	-55 to +175	$^\circ\text{C}$
Typical thermal resistance, junction to case	$R_{\theta JC}$	0.95	$^\circ\text{C/W}$

Note

(1) Non-repetitive current pulse derated above $T_A=25^\circ\text{C}$

ELECTRICAL CHARACTERISTICS								
Part Number	V _R	I _T	I _R @V _R		V _{BR} @I _T		V _C @I _{PP}	I _{PP}
Uni-polar	V	mA	μA@25°C	μA@175°C	min(V)	max (V)	V	A
SM6S10A-AL	10.0	5	5	250	11.1	12.3	17.0	271.0
SM6S11A-AL	11.0	5	5	150	12.2	13.5	18.2	253.0
SM6S12A-AL	12.0	5	5	150	13.3	14.7	19.9	231.0
SM6S13A-AL	13.0	5	5	150	14.4	15.9	21.5	214.0
SM6S14A-AL	14.0	5	5	150	15.6	17.2	23.2	198.0
SM6S15A-AL	15.0	5	5	150	16.7	18.5	24.4	189.0
SM6S16A-AL	16.0	5	5	150	17.8	19.7	26.0	177.0
SM6S17A-AL	17.0	5	5	150	18.9	20.9	27.6	167.0
SM6S18A-AL	18.0	5	5	150	20.0	22.1	29.2	158.0
SM6S20A-AL	20.0	5	5	150	22.2	24.5	32.4	142.0
SM6S22A-AL	22.0	5	5	150	24.4	26.9	35.5	130.0
SM6S24A-AL	24.0	5	5	150	26.7	29.5	38.9	118.0
SM6S26A-AL	26.0	5	5	150	28.9	31.9	42.1	109.0
SM6S28A-AL	28.0	5	5	150	31.1	34.4	45.4	101.0
SM6S30A-AL	30.0	5	5	150	33.3	36.8	48.4	95.0
SM6S33A-AL	33.0	5	5	150	36.7	40.6	53.3	86.0
SM6S36A-AL	36.0	5	5	150	40.0	44.2	58.1	79.0

Note:

①. For all types maximum V_F=1.9V at I_F=100A measured on 8.3ms single half sine-wave or equivalent square wave, duty cycle=4 pulses per minute maximum.

②.Surge waveform: 10/1000μs

V_R: Stand-off voltage -- Maximum voltage that can be applied


V_{BR}: Breakdown voltage

V_C: Clamping voltage -- Peak voltage measured across the suppressor at a specified I_{PP}

I_R: Reverse leakage current

I_T: Test current

ORDERING INFORMATION

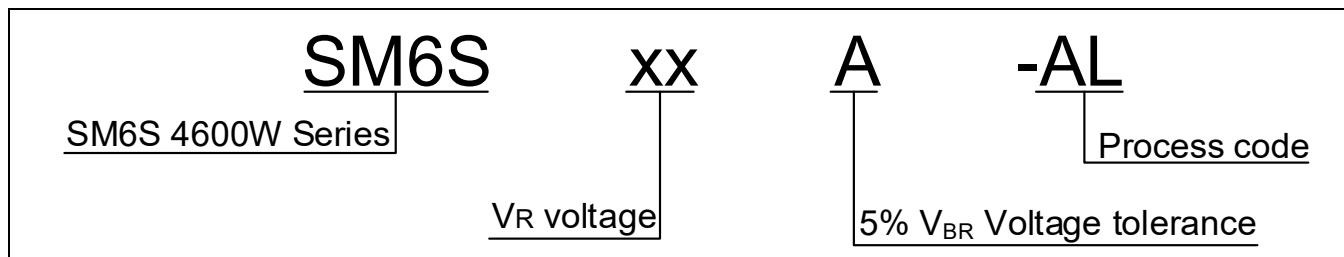



RATINGS AND CHARACTERISTICS CURVES (T_A=25°C, unless otherwise noted)

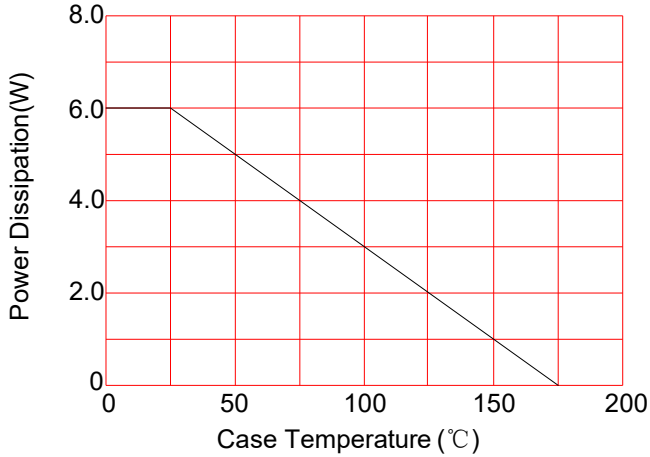


FIG.1: Power Derating Curve

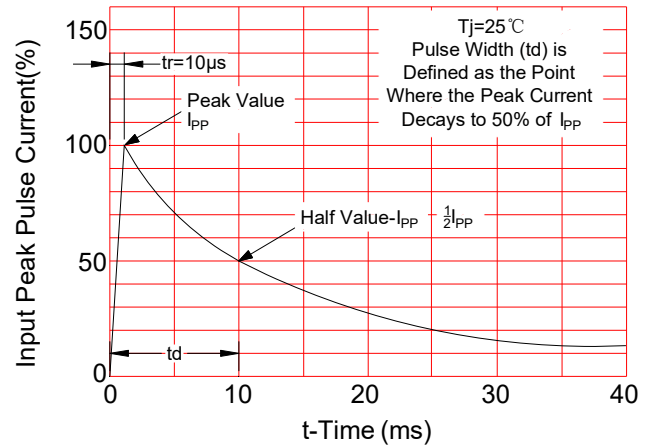


FIG.2: Pulse Waveform

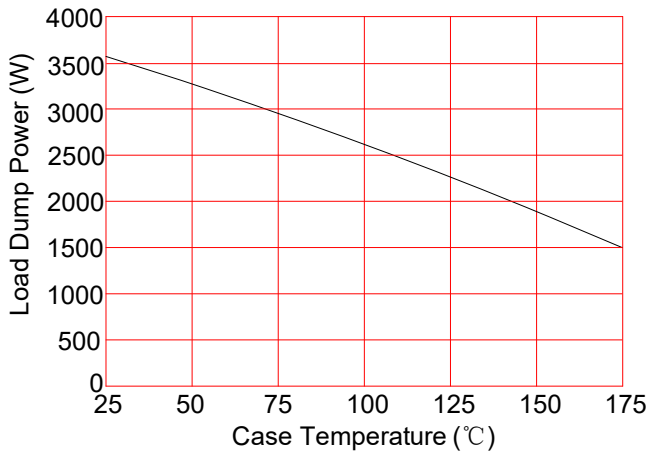


FIG.3: Load Dump Power Characteristics (10ms Exponential Waveform)

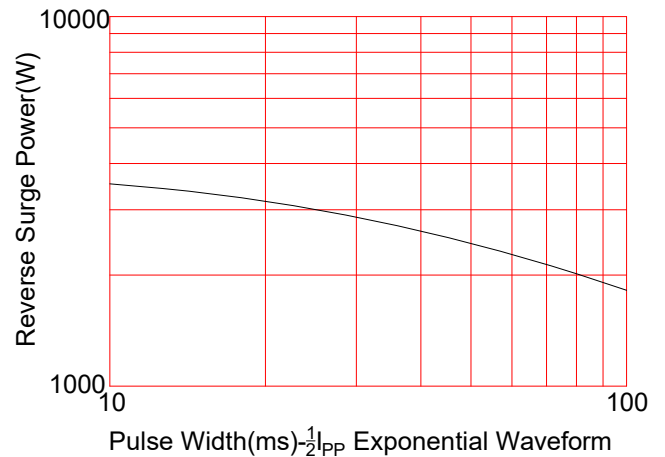


FIG.4: Reverse Power Capability


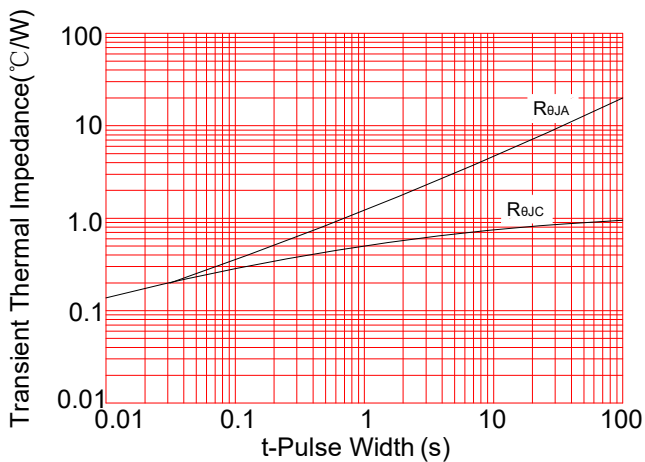


FIG.5: Typical Transient Thermal Impedance

MARKING

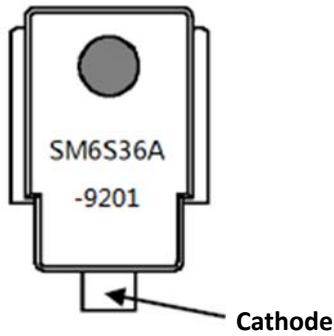

SM	Surface Mount
6S	$P_D=6W$
36	$V_R:36V$
A	Uni-directional

x201:


2019	2020	2021	2022	2023	2024
9	0	1	2	3	4
2025	2026	2027	2028	...	
5	6	7	8	...	

9x01: Month, 1、2、3 ~ 9、O、N、D


92xx: Lot number

SOLDERING PARAMETERS

Reflow Condition		Pb-Free assembly (see figure at right)
Pre Heat	-Temperature Min ($T_{s(min)}$)	+150°C
	-Temperature Max($T_{s(max)}$)	+200°C
	-Time (Min to Max) (t_s)	60-180 secs.
Average ramp up rate (Liquidus Temp (T_L)to peak)		3°C/sec. Max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/sec. Max
Reflow	-Temperature(T_L)(Liquidus)	+217°C
	-Temperature(t_L)	60-150 secs.
Peak Temp (T_P)		+260(+0/-5)°C
Time within 5°C of actual Peak Temp (t_p)		20-40secs.
Ramp-down Rate		6°C/sec. Max
Time 25°C to Peak Temp (T_P)		8 min. Max
Do not exceed		+260°C

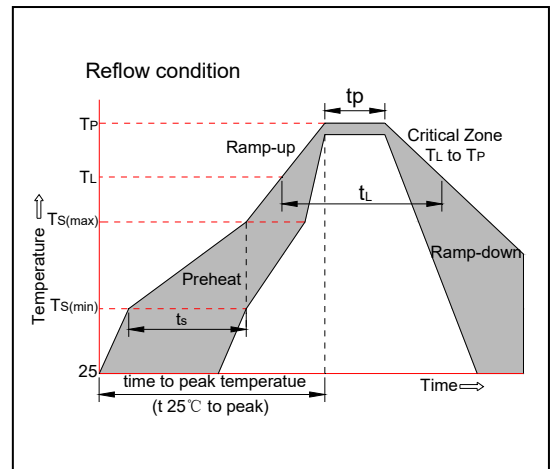


PACKAGE MECHANICAL DATA

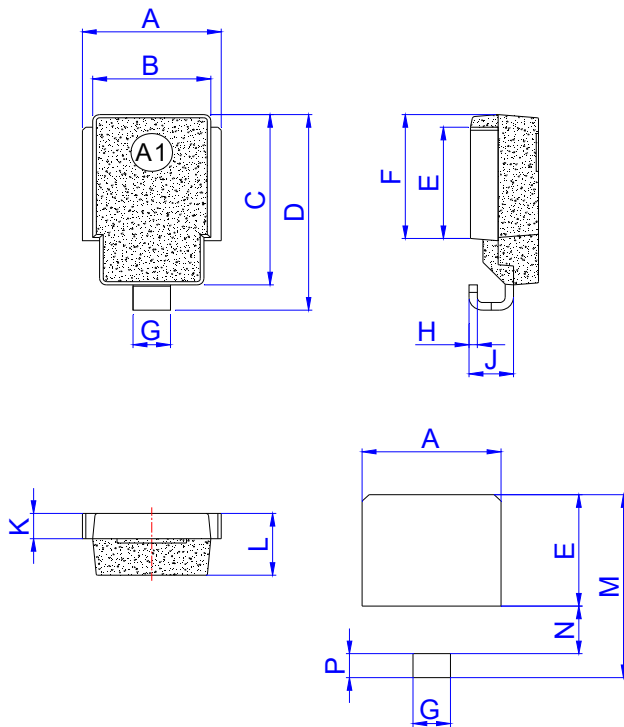

DO-218AB

Ref.	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	9.5	10.5	0.374	0.413
B	8.3	8.7	0.327	0.342
C	13.3	13.7	0.524	0.539
D	15.0	16.0	0.592	0.628
E	8.5	9.1	0.335	0.358
F	9.5	10.1	0.374	0.398
G	2.4	3.0	0.094	0.118
H	0.5	0.7	0.020	0.028
J	2.7	3.7	0.106	0.146
K	1.9	2.1	0.075	0.083
L	4.7	5.1	0.185	0.201
M	14.2	14.8	0.559	0.583
N	3.5	4.1	0.138	0.161
P	1.6	2.2	0.063	0.087

TAPE AND REEL SPECIFICATION-DO-218AB

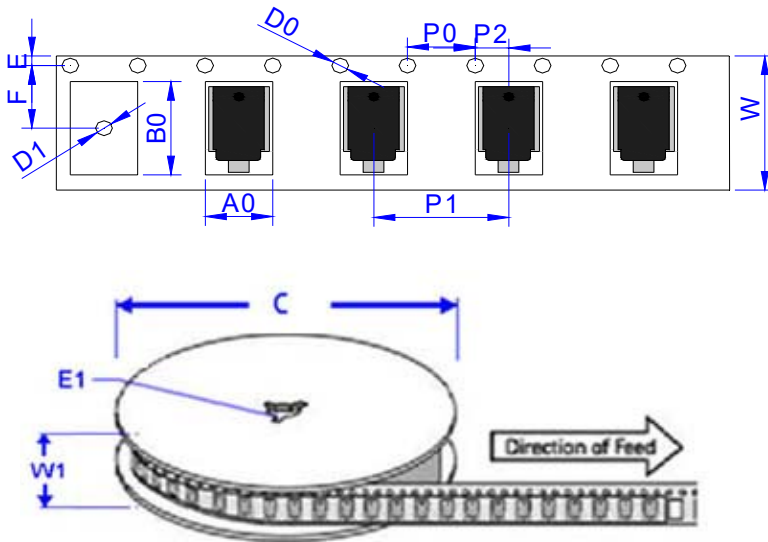

Ref.	Dimensions	
	Millimeters	Inches
A0	10.80 ± 0.3	0.425± 0.012
B0	16.13 ± 0.3	0.635 ± 0.012
C	330.0 ± 0.3	13.0 ± 0.012
D0	1.55 ± 0.2	0.061 ± 0.008
D1	1.55 ± 0.2	0.061± 0.008
E	1.75 ± 0.2	0.069 ± 0.008
E1	13.30 ± 0.2	0.524 ± 0.008
F	11.50 ± 0.2	0.453 ± 0.008
P0	4.00 ± 0.2	0.157 ± 0.008
P1	16.00 ± 0.2	0.630 ± 0.008
P2	2.00 ± 0.2	0.079 ± 0.008
W	24.00 ± 0.2	0.945 ± 0.008
W1	25.85 ± 0.2	1.018 ± 0.008

ORDERING INFORMATION				
PART No.	UNIT WEIGHT (g) typ	REEL (PCS)	PER CARTON (PCS)	DESCRIPTION
SM6SxxA-AL	2.985	750	3000	13 inch reel pack



JieJie products are not designed for, and shall not be used for, any purpose (including, without limitation, automotive, military, aerospace, medical, life-saving, life-sustaining or nuclear facility applications, devices intended for surgical implant into the body, or any other application in which the failure or lack of desired operation of the product may result in personal injury, death, or property damage) other than those expressly set forth in applicable JieJie product documentation. Warranties granted by JieJie shall be deemed void for products used for any purpose not expressly set forth in applicable JieJie documentation. JieJie shall not be liable for any claims or damages arising out of products used in applications not expressly intended by JieJie as set forth in applicable JieJie documentation. The sale and use of JieJie products is subject to JieJie terms and conditions of sale, unless otherwise agreed by JieJie.

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co.,Ltd assumes no responsibility for the consequences of use without consideration for such information nor use beyond it.

Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement.

Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information.

This document is the 2.2nd version which is made in 7-Apr.-2022. This document supersedes and replaces all information previously supplied.

 is a registered trademark of Jiangsu JieJie Microelectronics Co.,Ltd.

Copyright©2022 Jiangsu JieJie Microelectronics Co.,Ltd. Printed All rights reserved.