

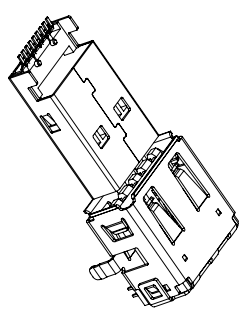




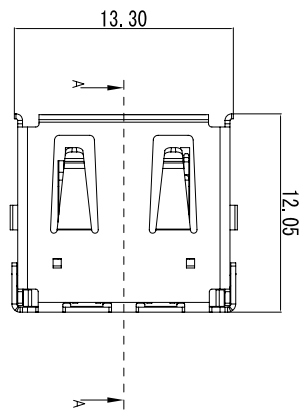



MAPX	MODIFICATION	DATE
------	--------------	------



公头连接器可从正方向插入

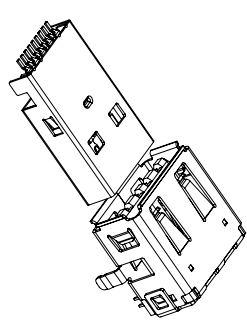

公头连接器可从反方向插入

- NOTES:
- 1.MATERIAL:
 - 1.1 HOUSING: THERMOPLASTIC COLOR: BLACK
 - 1.2 CONTACT: COPPER ALLOY
 - 1.3 SHELL: STAINLESS STEEL OR K7
 2. PLATING:
 - CONTACT:
 - 1). GOLD FLASH CONTACT AREA:120u" TIN SOLDER;NICKEL OVER ALL
 - 2). 5u" GOLD CONTACT AREA;120u" TIN SOLDER;NICKEL OVER ALL
 - 3). 15u" GOLD CONTACT AREA;120u" TIN SOLDER;NICKEL OVER ALL
 - SHELL: NICKEL OVER ALL
 - 4:ENVIRONMENTAL:
 - OPERATION TEMPERATURE: -40° C~+85° C
 - 5:PRODUCT COMPLIANT TO THE REQUEST OF ROHS

PCB LAYOUT T=2.1mm(max)
TOP VIEW TOLERANCE:±0.1mm
2层或以上PCB建议布线方式

PCB LAYOUT T=2.1mm(max)
TOP VIEW TOLERANCE:±0.1mm
单层PCB建议布线方式

产品图

PRODUCT CHART DWG

公差一览表	
TOLERANCE UNLESS OTHERWISE	公差一览表
X .±0.25	X .±5°
X .±0.20	X .±2°
.XX .±0.15	.XX .±1°
.XXX .±0.10	.XXX .±0.5°

深圳市精拓金电子有限公司

单位	MM	制图	2-Y-B	制图料号	
UNITS		DRAWING		PRODUCT PART NO.	
比例	1:1	审核		产品名称	USB 2.0 A Type 双向插 母座板端D型 3脚胶
SCALE		CHD		PRODUCT NO.	
日期	2013.05.09	核准		角法	
DATE		APPD		VIEW	
				版本	AO
				VER	