

REV.	MODIFICATION	ECN NO.	NAME	DATE
A/1				2015-9-16

产品规格说明: (specifications)

电器特性: (Electrical characteristics)

- 接触阻抗: Contact Resistance:
最大值30毫欧: (30 milliohms MAX)
- 耐电压: (Dielectric Withstanding Voltage):
500 伏特交流电 (500V AC AT Sea Level)
- 绝缘阻抗: (Insulation Resistance):
最小值1000兆欧姆 (1000 mega-ohms MIN)


材料: Material:

- 塑胶: (Housing): High Temperature Inert plastics,
UL 94V-0
 Black White 其它
- 端子: (Contact): PBT 耐高温塑胶 LCP, 重量温度250度, SS
- 外壳: (Shell): FRCC-SD

电镀: (Finish):

- 端子: (Contact): Plated Gold in Mating Area:
Tin On Solder Tails
接触点镀金 u" Bu" 5u" 30u" 脚镀锡。
- 外壳: (Shell): Nickel Plating 镀亮镍, 盐雾24H

注释: 1. 标示编号为“重点检测尺寸”, 图纸部分仅供参考, 因技术改良, 客户不同需求, 部分细节会与实物有区别, 请以实物为准。

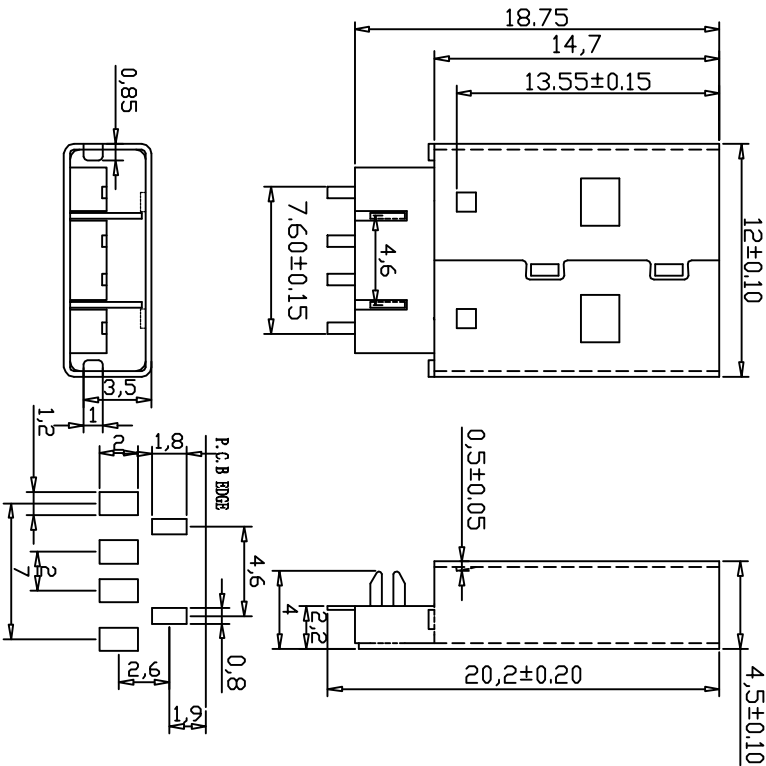

深圳市精拓金电子有限公司

产品名称: PRODUCT NAME	AM鱼叉PBT白胶 (磷端)	核准 Approved by	REV.: A/0	SCALE: 1:1
材质 Material	料号 Part No.	审核 Checked by	UNI T: mm	SHEET: 1 OF 1
表面 Surface	模号 Mold No.	制图 Drawn by	GENERAL TOLERANCES	
		李永来	X. ±0.30	X°. ±2°
			.X ±0.25	.X° ±0.5°
			.XX ±0.20	.XX° ±0.3°
			THIRD ANGLE	