
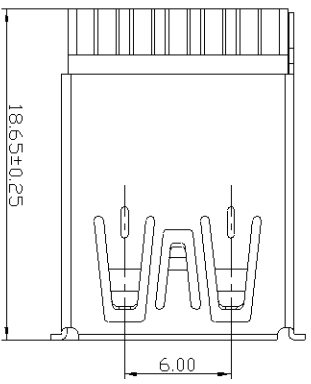
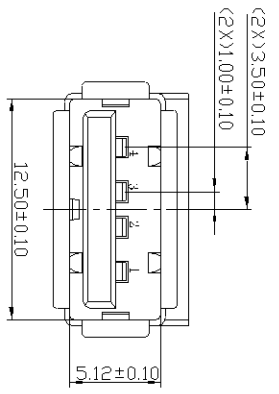
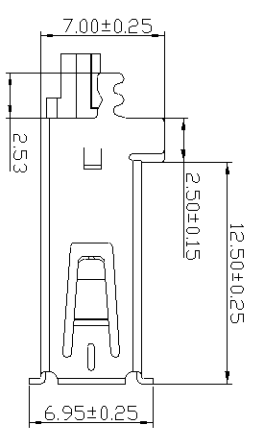


REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
A0	ECN120518032	新发行	xu dong bin	—	—	2012.05.18
A1	ECN130628008	变更料号	WEI			2013.06.28

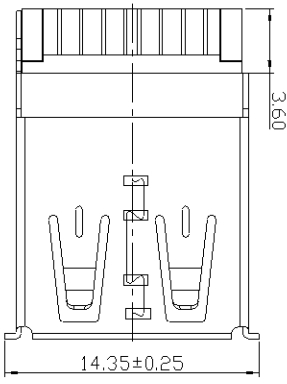

**SPECIFICATIONS:**

Contact current Rating:  
1.5 Amperes for pin1&pin4.  
Dielectric Withstanding Voltage:AC 500V(RMS)  
Insulation resistance:1000Megohms Minimum.  
Contact Resistance:  
30mΩ Max for pin1&pin4  
Mechanical Characteristics:  
Mating Force:35 Newtons.Maximum  
Umating Force:10 Newtons.Minimum.

**MATERIAL:**  
Housing: PBT+30%GF 94V-0 COLOR:BLACK  
Contact: copper alloy (T=0.25mm)  
Shell: Brass  
operating Temperature:-55°to+85°

**料号备注:**  
**CU2F016SXXTXXR**

- \*12"半金壳为GF
- \*13"半金壳为5U"
- \*14"半金壳为5U"
- \*15"半金壳为1.5U"
- \*16"半金壳为30U"


# 深圳市精拓金电子有限公司

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND

UNLESS OTHERWISE SPECIFIED TOLERANCES

METRIC	METRIC
X, +/-	0.35
.XX, +/-	0.25
FRACTIONS +/-	0.25
ANGLES +/-	2.00°
DIMENSIONS	

APPROVAL	日期	品名
制图 WEIMINGJUN	2012.05.18	规格
审核 xu dong bin	2012.05.18	料号



字格	工程图号:	版本:
A4	DWG-USBAF-049	A1