


MAPX	MODIFICATION	DATE
------	--------------	------

NOTE:
 1. Material:
 Housing: Thermoplastics (U94V-0(ROHS-HP))
 Contact: Phosphor Bronze C5191-2H/C2680-2H, T=0.25mm
 Shell: COPPER ALLOY T=0.30mm
 2. FINISH:
 Contact: 15u" Gold Plated on Contact Area,
 80u" Min. Tin Plated on Solder Area
 50u" Min. Nickel Underplating Over All.
 Shell: 50u" Min. Nickel Underplating Over All.
 3. Specification:
 3.1: Rating:
 3.2: Rated voltage 500V AC/DC. Rated current: 2 A Max.
 3.2: Electrical:
 Insulation Resistance(EIA-364-21):
 1000MΩ Min. at 500V/DC for 1Minute.
 Contact Resistance(EIA-364-22):
 30 mΩ Max. at 20mV Max, 50mA
 Dielectric Withstanding Voltage(EIA-364-20):
 No discharge, Flashover or breakdown at 500V/AC 1Minute
 4. Plug extraction force shall be between 1.0kgf and 2.00kgf
 5. Contact finish:
 01: Selective Gold Flash
 02: Selective Gold 3U"
 03: Selective Gold 5U"
 04: Selective Gold 15U"
 05: Selective Gold 30U"

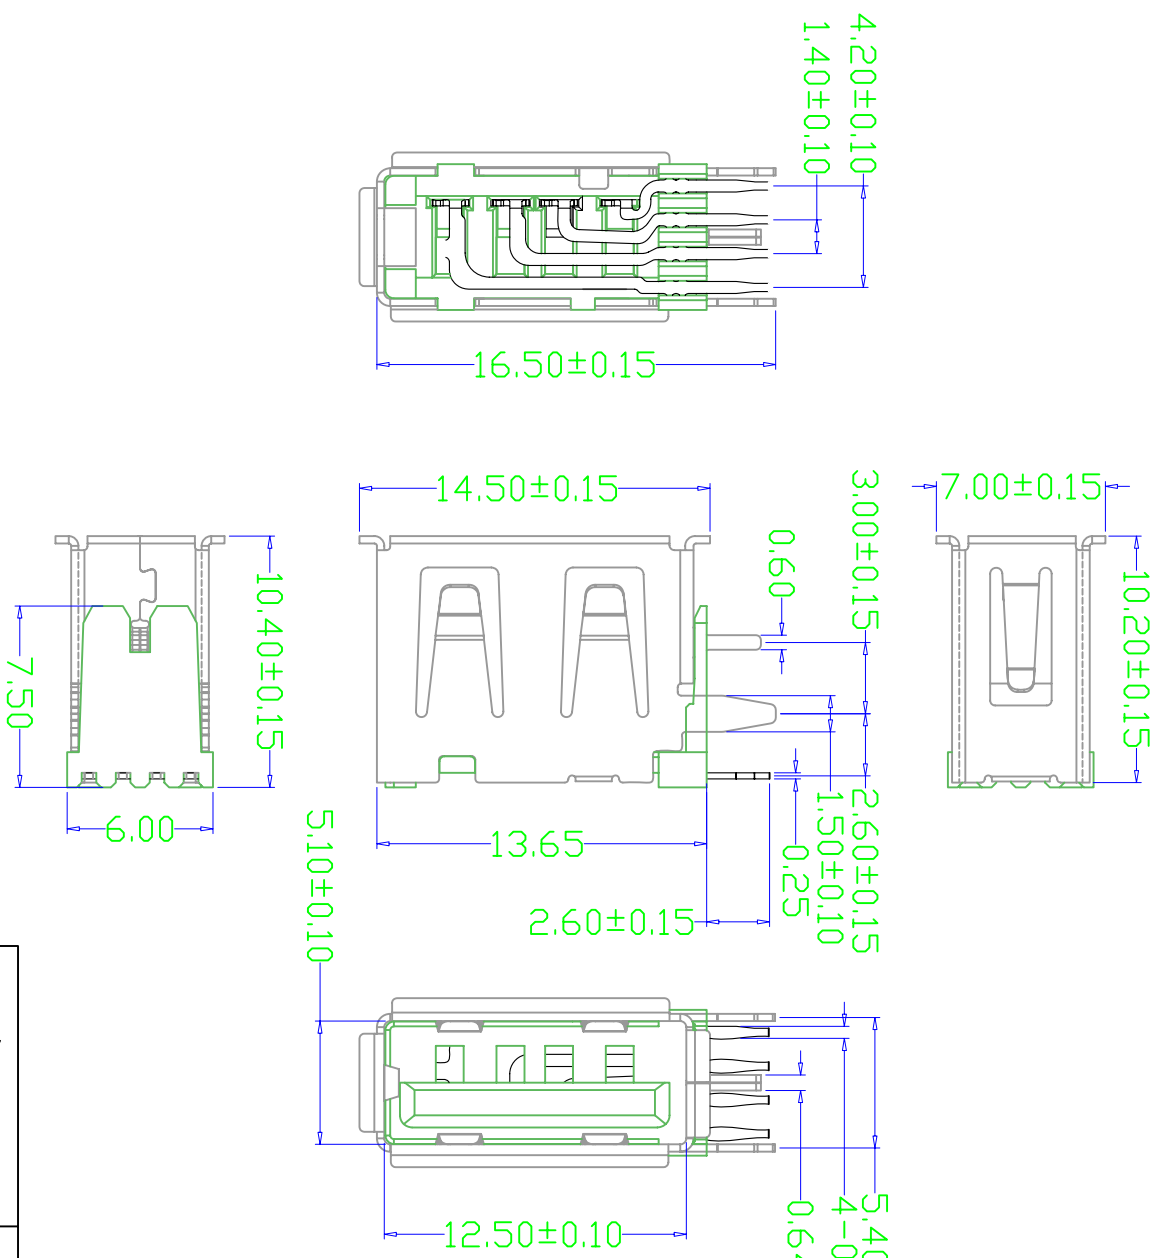

RECOMMENDED PCB LAYOUT
 GENERAL TOLERANCES: ±0.05

产品图

深圳市精拓金电子有限公司

PRODUCT CHART DMC
公差一览表

公差一览表	单位	制图	制图料号
TOLERANCE UNLESS OTHERWISE:	UNITS	DRAWING	PRODUCT PART NO.
X. ±0.25 X.	MM	审核	产品名称
.X. ±0.20 .X.	比例	制图	PRODUCT NO.
.XX ±0.15 .XX	日期	核准	角法
.XXX ±0.10 .XXX	DATE	APPD	版本

1 2 3 4 5 6 7 8 9 10
 G F E D C B A
 G F E D C B A