


| | | |
|------|--------------|------|
| MAPX | MODIFICATION | DATE |
|------|--------------|------|

NOTE:

- Material:
Housing: Thermoplastics (U94V-0(ROHS-HP))
Contact: Phosphor Bronze C5191-2H/C2680-2H, T=0.25mm
Shell: COPPER ALLOY T=0.30mm
- FINISH:
Contact: 15u" Gold Plated on Contact Area,
80u" Min. Tin Plated on Solder Area
50u" Min. Nickel Underplating Over All.
Shell: 50u" Min Nickel Underplating Over All.
- Specification:
3.1: Rating:
Rated voltage 500V AC/DC. Rated current: 2 A Max.
3.2: Electrical:
Insulation Resistance(EIA-364-21):
1000MΩ Min. at 500V/DC for 1Minute.
Contact Resistance(EIA-364-22):
30 mΩ Max. at 20mV Max, 50mA
Dielectric Withstanding Voltage(EIA-364-20):
No discharge, Flashover or breakdown at 500V/AC 1Minute
Plug extraction force shall be between 1.0kgf and 2.00kgf
- Plug extraction force shall be between 1.0kgf and 2.00kgf
- Contact finish:
01: Selective Gold Flash
02: Selective Gold 3U"
03: Selective Gold 5U"
04: Selective Gold 15U"
05: Selective Gold 30U"

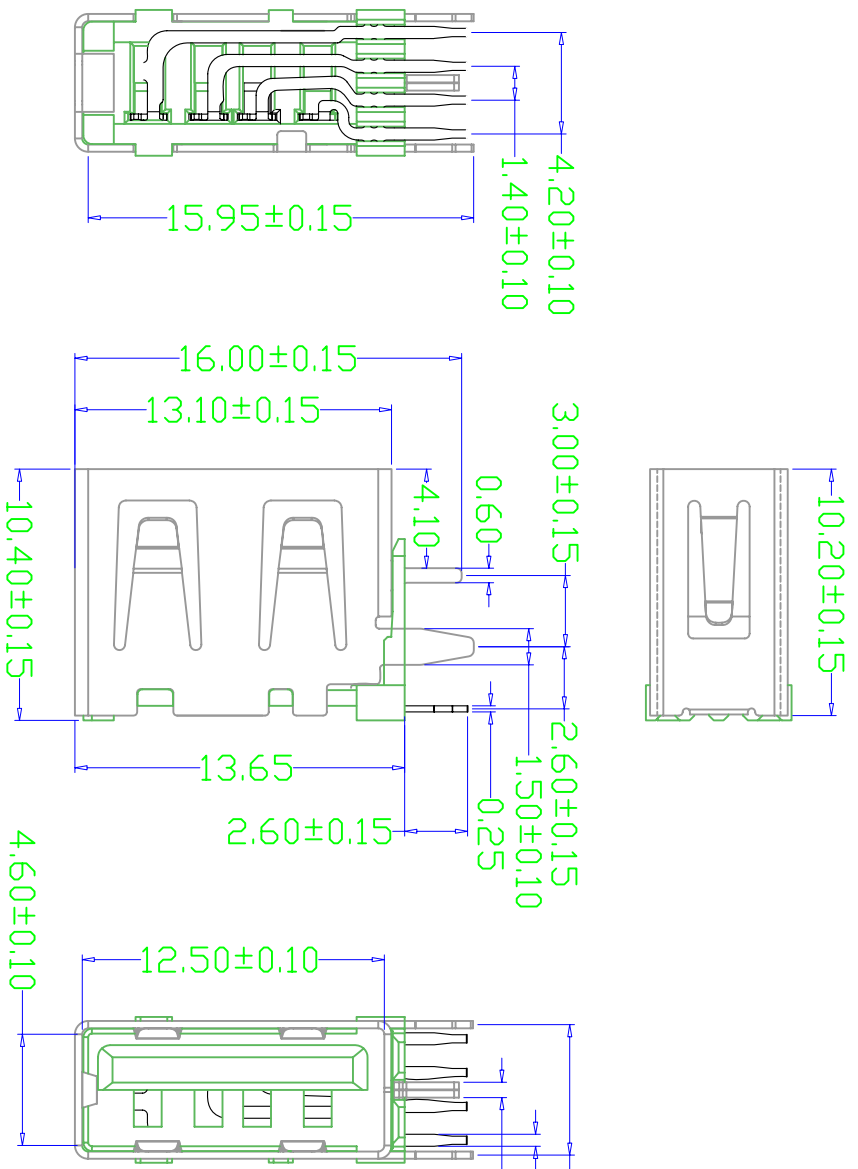

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCES: ±0.05

产品图

深圳市精拓金电子有限公司

| | | | | | | | |
|----------------------------|-------|-------|------------|---------|-------|------------------|-----------------------|
| 公差一览表 | | 单位 | | 制图 | | 制图料号 | |
| TOLERANCE UNLESS OTHERWISE | | UNITS | | DRAWING | | PRODUCT PART NO. | |
| X. | ±0.25 | X. | MM | 审核 | Z-Y-B | 产品名称 | USB AF10.5侧插短体三直脚无边成品 |
| .X | ±0.20 | .X | 1:1 | 制图 | | PRODUCT NO. | |
| .XX | ±0.15 | .XX | 日期 | 核准 | | 角法 | |
| .XXX | ±0.10 | .XXX | 2014.07.20 | APPD | | 版本 | A0 |
| | | | DATE | | | VIEW | |

G 1 2 3 4 5 6 7 8 9 10
F
E
D
C
B
A