
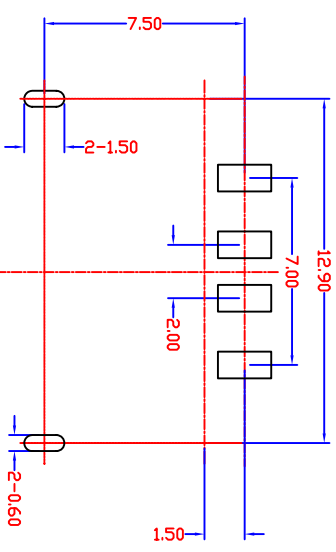
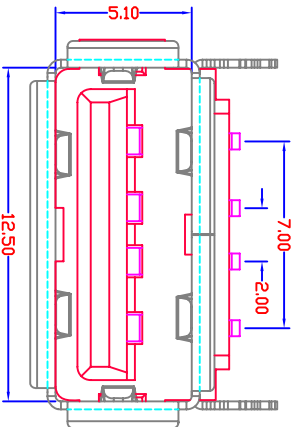
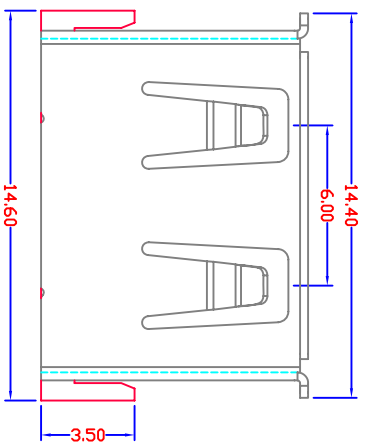


MAPX	MODIFICATION	DATE
------	--------------	------

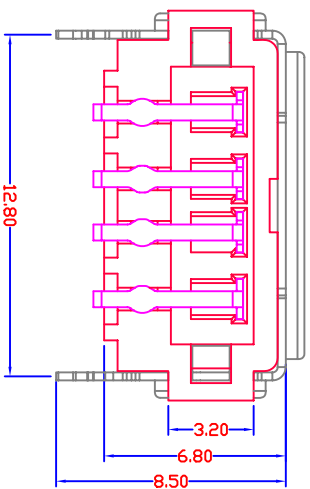

RECOMMENDED P.C.B LAYOUT

- Specification:**
- Electrical Characteristics:**
 Dielectric Withstanding Voltage: AC 500V/1MINUTE.
 Insulation Resistance: 1000 MΩ/Min.
 Contact Resistance: 30 mΩ/ Max.
 - Mechanical Characteristics:**
 INSERTION FORCE: 30N(3.06kgf) MAX
 EXTRACTION FORCE: 10~30N(1.02~3.06kgf)
 Durability:1500cycles.EXTRACTION FORCE:10~30N(1.02~3.06kgf)
 - Material:**
 Terminal: Phosphor Bronze, C5191/C2680R-EH T=0.25
 Plating: Gold 0.76 um Min plating over 1.27 um Min Nickel underplate, 2.54 um Min Sn selective plating on solder tail;
 Shell: Bronze, C2680R-H =0.30mm
 Plating: Nickel underplate 2.54 um Min;
 Housing: LCP Black
 - Environmental:**
 Operating Temperature: 0°C to +85°C.

产品图

深圳市精拓金电子有限公司

PRODUCT CHART DWG		公差一览表		单位		制图		制图料号	
TOLERANCE UNLESS OTHERWISE		UNITS		MM	Z-Y-B	DRAWING		JTJ-USB-A/F-10.0-035	
X	±0.15	X	±5°	比例	1:1	审核		产品名称	
X	±0.10	X	±2°	SCALE		CHKD		PRODUCT NO	
XX	±0.05	XX	±1°	日期	2012.04.1	核准		USB A/F SMT 短体前两脚有边	
XXX	±0.03	XXX	±0.5°	DATE		APPD		角法	
								版本	AD
								VER	