
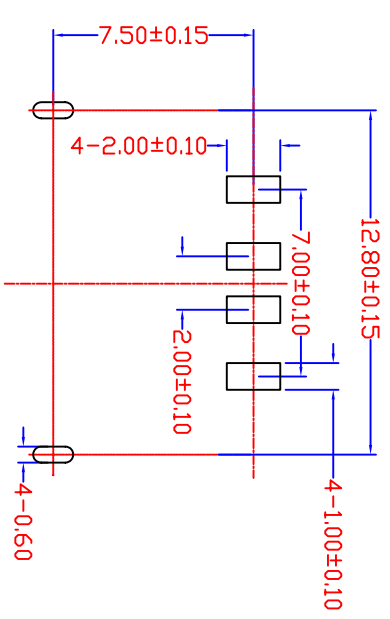
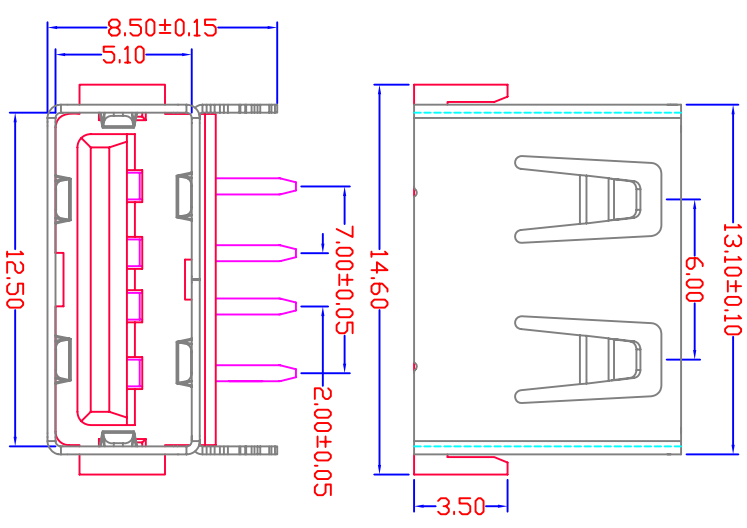
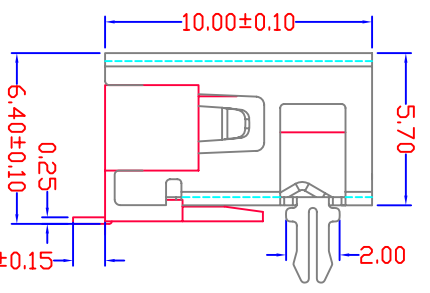


MAPX	MODIFICATION	DATE
------	--------------	------

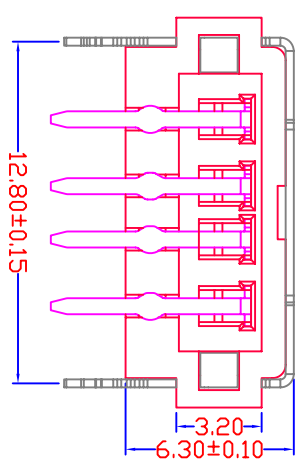

RECOMMENDED P.C.B LAYOUT

- Specification:**
- Electrical Characteristics:**
Dielectric Withstanding Voltage: AC 500V/1MINUTE.
Insulation Resistance: 1000 MΩ/Min.
Contact Resistance: 30 mΩ/ Max.
 - Mechanical Characteristics:**
INSERTION FORCE: 30N(3.06kgf) MAX
EXTRACTION FORCE: 10~30N(1.02~3.06kgf)
Durability:1500cycles.EXTRACTION FORCE:10~30N(1.02~3.06kgf)
 - Material:**
Terminal: Phosphor Bronze, C5191/C2680R-EH T=0.25
Plating: Gold 0.76 um Min plating over 1.27 um Min Nickel underplate, 2.54 um Min Sn selective plating on solder tail;
Shell: Bronze, C2680R-H =0.30mm
Plating: Nickel underplate 2.54 um Min;
Housing: LCP Black
 - Environmental:**
Operating Temperature: 0°C to +85°C.

产品图
PRODUCT CHART DWG

深圳市精拓金电子有限公司

公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	MM	制图 DRAWING	Z-Y-B	制料号 PRODUCT PART NO.	JTJ-USB-A/F-10.0-018
X	±0.30	X	±5°	审核 CHKD		产品名称 PRODUCT NO.	USB A/F 90° 短体前两脚无边
X	±0.25	X	±2°	核准 APPD		角法 VIEW	
XX	±0.15	XX	±1°	日期 DATE	2012041	版本 VER	AD
XXX	±0.10	XXX	±0.5°				

G 1 2 3 4 5 6 7 8 9 10 G

F

E

D

C

B

A