
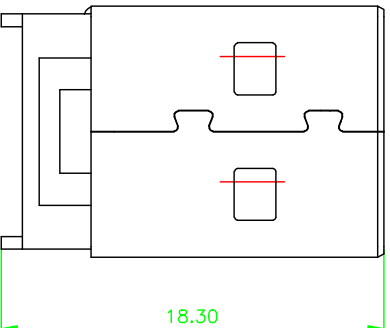

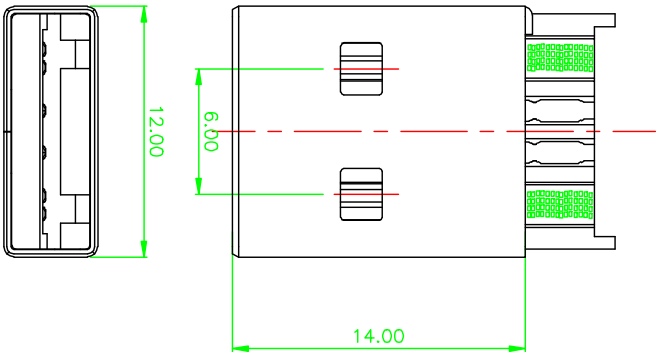


ROHS

REVISIONS		
SYM/ECN No.	MODIFICATION	DATE ISSUED

Note:

1. Material:
  - 1.1, Housing: High temperature thermoplastic with/black g.f, UL94V-0
  - 1.2, Contact: copper alloy, t=0.25mm
  - 1.3, Shell: copper/Ferroalloy alloy, t=0.35mm
2. Specification:
  - 2.1, Current rating: 3A Max.
  - 2.2, Dielectric withstanding voltage: 100 V(ac) for 1 min.
  - 2.3, Contact resistance: 30 mΩ Max.
  - 2.4, Insulation resistance: 100 MΩ Min.
  - 2.5, Total mating force: 3.57 Kgf Max.
  - 2.6, Total unmating force: 1.0 Kgf Min.
3. Finish:
  - 3.1, Contact: Plated Gold in Mating Area; Tin On Solder Tails
  - Shell: Nickel Plating
4. Environmental:
  - 4.1, Temperature range: -55°C~85°C

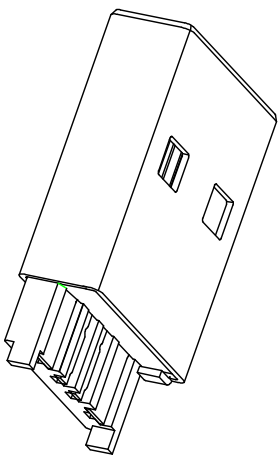

**JD** 深圳市精拓金电子有限公司

DRAWN  
CHECKED  
APPROVED

TITLE

**USB AM 大电流焊线式  
一件式**

PART NO. --

DRAWING NO. --



UNIT  
mm

TOLERANCE  
XXX±10, XX±15, X±25, ANG±1°

SCALE	SHEET	SIZE	REV.
1:1	1 OF 1	A4	X1