




# SS32BF THRU SS320BF

## SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 20 to 200 Volts Forward Current - 3.0 Ampere

### SMBF

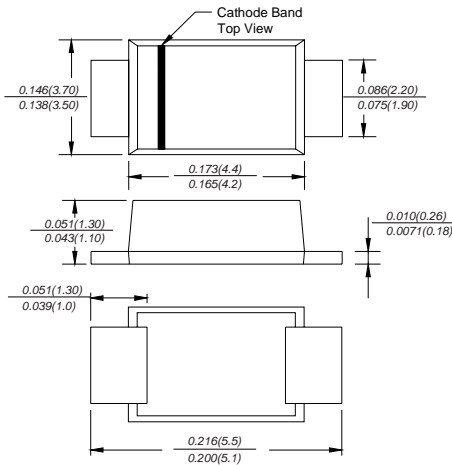

### FEATURES

- ◆ Metal silicon junction, majority carrier conduction
- ◆ For surface mounted applications
- ◆ Low power loss, high efficiency
- ◆ High forward surge current capability
- ◆ For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications

### MECHANICAL DATA

**Case:** JEDEC SMBF molded plastic body  
**Terminals:** leads solderable per MIL-STD-750, Method 2026  
**Mounting Position:** Any  
**Weight:** 57mg/0.002oz

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.  
 Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.


MDD Catalog Number	SYMBOLS	SS32BF	SS34BF	SS36BF	SS38BF	SS310BF	SS315BF	SS320BF	UNITS
Marking code		S32B	S34B	S36B	S38B	S310B	S315B	S320B	
Maximum repetitive peak reverse voltage	$V_{RRM}$	20	40	60	80	100	150	200	VOLTS
Maximum RMS voltage	$V_{RMS}$	14	28	42	56	70	105	140	VOLTS
Maximum DC blocking voltage	$V_{DC}$	20	40	60	80	100	150	200	VOLTS
Maximum average forward rectified current at T <sub>L</sub> (see fig.1)	$I_{(AV)}$	3.0							Amp
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	80.0			70.0				Amps
Maximum instantaneous forward voltage at 3.0A	$V_F$	0.55	0.70	0.85		0.95		Volts	
Maximum DC reverse current at rated DC blocking voltage $T_A=25^{\circ}C$ $T_A=100^{\circ}C$	$I_R$	0.5 5.0			0.3 3.0				mA
Typical junction capacitance (NOTE 1)	$C_J$	450			400				pF
Typical thermal resistance (NOTE 2)	$R_{\theta JA}$	50.0							°C/W
Operating junction temperature range	$T_J$	-50 to +125							°C
Storage temperature range	$T_{STG}$	-50 to +150							°C

**Note:** 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.  
 2. P.C.B. mounted with 0.2x0.2" (5.0x5.0mm) copper pad areas




# RATINGS AND CHARACTERISTIC CURVES SS32BF THRU SS320BF


**Fig.1 Forward Current Derating Curve**

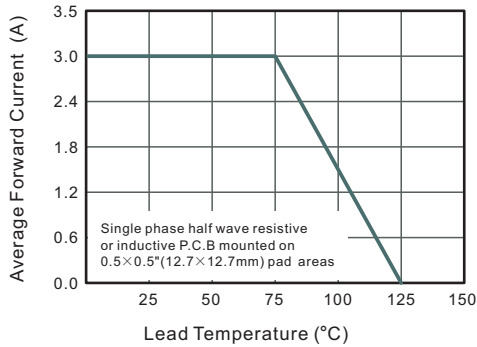


**Fig.2 Typical Reverse Characteristics**

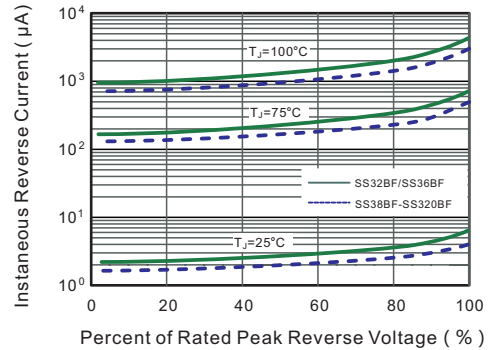


**Fig.3 Typical Forward Characteristic**

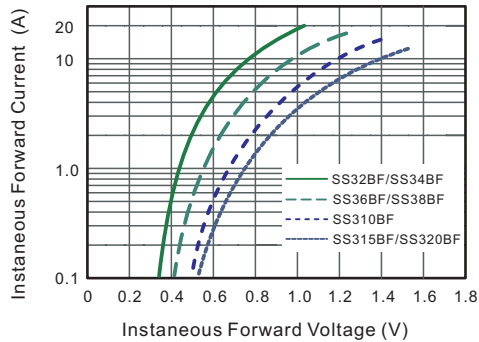


**Fig.4 Typical Junction Capacitance**

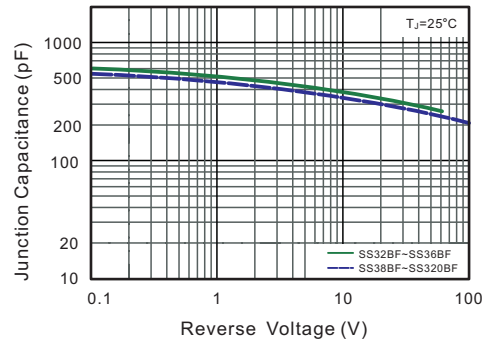

**Fig.5 Maximum Non-Repetitive Peak Forward Surge Current**

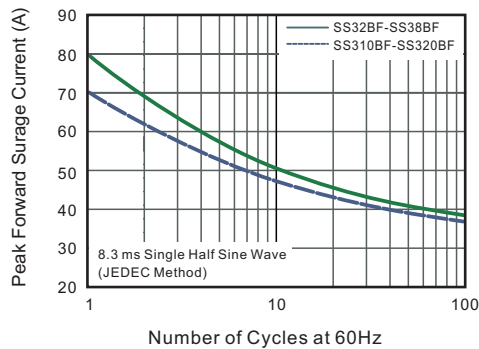

**Fig.6- Typical Transient Thermal Impedance**

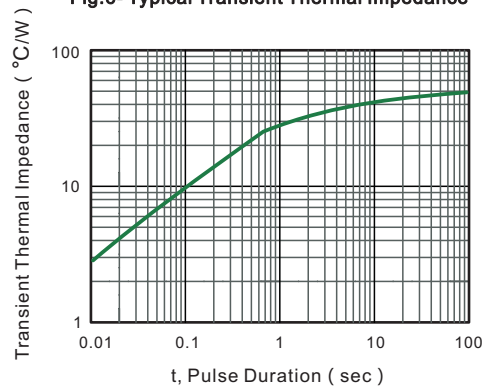

The cruve graph is for reference only, can't be the basis for judgment(曲线图仅供参考)!

