


注: 未经允许禁止传输、复制、编辑该文档, 以及利用其内容进行交流

REV	E.C.N NO.	CONTENT	CHK	DATE

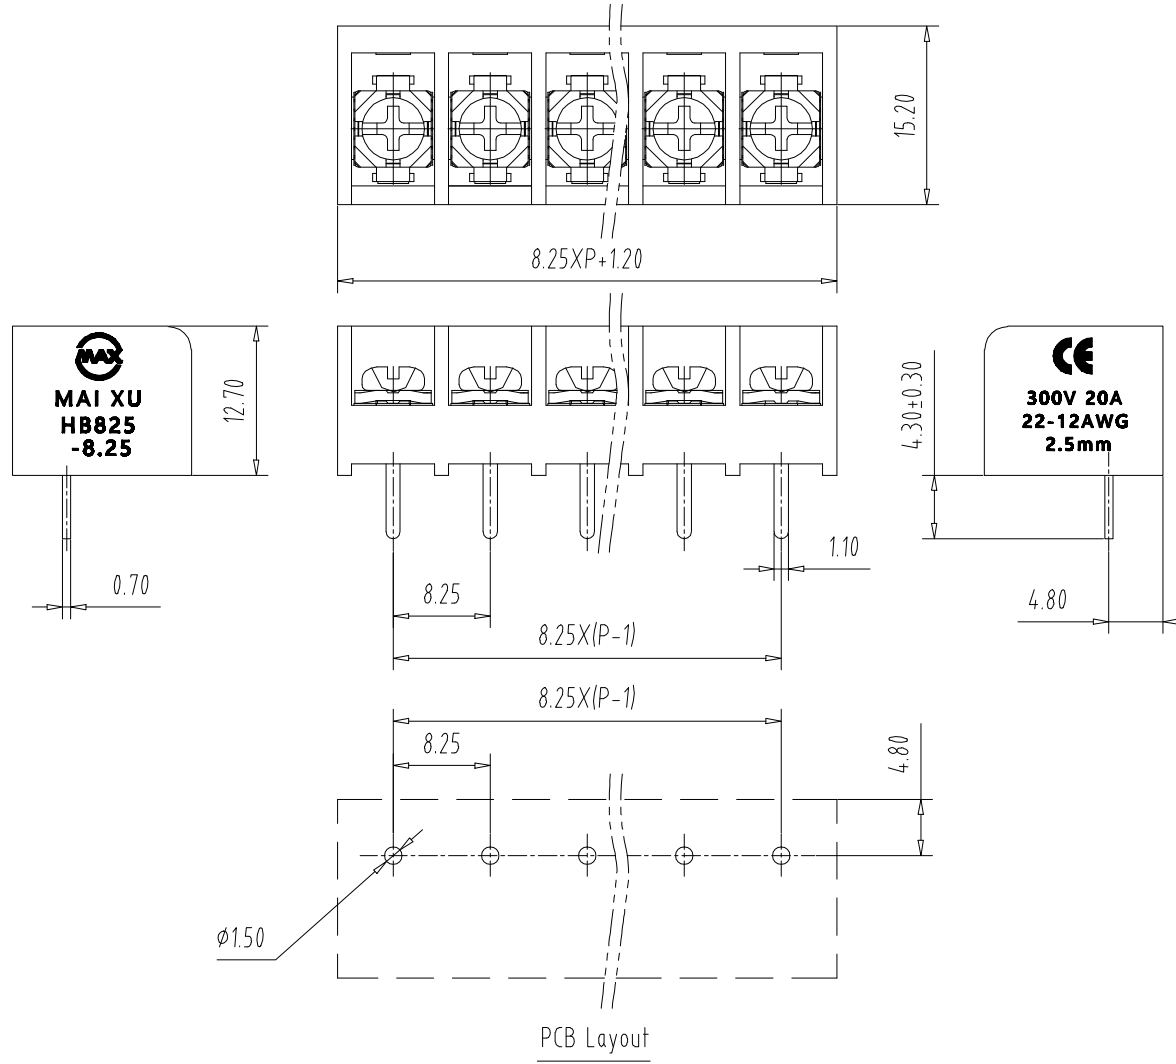

NOTES1:

UL Standard

1. Use group	B	C	D
Rated Current	20A	/	/
Rated Voltage	300V	/	/

2. Torque value: M3, 4.43Lb.in

3. Wire range: 22~12AWG

IEC Standard

1. Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	/	/	/
Rate Voltage(V)	/	450V	/
Rate Current(A)	/	32A	/

2. Torque value: M3, 0.5Nm

3. wire range: 2.5mm²

NOTES2:

1. Housing: PA66(UL94V-0)

2. Solder Pin: Brass(Sn Plated)

3. Screw: Steel(M3, Ni Plated)

NOTES3:

1. Pitch: 8.25mm Poles: 02-24P

2. Operating temperature: -40℃~+105℃

3. RoHS Compliance

How to order

HB825 - 8.25 - XXP
 Factory Code poles

Pitch Range In mm			Nominal Dimension Range In mm					—	∩	□
TO	Over 6	Over 10	TO	Over 30	Over 60	Over 100	Over 150	0.1/10		
6	TO 10	TO 24	TO 30	TO 60	TO 100	TO 150		<		
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°		

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CKK	DATE	22.09.14	UNITS	MM
CHK.		DATE		SCALE	1:1
APP.		DATE			A4
				NAME	HB825-8.25-XXP
				DWGNO.	



CIXI MAIXU ELECTRONICS CO.,LTD.

慈溪迈旭电子有限公司