

注：本板为禁止转输、复制、编辑文件，以及用其内容进行交流

REV	ECN NO.	CONTENT	CHK	DATE

NOTES1:  
UL Standard  
1.Rating voltage/current: 300V/8A  
2.withstanding voltage: AC2000V/1Min  
3.Torque value: M2.0, 1.77Lb.in  
4.Wire range: 28~16AWG

IEC Standard

1. Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	250V
Rate Current(A)	7A

2. Torque value: M2, 0.2Nm  
3.wire range: 0.5~1.5mm<sup>2</sup>





NOTES2:

- 1.Housing: PA66 (UL94V-0)
- 2.Cover: PA66 (UL94V-0)
- 3.Cage: Brass (Ni Plated)
- 4.Clamp: Phosphor Brons (Ni Plated)
- 5.Screw: Steel (M2.0,Zn Plated)

NOTES3:

- 1.Pitch: 3.81mm Poles: 02-24P
- 2.Stripping length: 6-7mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order

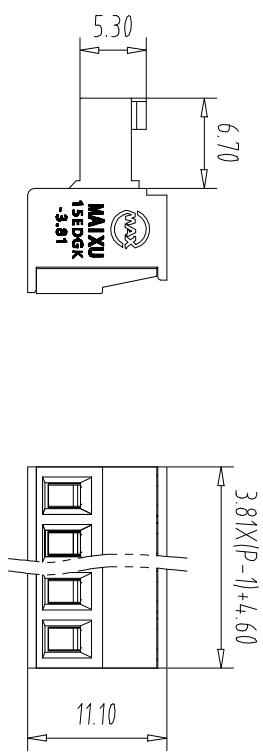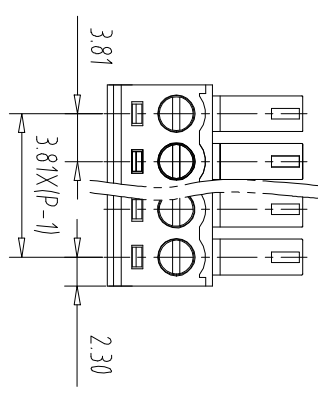

Pitch Range In mm	Nominal Dimension Range In mm						Tolerance	Angle
	Over 6	Over 10	Over 24	Over 30	Over 60	Over 100		
TO 6	TO 10	TO 24	TO 30	TO 60	TO 100	Over 150	0.1/10	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	22.09.14	MM	SHEET/OF 1/1
APP	DATE	SCALE	1:1	A4	1/1
NAME				MX15EDGK-3.81-XXP	
DWGNO.					

**MAXU** CXI MAXU ELECTRONICS CO.,LTD  
慈溪迈旭电子有限公司