

注：本板为禁止运输、复制、扫描文件，以及用其内容进行交流

REV	ECN NO.	CONTENT	CHK	DATE

NOTES1:
UL Standard
1.Rating voltage/current: 300V/8A
2.withstanding voltage: AC2000V/1Min
3.Torque value: M2.0, 1.77Lb.in
4.Wire range: 28~16AWG

IEC Standard

1. Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	250V
Rate Current(A)	7A

2. Torque value: M2, 0.2Nm
3.wire range: 0.5~1.5mm²

NOTES2:



- 1.Housing: PA66 (UL94V-0)
- 2.Cover: PA66 (UL94V-0)
- 3.Cage: Brass (Ni Plated)
- 4.Clamp: Phosphor Brons (Ni Plated)
- 5.Screw 1: Steel (M2.0,Zn Plated)
- 6.Screw 2: Steel (M2.5,Zn Plated)

NOTES3:

- 1.Pitch: 3.81mm Poles: 02-24P
- 2.Stripping length: 6-7mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order

MX15EDGKM - 381 - XXP
Factory poles
Code

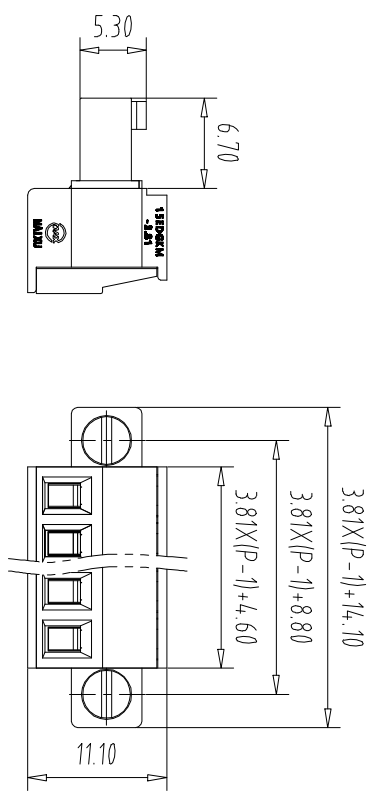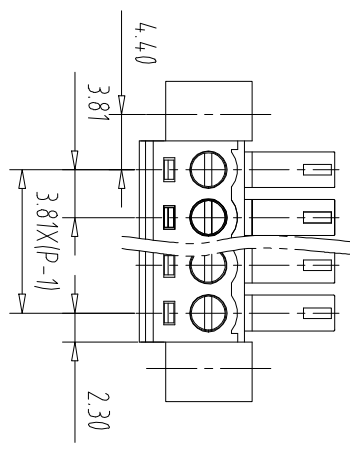

Pitch Range In mm	Nominal Dimension In mm	Range
Over 6 TO	Over 10 TO	Over 30 TO
Over 10 TO	Over 24 TO	Over 60 TO
Over 15 TO	Over 30 TO	Over 100 TO
Over 20 TO	Over 30 TO	Over 150 TO

±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°
-------	-------	-------	-------	-------	-------	-------	-------	-----

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	SCALE	SHEET/OF	1/1
APP	DATE	SCALE	1:1	A4	⊕
CIXI MAIXU ELECTRONICS CO.,LTD			MX15EDGKM-3.81-XXP		
慈溪迈旭电子有限公司			DWGNO.		