
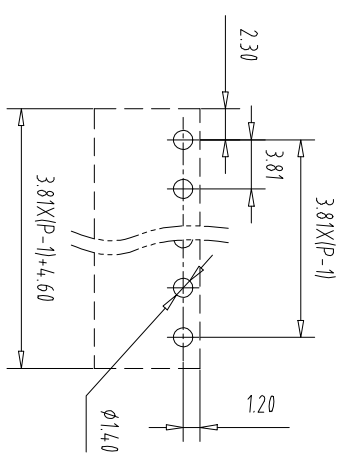

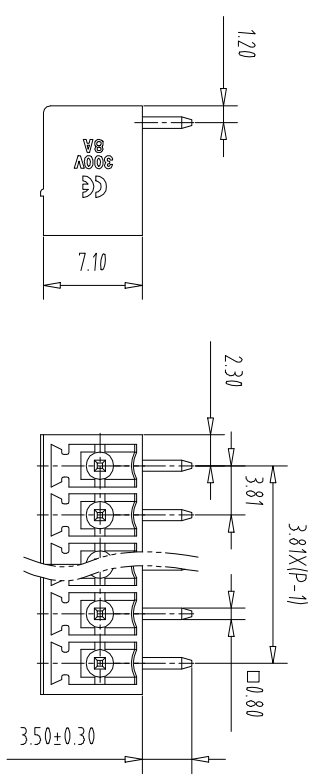


注: 本板为禁止传输、复制、编辑、修改、以及用其内容进行交流

REV	ECN NO.	CONTENT	CHK	DATE
-----	---------	---------	-----	------

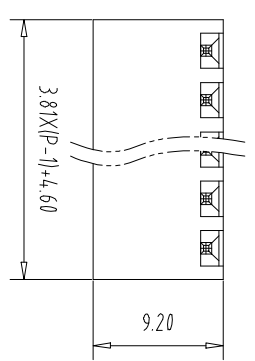

PCB Layout

NOTES1:
 UL Standard
 1.Rating voltage/current: 300V/8A
 2.withstanding voltage: AC2000V/1Min
 IEC Standard

1. Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	250V
Rate Current(A)	7A

NOTES2:
 1.Housing: PA66 (UL94V-0)
 2.Solder Pin: Brass (Sn Plated)

NOTES3:
 1.Pitch: 3.81mm Poles: 02-24P
 2.Operating temperature: -40°C~+105°C
 3.RoHS Compliance

How to order
 MX15EDGR - 381 - XXP
 Factory Code | poles

Pitch Range In mm	Nominal Dimension In mm	Range					
Over 6	Over 10	Over 30	Over 60	Over 100	Over 150	0.1/10	
TO 6	TO 10	TO 30	TO 60	TO 100	TO 150	∠	
±0.15	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	
						±2°	

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	UNITS	MM	SHEET/OF 1/1
APP	DATE	SCALE	1:1	A4	⊕
NAME				MX15EDGR-381-XXP	
DWGNO.					

MAI XU
 CIXI MAIXU ELECTRONICS CO.,LTD
 慈溪迈旭电子有限公司