

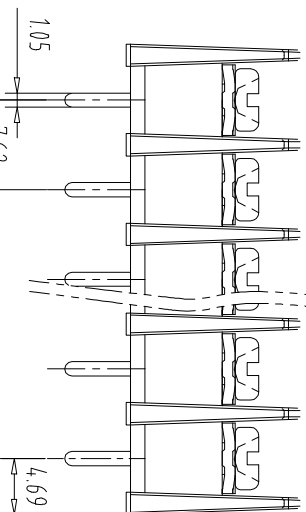



注：本板为禁止运输、复制、编辑文件，以及利用其内容进行交流

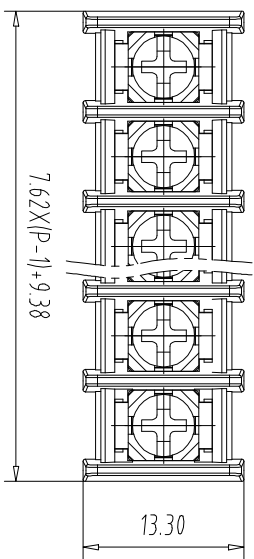

NOTES1:
UL Standard

1 Use group	B	C	D
Rated Current	15A	15A	10A
Rated Voltage	300V	300V	300V

- 2 Torque value: M3, 4.43Lb.in
3 Wire range: 22~12AWG
IEC Standard

1 Pollution Degree	3	2	2
Overvoltage Category	///	///	///
Rate Impulse Voltage(kV)	/	/	/
Rate Voltage(V)	400V	1000V	1000V
Rate Current(A)	24A	24A	18A

- 2 Torque value: M3, 0.5Nm
3 wire range: 2.5mm²


- NOTES2:
1 Housing: PA66(UL94V-0)
2 Solder Pin: Brass(Sn Plated)
3 Screw: Steel(M3,Ni Plated)

- NOTES3:
1 Pitch: 7.62mm Poles: 02-24P
2 Operating temperature: -40℃~+105℃
3 RoHS Compliance

How to order

MX25C - 7.62 - XXP
Factory poles
Code

PCB Layout

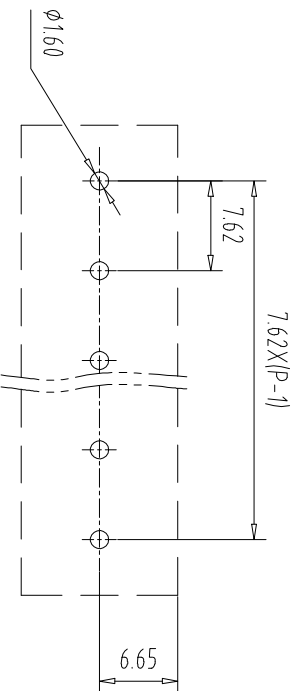

Pitch Range	In mm	Nominal Dimension	In mm	Range
Over 6	Over 10	Over 30	Over 60	Over 100
TO 6	TO 10	TO 24	TO 30	TO 60
±0.15	±0.20	±0.30	±0.50	±0.70 ±1.00 ±1.30

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	DATE	UNITS	MM
APP	DATE	SCALE	SCALE	SHEET/OF	A4
				NAME	
				NAME	



CIXI MAIXU ELECTRONICS CO.,LTD
慈溪迈旭电子有限公司

DWGNO.