
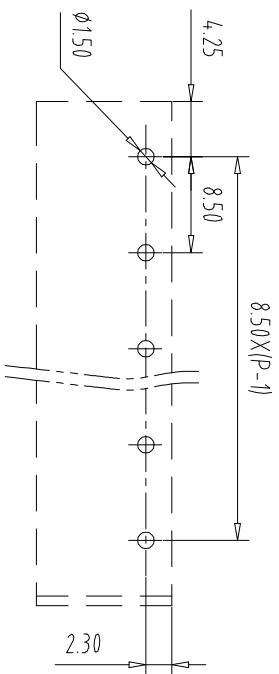
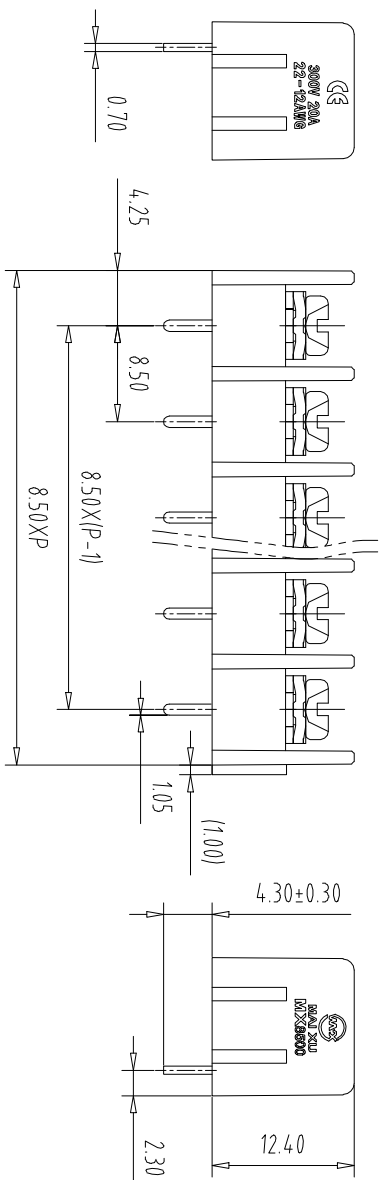


注：本板为禁止传输、复制、编辑、修改、以及用其内容进行复制

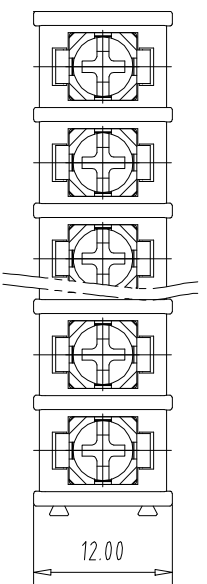

PCB Layout

REV	ECN NO.	CONTENT	CHK	DATE

NOTES1:

UL Standard

- 1.Rating voltage/current: 300V/20A
- 2.withstanding voltage: AC2500V/1min
- 3.Torque value: M3, 4.43Lb.in
- 4.Wire range: 22~12AWG

IEC Standard

- 1.Rating voltage/current: 450V/24A
- 2.Torque value: M3, 0.5Nm
- 3.wire range: 2.5mm²

NOTES2:

- 1.Housing: PA66(UL 94V-0)
- 2.Screw: Steel(M3,Ni Plated)
- 3.Solder Pin: Brass(Sn Plated)

NOTES3:

- 1.Pitch: 8.50mm Poles: 02-24P
- 2.Operating temperature: -40°C~+105°C
- 3.RoHS Compliance

How to order

MX8500 - 85 - XXP
 Factory poles
 Code

Pitch Range	In mm	Nominal Dimension	In mm	Range
Over 6	Over 10	Over 30	Over 60	Over 100
TO 6	TO 10	TO 30	TO 60	TO 100
±0.15	±0.20	±0.30	±0.50	±0.70
±0.20	±0.30	±0.50	±0.70	±1.00
±0.30	±0.50	±0.70	±1.00	±1.30

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	UNITS	MM	SHEET/OF
APP	DATE	SCALE	1:1	A4	1/1
CIXI MAIXU ELECTRONICS CO.,LTD			NAME		
慈溪迈旭电子有限公司			MX8500-8.5-XXP		
DWGNO.					