



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	H3	REVISED PER ECN-22-150900	22APR2022	RK	CSD

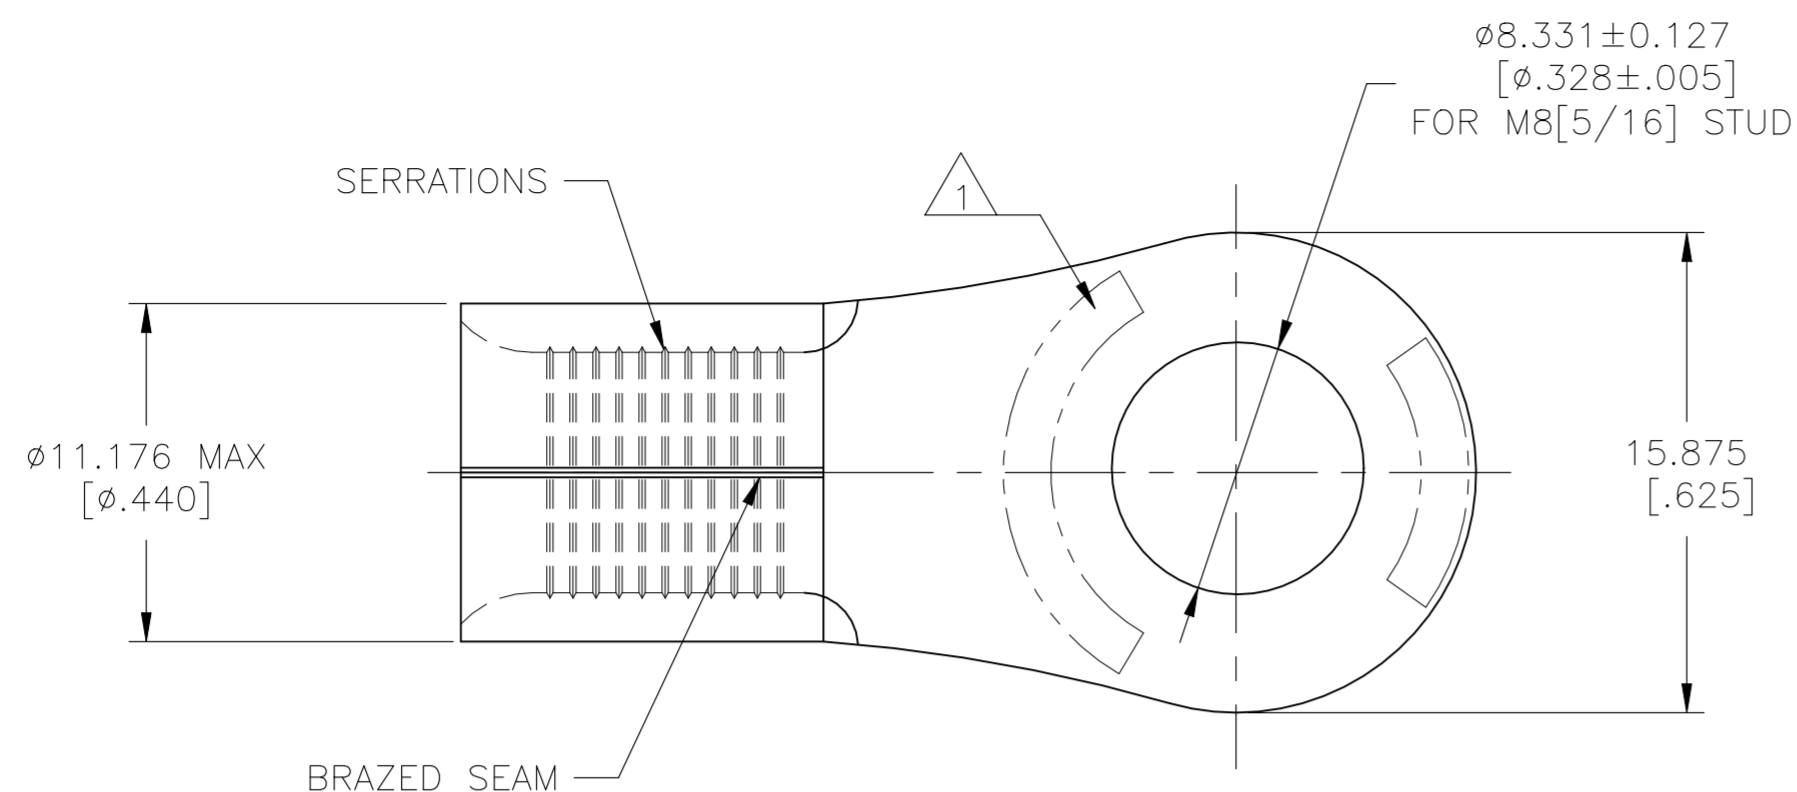

AMP WIRE RANGE	Listed
4 AWG SOLID OR STRANDED	4 AWG STRANDED

LR7189 Certified
4 AWG SOLID OR STRANDED

- STAMP AMP 4W* 40-50
LOCATED APPROX AS SHOWN
- UL 486 A-B

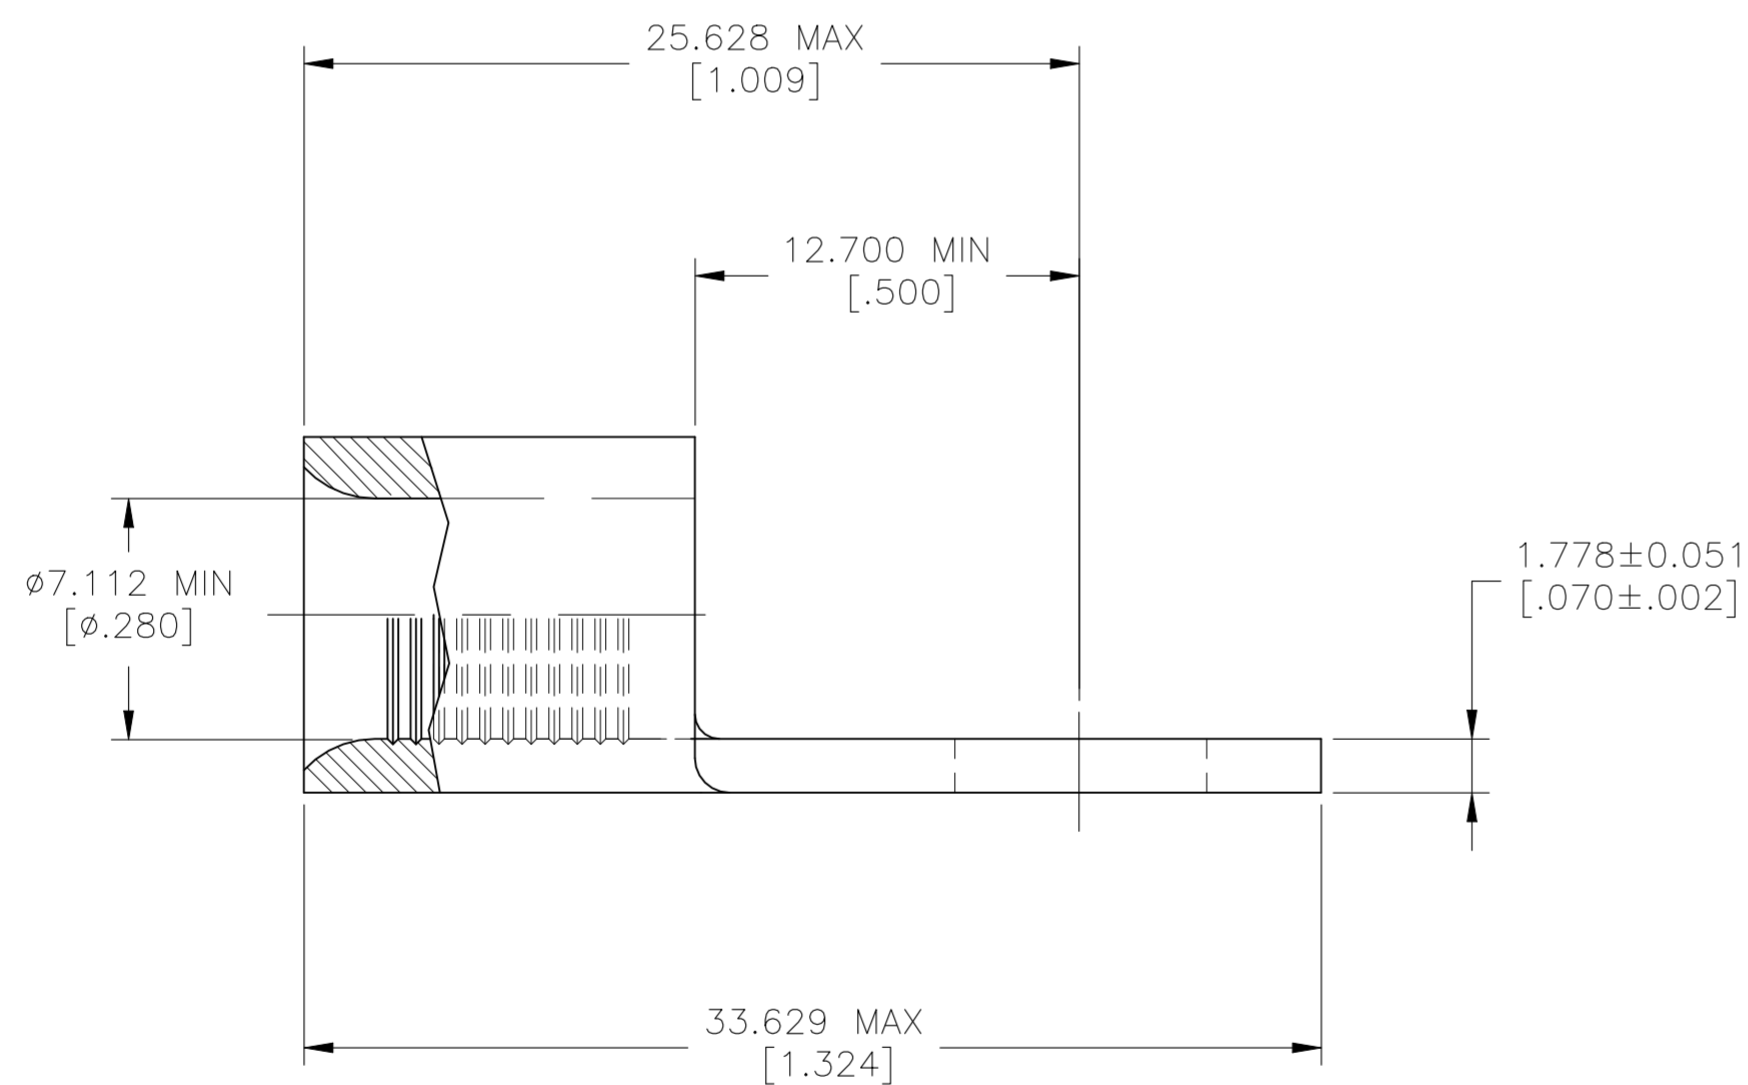

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 170° C[338°F] MAX
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: NOT APPLICABLE
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	WIRE CROSS SECTIONAL AREA RANGE: 16.8-26.7MM ² [33,100-52,600] CIR MILS SOLID OR STRANDED
FOR ORDER ENTRY	1-800-526-5142	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TA BRINKMAN 3-29-93
DIMENSIONS: mm [INCHES]		CHK DA PATTERSON 3-29-93
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD DE MILLER 3-29-93
0 PLC ± -		PRODUCT SPEC
1 PLC ± -		APPLICATION SPEC
2 PLC ± -		WEIGHT
3 PLC ± 0.127[.005]		
4 PLC ± -		
ANGLES ± -		
MATERIAL COPPER PER ASTM B-152 ANNEALED	FINISH TIN PLATE 0.00254[.000100] MIN THK PER ASTM B545	

100	LOOSE PIECE	33115
QTY	PACKAGE TYPE	PART NUMBER
TE TE Connectivity		
NAME TERMINAL, RING, TONGUE, SOLISTRAND™ 4 AWG		
SIZE A2	CAGE CODE 00779	DRAWING NO C-33115
RESTRICTED TO	SCALE 4:1	SHEET 1 OF 1
	REV H3	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[33115](#)