


Main technical performance


主要技术性能

1. Rated electric load: 30V 0.5A  
额定电负荷: 30V 0.5A;
2. Contact resistance: < 0.03 Ω  
接触电阻: < 0.03 Ω;
3. Insulation resistance: ≥ 100m Ω  
绝缘电阻: ≥ 100MΩ;
4. Withstand voltage: Ac500V (50Hz) / min  
耐压: AC500V (50Hz)/min;
5. Plugging force: 3~20N  
插拔力: 3~20N;
6. Service life: 5000 times  
寿命: 5,000次。

电路原理图



线路板开孔尺寸

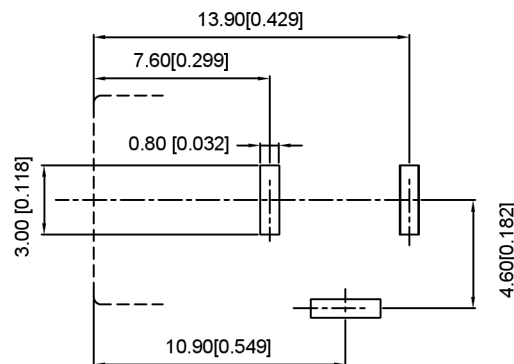

6	Bending piece	1	Brass	tin
5	Pin	1	Brass	tin
4	back cover	1	PBT	black
3	Plain film	1	Brass	tin
2	reed	1	SUS	tin
1	Pedestal	1	PBT	black
NO	Name	PCS	Material Science	Rema

DSND		SCALE: N/A	MODEL TYPE:
DWN		VIEW:	PART NO.: DC-005A-2.5A-2.5
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	
			WEIGHT
			SHEET
			REVISIC
			1/1
			A0



XKB INDUSTRIAL PRECISION CO., LIMITED

广东星坤科技股份有限公司

Δx		日期
Δx		日期
Δx		日期
MARK		

文件工程章

							ANGLAR	±5°
							L ≤ 4	±0.2
							4 < L ≤ 16	±0.3
							16 < L ≤ 63	±0.4
							L > 63	±0.5
								UNSPECIFIED TOLERANCES

www.helloxkb.com www.helloxkb.cn www.xk-dg.cn