

Technical characteristics:

技术特性:

Service conditions: - 30 ~ 70 °

使用条件:-30℃~70℃

Rated load: dc30v 0.5A

额定负荷:DC30V 0.5A

Contact resistance: ≤ 0.03 Ω

接触电阻:≤0.03Ω

Insulation resistance: ≥ 100m Ω dc250v

绝缘电阻:≥100MΩ DC250V

Withstand voltage: ac50ov (50Hz) / min



耐压:AC50OV(50Hz)/min

Plugging force: 3 ~ 20n


插拔力:3~20N

Service life: 5000 times

寿命:5000次

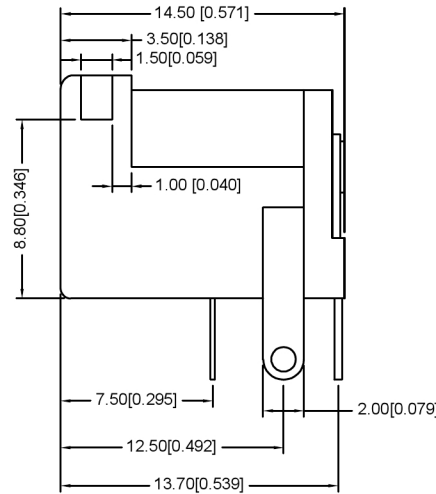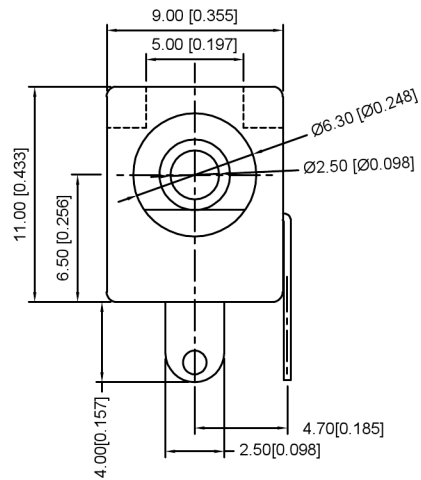

P.C.B LAYOUT VIEW

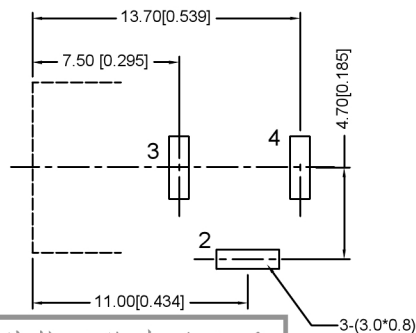

SCHEMATIC	
Model	DC-005B-2.5A
Center Pin	Ø1.65 mm
	Ø2.0 mm
	Ø2.5 mm

	MATERIAL	PLATING
center pin	Brass	Sn
terminal 1	Brass	Sn
terminal 2	Sus	Sn
terminal 3	Brass	Sn
plastic	PA66	

广东星坤科技股份有限公司

ΔX	日期
ΔX	日期
ΔX	日期
MARK	DESCRIPTION

文件工程章

REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
				ANGULAR ±5°
				L ≤ 4 ±0.2
				4 < L ≤ 16 ±0.3
				16 < L ≤ 63 ±0.4
				L > 63 ±0.5



DSND		SCALE: N/A	MODEL TYPE:
DWN		VIEW:	PART NO.: DC-005B-2.5A-2.5
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	
XKB INDUSTRIAL PRECISION CO., LIMITED			WEIGHT
			SHEET 1/1
			REVISIC A0