




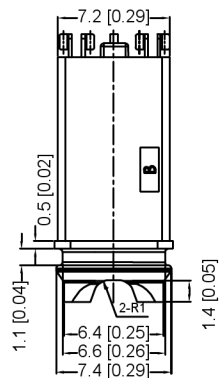



ROHS COMPLIED



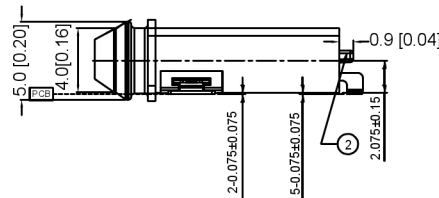


SPECIFICATIONS:

1. INSULATION RESISTANCE: VOLTAGE OF 500V D.C. SHALL BE APPLIED TO THE TERMINALS AFTER WHICH MEASUREMENT SHALL BE MADE. A GAUGE FOR THE MEASUREMENT SHALL BE USED THE INSULATED GAUGE
2. CONTACT RESISTANCE: 30mA IR LESS
3. VOLTAGE PROOF: 500V AC FOR ONE MINUTE
4. DURABILITY: 10000 INSERTION/REMOVAL CYCLES (MINIMUM)
5. INSERTION FORCE: 0.4KGF-2.0KGF
6. WITHDRAWAL FORCE: 0.4KGF-2.0KGF
7. WATER PROOFNESS: THIS PRODUCT IS CONFIRM TO JIS STANDARD IPX7 BY WATERPROOF JACK
8. USING PLUG: 43.5MM, 4-PILE STEREO EARPHONE (L/CH/RCH/GND/MIC) PROVIDED THAT THEY CONFIRM TO JIS C6560
9. 1VAL RING
- 9-1. Hardness of silicone rudder: 70°



SEC-B-B
Image of plug match with contact point

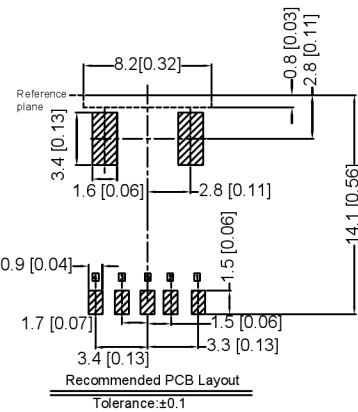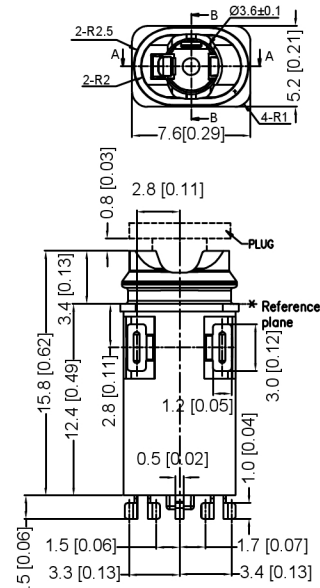

SEC-A-A
Image of plug match with contact point

ITEM	PART NAME	TERMINAL	QTY	MATERIAL
⑩	OVAL RING	----	1	SILICONE
⑨	BOND	----	1	----
⑧	TERMINAL	----	2	C2680 t=0.2
⑦	TIP SPRING-2	⑤	1	Ti-Cut=0.2
⑥	RING SPRING-2	④	1	Ti-Cut=0.2
⑤	RING SPRING-1	③	1	Ti-Cut=0.2
④	TIP SPRING-1	②	1	Ti-Cut=0.2
③	EARTH SPRING	①	1	Ti-Cut=0.2
②	COVER	----	1	PA9T(BLACK)
①	HOUSING	----	1	PA9T(BLACK)

广东星坤科技股份有限公司

日期
文件工程章

REVISIONS

NO.	DESCRIPTION	DATE	REVISED	APPROVED

ANGLAR	±5°
L ≤ 4	±0.2
4 < L ≤ 16	±0.3
16 < L ≤ 63	±0.4
L > 63	±0.5
UNSPECIFIED TOLERANCES	



DSND	SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK
DWN	VIEW:	PART NO.: PJ-3255A
CHKD	UNIT: mm/in	DWG NO.:
APPD	SIZE: A4	WEIGHT
XKB INDUSTRIAL PRECISION CO., LIMITED		SHEET 1/1
		REVISIC A0