


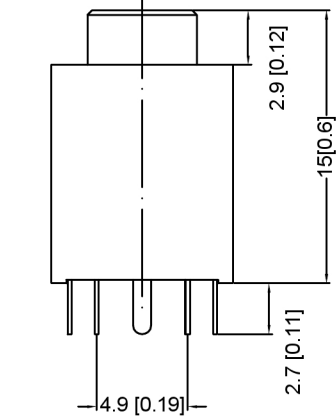
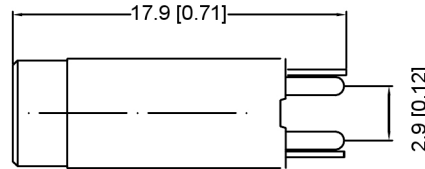


Temperature -20~70C  
 Rated Load DC30V 0.3A  
 Contact Resistance <0.03  
 Insulation Resistance >100M  
 Withstand Voltage AC500V(50Hz)/min  
 Actuating Force 2.2~30N  
 Life 3000N



PIN	PJ-359H-X
Schematic	<p>B:Black W:White</p>

	MATERIAL	PLATING
termina 1	Phosphor Bronze	ag
termina 2	Phosphor Bronze	ag
termina 3	Phosphor Bronze	ag
termina 4	Phosphor Bronze	ag
terminal 5	Phosphor Bronze	ag
terminal 6	Phosphor Bronze	ag
Plastic	PA66	
Plastic	Pom	
base	PBT	

广东星坤科技股份有限公司

日期  
 文件工程章

文件工程章

REVISIONS	DATE	REVISED	APPROVED	DESCRIPTION
ANGLAR				±5°
L ≤ 4				±0.2
4 < L ≤ 16				±0.3
16 < L ≤ 63				±0.4
L > 63				±0.5
UNSPECIFIED TOLERANCES				



DSND		SCALE: N/A
DWN		VIEW:
CHKD		UNIT: mm/in
APPD		SIZE: A4

MODEL TYPE:	3.5 PHONE JACK	
PART NO.:	PJ-359	
DWG NO.:		
WEIGHT	SHEET	REVISIC
	1/1	A0

XKB INDUSTRIAL PRECISION CO., LIMITED

www.helloxkb.com www.helloxkb.cn www.xk-dg.cn