

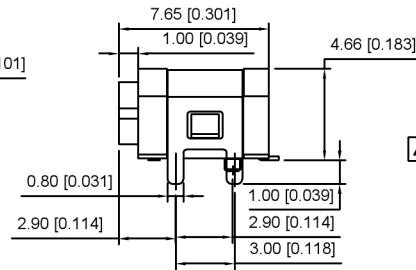


RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

NOTES:

SPECIFICATION 规格:

1. CURRENT RATING 额定电流: 3.0A MAX
2. VOLTAGE 电压: 100 VAC
3. TEMPERATURE RANGE 温度范围: -30 °C ~ 85 °C
4. CONTACT RESISTANCE 接触电阻: 40 MILLIONHM MAX
5. INSULATION RESISTANCE 绝缘电阻: 100 MEGOHMS MIN.
6. INSERTION FORCE 插入力: 5N~20N
7. UNMATING FORCE 拔出力: 8N~20N
8. DURABILITY 工作寿命: 10,000 CYCLES
9. WATER PROOFNESS 防水: THIS PRODUCT IS BASED ON IPX7.



U262-06XN-4BFC10

- 1:0.8u"
- 2:5u"
- 3:10u"
- W:WHITE
- B:BLACK
- 1:PBT
- 2:PA6T
- 3:PA9T
- 4:LCP

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
6	防水圈	硅胶	BLACK	1PCS
5	SHELL	STAINLESS STEEL	NI Plated	1PCS
4	SHIELDING PLATE	STAINLESS STEEL	NI Plated	1PCS
3	CONTACT	COPPER ALLOY	TIN/Au/Ni Plated	1SET
2	SHELL HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS



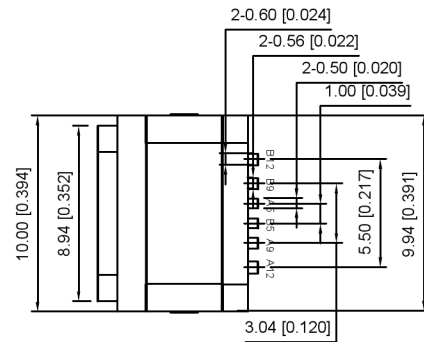


TABLE: ②

料号	Color 颜色
XKQ-442-DR	Red 红色

广东星坤科技股份有限公司

MARK	DESCRIPTION	DATE	REVISED	APPROVED
Δx				
Δx				
Δx				

文件工程章

REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
ANGLAR				±5°
L ≤ 4				±0.2
4 < L ≤ 16				±0.3
16 < L ≤ 63				±0.4
L > 63				±0.5



DSND	SCALE: N/A	MODEL TYPE: 3.1 TYPE C
DWN	VIEW: ④	PART NO.: XKQ-442-DR
CHKD	UNIT: mm/in	DWG NO.: U262-06XN-4BFC10
APPD	SIZE: A4	WEIGHT
		SHEET 1/1
		REVISIO A0

XKB INDUSTRIAL PRECISION CO., LIMITED