

XKB Connectivity

备注 NOTES:

1.材质 Material:

- 1.1胶芯 Plastic core: LCP+30%G.F
- 1.2端子 Terminal: C18140, T=0.15mm; Nickel base,gold plated
- 1.3外壳 shell: SUS, T=0.30mm; Nickel plated on the surface
- 1.4卡片 shell fragment: SUS, T=0.15mm;



2.电气特性 ELECTRICAL CHARACTERISTIC:

- 2.1额定电流 Rated current: 3A
- 2.2接触阻抗 Contact resistance: 40mΩ MAX
- 2.3绝缘阻抗 Insulation resistance: 100MΩ MIN 250V DC
- 2.4耐压 WITHSTANDING VOLTAGE: 100V AC
- 2.5沾锡性: 温度245±5℃, 时间5±0.5s
- 2.6插入力 INSERTION FORCE: 2.0kgf MAX
拔出力 EXTRACTION FORCE:0.6kgf MIN
- 2.7使用寿命 Service life: 5000次
- 2.8工作温度 Operating temperature: -25℃~+80℃

XKB Connectivity

PIN ASSIGNMENT:

Pin No.	Signal Name	Pin No.	Signal Name
A1	GND	B12	GND
A2		B11	
A3		B10	
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	D+	B7	D-
A7	D-	B6	D+
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10		B3	
A11		B2	
A12	GND	B1	GND

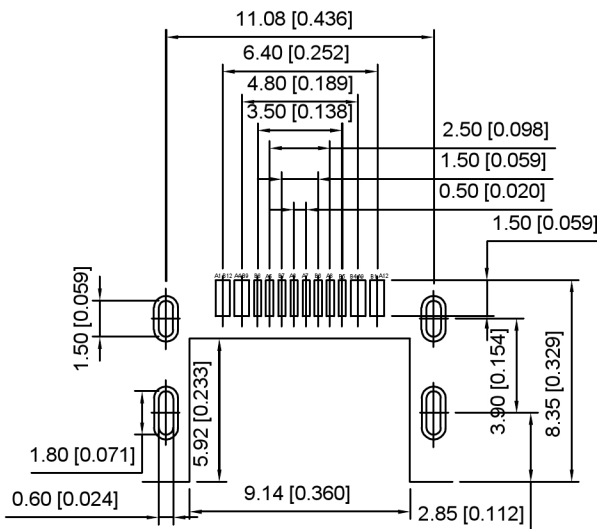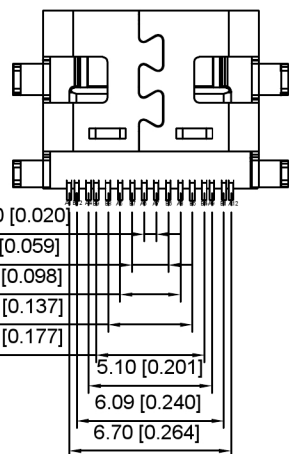

XKB Connectivity

U262-16XN-4BCS73-08T

- 1 Au 1U"
- 2 Au 5U"
- 3 Au 10U"
- 4 Au 3U"
- 6 Au 30U"
- 1 PBT
- 2 PA6T
- 3 PA8T
- 4 LCP

RECOMMENDED P.C.B LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

XKB Connectivity

广东星坤科技股份有限公司

ΔX		日期
ΔX		日期
ΔX		日期
MARK		

文件工程章

REVISIONS	DATE	REVISED	APPROVED	DESCRIPTION
UNSPECIFIED TOLERANCES				

www.helloxkb.com www.helloxkb.cn www.xk-dg.cn

DSND		SCALE: N/A	MODEL TYPE: Type-C 3.1
DWN		VIEW:	PART NO.:
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	U262-16XN-4BCS73-08T
XKB INDUSTRIAL PRECISION CO.,LIMITED			WEIGHT
			SHEET
			REVISIO
			1/1
			A0

