

RECOMMENDED P.C.B LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

SPECIFICATION:

1. Material

Housing Material:High temperature thermoplastic
Contact Terminal:High Grade Copper Alloy
Merallic Shell:Stainless Steel
Inner Ground Cover Shell:Stainless Steel
Mid Plate:Stainless Steel

2. Mechanical:

2.1.Mating force:5-20Nf;
2.2.Unmating force:Initial:8-20Nf;Final:6-20Nf;
2.3.Durability:5000 Cycles;

3. Electrical:


3.1.Current Rating:3A
3.2.Voltage Rating:20V Max. ;
3.3.Dielectric Withstanding
volage:100Vac,60S,10mA;
3.4.Contact resistance:40m Ohms Max. ;
3.5.Insulation Resistance:100M Ohms Min. ;

4.Environmental:

4.1.Operating temperature:-40°C~+85°C;
4.2.Salt Spray Test:24H Min.(No oxidation or rust);

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

U262-16XN-4BS1735

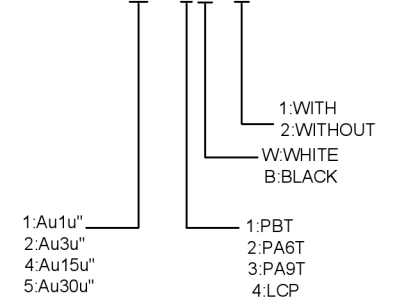

广东星坤科技股份有限公司

文件工程章

DATE	REVISED	APPROVED	ANGLAR	±5°
			L ≤ 4	±0.2
			4 < L ≤ 16	±0.3
			16 < L ≤ 63	±0.4
			L > 63	±0.5
UNSPECIFIED TOLERANCES				
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn				

XKB

XKB INDUSTRIAL PRECISION CO.,LIMITED

DSND	SCALE: N/A	MODEL TYPE:	Type-C 3.1
DWN	VIEW:	PART NO.:	
CHKD	UNIT: mm/in	DWG NO.:	U262-16XN-4BS1735
APPD	SIZE: A4	WEIGHT	SHEET
			1/1
		REVISION	A0