

备注 NOTES:



1. 材质 Material:

- 1.1 胶芯 Plastic core: PA9T+30%G.F
- 1.2 端子 Terminal: C18140, T=0.15mm; Nickel base, gold plated
- 1.3 外壳 shell: SUS, T=0.30mm; Nickel plated on the surface
- 1.4 卡片 shell fragment: SUS, T=0.15mm;

2. 电气特性 ELECTRICAL CHARACTERISTIC :

- 2.1 额定电流 Rated current: 5A
- 2.2 接触阻抗 Contact resistance: 40mΩ MAX
- 2.3 绝缘阻抗 Insulation resistance: 100MΩ MIN 250V DC
- 2.4 耐压 WITHSTANDING VOLTAGE: 100V AC
- 2.5 沾锡性: 温度245±5℃, 时间5±0.5s
- 2.6 插入力 INSERTION FORCE: 2.0kgf MAX
拔出力 EXTRACTION FORCE: 0.6kgf MIN
- 2.7 使用寿命 Service life: 10,000次
- 2.8 工作温度 Operating temperature: -40℃~+80℃

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

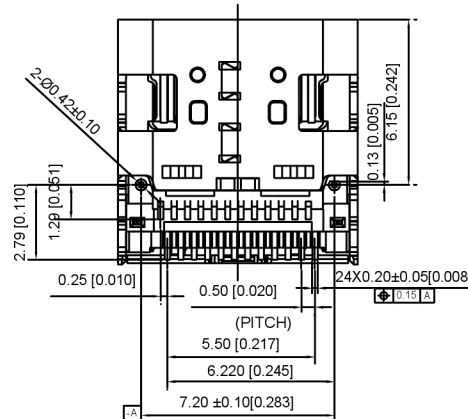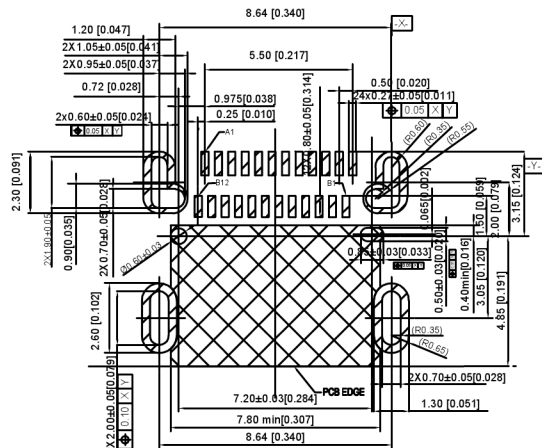

U262-24XN-3BVC82

- 1: AU 1U" Min
- 3: AU 3U" Min
- 5: AU 5U" Min
- 10: AU 10U" Min
- 15: AU 15U" Min
- 30: AU 30U" Min

- 1: PBT
- 2: PA6T
- 3: PA9T
- 4: LCP
- W: WHITE
- B: BLACK

广东星坤科技股份有限公司

Δx	日期
Δx	日期
Δx	日期
MARK	DESCRIPTION

文件工程章

REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
ANGULAR				±5°
L ≤ 4				±0.2
4 < L ≤ 16				±0.3
16 < L ≤ 63				±0.4
L > 63				±0.5



DSND	SCALE: N/A	MODEL TYPE: Type-C 3.1
DWN	VIEW:	PART NO.:
CHKD	UNIT: mm/in	DWG NO.: U262-24XN-3BVC82
APPD	SIZE: A4	WEIGHT
		SHEET 1/1
		REVISIO A0

XKB INDUSTRIAL PRECISION CO., LIMITED