

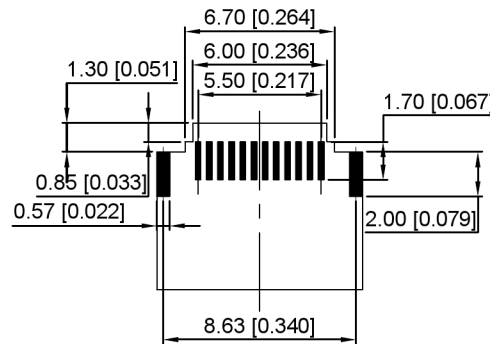
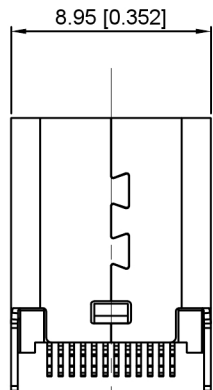

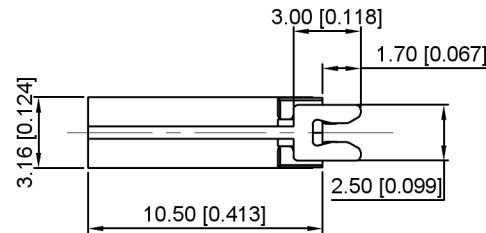


SPECIFICATION:

1. Material
 - Housing Material:High temperature thermoplastic
 - Contact Terminal:High Grade Copper Alloy
 - Metallic Shell:Stainless Steel
 - Inner Ground Cover Shell:Stainless Steel
 - Mid Plate:Stainless Steel
2. Mechanical:
 - 2.1.Mating force:5-20Nf;
 - 2.2.Unmating force:Initial:8-20Nf;Final:6-20Nf;
 - 2.3.Durability:10000 Cycles;
- 3.Electrical:
 - 3.1.Current Rating:3A
 - 3.2.Voltage Rating:20V Max.;
 - 3.3.Dielectric Withstanding volage:100Vac,60S,10mA;
 - 3.4.Contact resistance:40m Ohms Max.;
 - 3.5.Insulation Resistance:100M Ohms Min.;
- 4.Environmental:
 - 4.1.Operating temperature:-30°C~+80°C;
 - 4.2.Salt Spray Test:24H Min.(No oxidation or rust);



U262-24XN-4BJ2105

- 1:WITH
- 2:WITHOUT
- W:WHITE
- B:BLACK
- 1: Au1u"
- 2: Au3u"
- 4: Au15u"
- 5: Au30u"
- 1:PBT
- 2:PA6T
- 3:PA9T
- 4:LCP

RECOMMENDED P.C.B LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

广东星坤科技股份有限公司

Δx	日期
Δx	日期
Δx	日期
MARK	DESCRIPTION

文件工程章

REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
ANGLAR				±5°
L ≤ 4				±0.2
4 < L ≤ 16				±0.3
16 < L ≤ 63				±0.4
L > 63				±0.5

DSND	SCALE: N/A	MODEL TYPE: Type-C 3.1
DWN	VIEW:	PART NO.:
CHKD	UNIT: mm/in	DWG NO.: U262-24XN-4BJ2105
APPD	SIZE: A4	WEIGHT SHEET REVISION
XKB INDUSTRIAL PRECISION CO., LIMITED		1/1 A0