


WITHOUT COVER








WITH COVER

- 1.Contact Resistance:40mOHM Max.;
- 2.Dielectric Withstanding Voltage:100V AC For 1 Minute
- 3.Insulation Resistance:100M OHM Min.;
- 4.Mating And Unmating Force:  
Mating Force:5~20N  
Unmating Force:8~20N;  
6~20N AFTER TEST:
- 5.Durability:10000 Cycles;

### U263-24XN-4BQC16

Mating Area plating  
 01: Au 1u"Min.  
 03: Au 3u"Min.  
 05: Au 5u"Min.  
 10: Au 10u"Min.  
 15: Au 15u"Min.  
 30: Au 30u"Min.

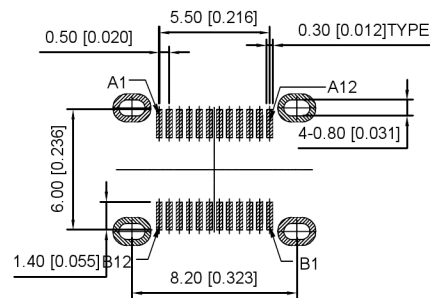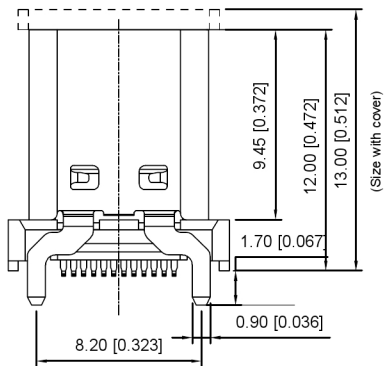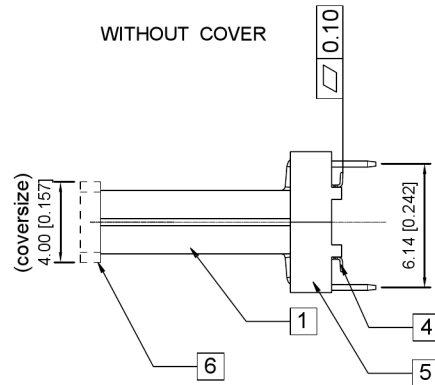

RECOMMEND P.C.B LAYOUT (COMPONENT SIDE)  
 TOLERANCE FOR PCB LAYOUT IS ±0.05  
 KEEP OUT AREA

Item	Title	Material	Dispose	Q'TY
1	Shell	SUS304	Ni:30u" Min.	1PCS
2	GND Plate	SUS301		2PCS
3	Mid Plate	SUS301		1PCS
4	Contact	C7025	Mating Area:See P/N Solder Tails:Matt Tin	2PCS
5	InsertMolding	LCP E6808	UL 94V-0 Black	1PCS
6	COVER	LCP E6808	UL 94V-0 Black	1PCS

广东星坤科技股份有限公司  
 文件工程章

REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES

DSND	SCALE: N/A	MODEL TYPE: Type-C 3.1
DWN	VIEW:	PART NO.:
CHKD	UNIT: mm/in	DWG NO.: U263-24XN-4BQC16
APPD	SIZE: A4	WEIGHT SHEET REVISION
XKB INDUSTRIAL PRECISION CO., LIMITED		1/1 A0