
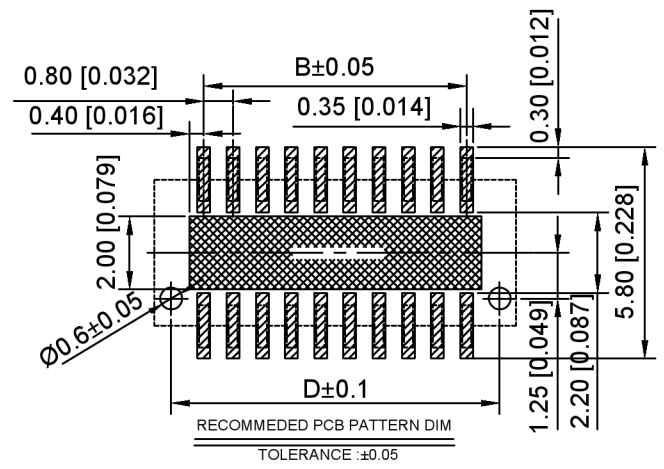


| MATING HEIGHT | PLUG | SOCKET |
|---------------|------|--------|
| 4.0 | 1.0 | 3.0 |
| 4.5 | 1.0 | 3.5 |
| 5.0 | 1.0 | 4.0 |
| 5.5 | 1.0 | 4.5 |
| 6.0 | 2.0 | 4.0 |
| 6.5 | 2.0 | 4.5 |

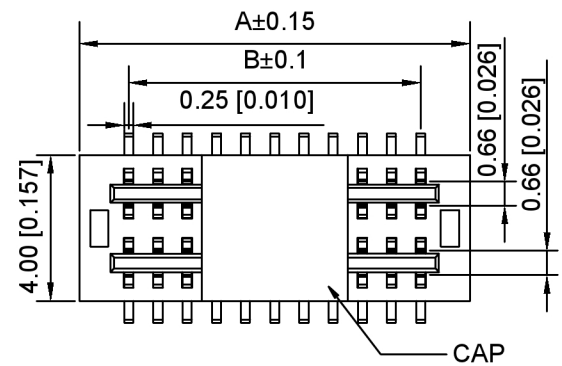

| No. of contacts | Dimensions | | | | | No. of contacts | Dimensions | | | | |
|-----------------|------------|-------|-------|-------|------|-----------------|------------|-------|-------|-------|---|
| | A | B | C | D | E | | A | B | C | D | E |
| 4 | 3.50 | 0.80 | 1.80 | 2.60 | 4.00 | 54 | 23.50 | 20.80 | 21.80 | 22.60 | |
| 6 | 4.30 | 1.60 | 2.60 | 3.40 | | 56 | 24.30 | 21.60 | 22.60 | 23.40 | |
| 8 | 5.10 | 2.40 | 3.40 | 4.20 | | 58 | 25.10 | 22.40 | 23.40 | 24.20 | |
| 10 | 5.90 | 3.20 | 4.20 | 5.00 | | 60 | 25.90 | 23.20 | 24.20 | 25.00 | |
| 12 | 6.70 | 4.00 | 5.00 | 5.80 | | 62 | 26.70 | 24.00 | 25.00 | 25.80 | |
| 14 | 7.50 | 4.80 | 5.80 | 6.60 | | 64 | 27.50 | 24.80 | 25.80 | 26.60 | |
| 16 | 8.30 | 5.60 | 6.60 | 7.40 | | 66 | 28.30 | 25.60 | 26.60 | 27.40 | |
| 18 | 9.10 | 6.40 | 7.40 | 8.20 | | 68 | 29.10 | 26.40 | 27.40 | 28.20 | |
| 20 | 9.90 | 7.20 | 8.20 | 9.00 | | 70 | 29.90 | 27.20 | 28.20 | 29.00 | |
| 22 | 10.70 | 8.00 | 9.00 | 9.80 | | 72 | 30.70 | 28.00 | 29.00 | 29.80 | |
| 24 | 11.50 | 8.80 | 9.80 | 10.60 | | 74 | 31.50 | 28.80 | 29.80 | 30.60 | |
| 26 | 12.30 | 9.60 | 10.60 | 11.40 | | 76 | 32.30 | 29.60 | 30.60 | 31.40 | |
| 28 | 13.10 | 10.40 | 11.40 | 12.20 | 78 | 33.10 | 30.40 | 31.40 | 32.20 | | |
| 30 | 13.90 | 11.20 | 12.20 | 13.00 | 80 | 33.90 | 31.20 | 32.20 | 33.00 | | |
| 32 | 14.70 | 12.00 | 13.00 | 13.80 | 82 | 34.70 | 32.00 | 33.00 | 33.80 | | |
| 34 | 15.50 | 12.80 | 13.80 | 14.60 | 84 | 35.50 | 32.80 | 33.80 | 34.60 | | |
| 36 | 16.30 | 13.60 | 14.60 | 15.40 | 86 | 36.30 | 33.60 | 34.60 | 35.40 | | |
| 38 | 17.10 | 14.40 | 15.40 | 16.20 | 88 | 37.10 | 34.40 | 35.40 | 36.20 | | |
| 40 | 17.90 | 15.20 | 16.20 | 17.00 | 90 | 37.90 | 35.20 | 36.20 | 37.00 | | |
| 42 | 18.70 | 16.00 | 17.00 | 17.80 | 92 | 38.70 | 36.00 | 37.00 | 37.80 | | |
| 44 | 19.50 | 16.80 | 17.80 | 18.60 | 94 | 39.50 | 36.80 | 37.80 | 38.60 | | |
| 46 | 20.30 | 17.60 | 18.60 | 19.40 | 96 | 40.30 | 37.60 | 38.60 | 39.40 | | |
| 48 | 21.10 | 18.40 | 19.40 | 20.20 | 98 | 41.10 | 38.40 | 39.40 | 40.20 | | |
| 50 | 21.90 | 19.20 | 20.20 | 21.00 | 100 | 41.90 | 39.20 | 40.20 | 41.00 | | |

| | | | | |
|---------------------------------------|-------------|------------------------------------------|-------|----------|
| DSND | SCALE: N/A | MODEL TYPE: 0.8mm BTB Style connector | | |
| DWN | VIEW: | PART NO.: X0812WVS-XXS-9TV01 | | |
| CHKD | UNIT: mm/in | DWG NO.: X-X0812WVS-XXS-9TV01 | | |
| APPD | SIZE: A4 | WEIGHT | SHEET | REVISION |
| XKB INDUSTRIAL PRECISION CO., LIMITED | | | 1/1 | A0 |

广东星坤科技股份有限公司
文件工程章

| REVISIONS | DATE | REVISED | APPROVED | UNSPECIFIED TOLERANCES |
|-------------|------|---------|----------|------------------------|
| ANGLAR | | | | |
| L ≤ 4 | | | | ±5° |
| 4 < L ≤ 16 | | | | ±0.2 |
| 16 < L ≤ 63 | | | | ±0.3 |
| L > 63 | | | | ±0.4 |
| | | | | ±0.5 |

