

Specifications:

规格:

Voltage rating: 125V AC/DC

额定电压: 125V AC/DC

Current rating: 1A AC/DC

额定电流: 1A AC/DC

Withstanding voltage: 500V AC/minute

耐受电压: 500V AC/分钟

Temperature range: -25°C-+85°C

温度范围: -25°C-+85°C

Insulation resistance: 100MΩ Min


绝缘电阻: 100MΩ Min

Contact resistance: 20mΩ


接触电阻: 20mΩ Max

X1002 T - P SN - C
 ① ② ③ ④ ⑤


1. Series No
2. Category: T-Terminal
3. Material: P-Phosphor Bronze
4. Plating: SN-Tin plated
5. Type: C

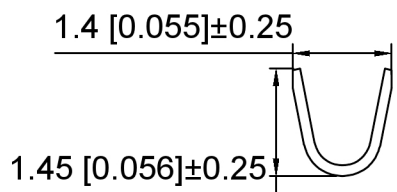

SEC:A-A

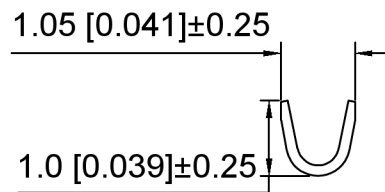

SEC:B-B



X1002T-PSN-C	Phosphor Bronze	AWG#28-32	X1002T-C
PART NO	Material	Wire Range	Suitable XKB Housing

广东星坤科技股份有限公司

4X	日期
3X	日期
2X	日期
1X	日期

文件工程章

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES



XKB INDUSTRIAL PRECISION CO., LIMITED

DSND	SCALE: N/A	MODEL TYPE: 1.0mm Crimp Style Connector
DWN	VIEW:	PART NO.: X1002T-PSN-C
CHKD	UNIT: mm/in	DWG NO.: X-X1002T-PSN-C
APPD	SIZE: A4	
	WEIGHT	SHEET
		1/1
	REVISION	A0