


Specifications:

规格:
 Voltage rating: 50V AC/DC
 额定电压: 50V AC/DC
 Current rating: 1A AC/DC
 额定电流: 1A AC/DC
 Withstanding voltage: 250V AC/minute
 耐受电压: 250V AC/分钟
 Temperature range: -25°C-+85°C
 温度范围: -25°C-+85°C
 Insulation resistance: ≥100MΩ
 绝缘电阻: ≥100MΩ
 Contact resistance: ≤20mΩ
 接触电阻: ≤20mΩ

X1004 T - P XX
 ① ② ③ ④

1. Series No
2. Category: T-Terminal
3. Material: P-Phosphor Bronze
4. Plating: SN-Bright Tin Plating
 100u"Min, Nickel 50u"Min
 V01-Contact Area Gold Flash.
 Other Area: Gold Flash, Ni: 50u"Min

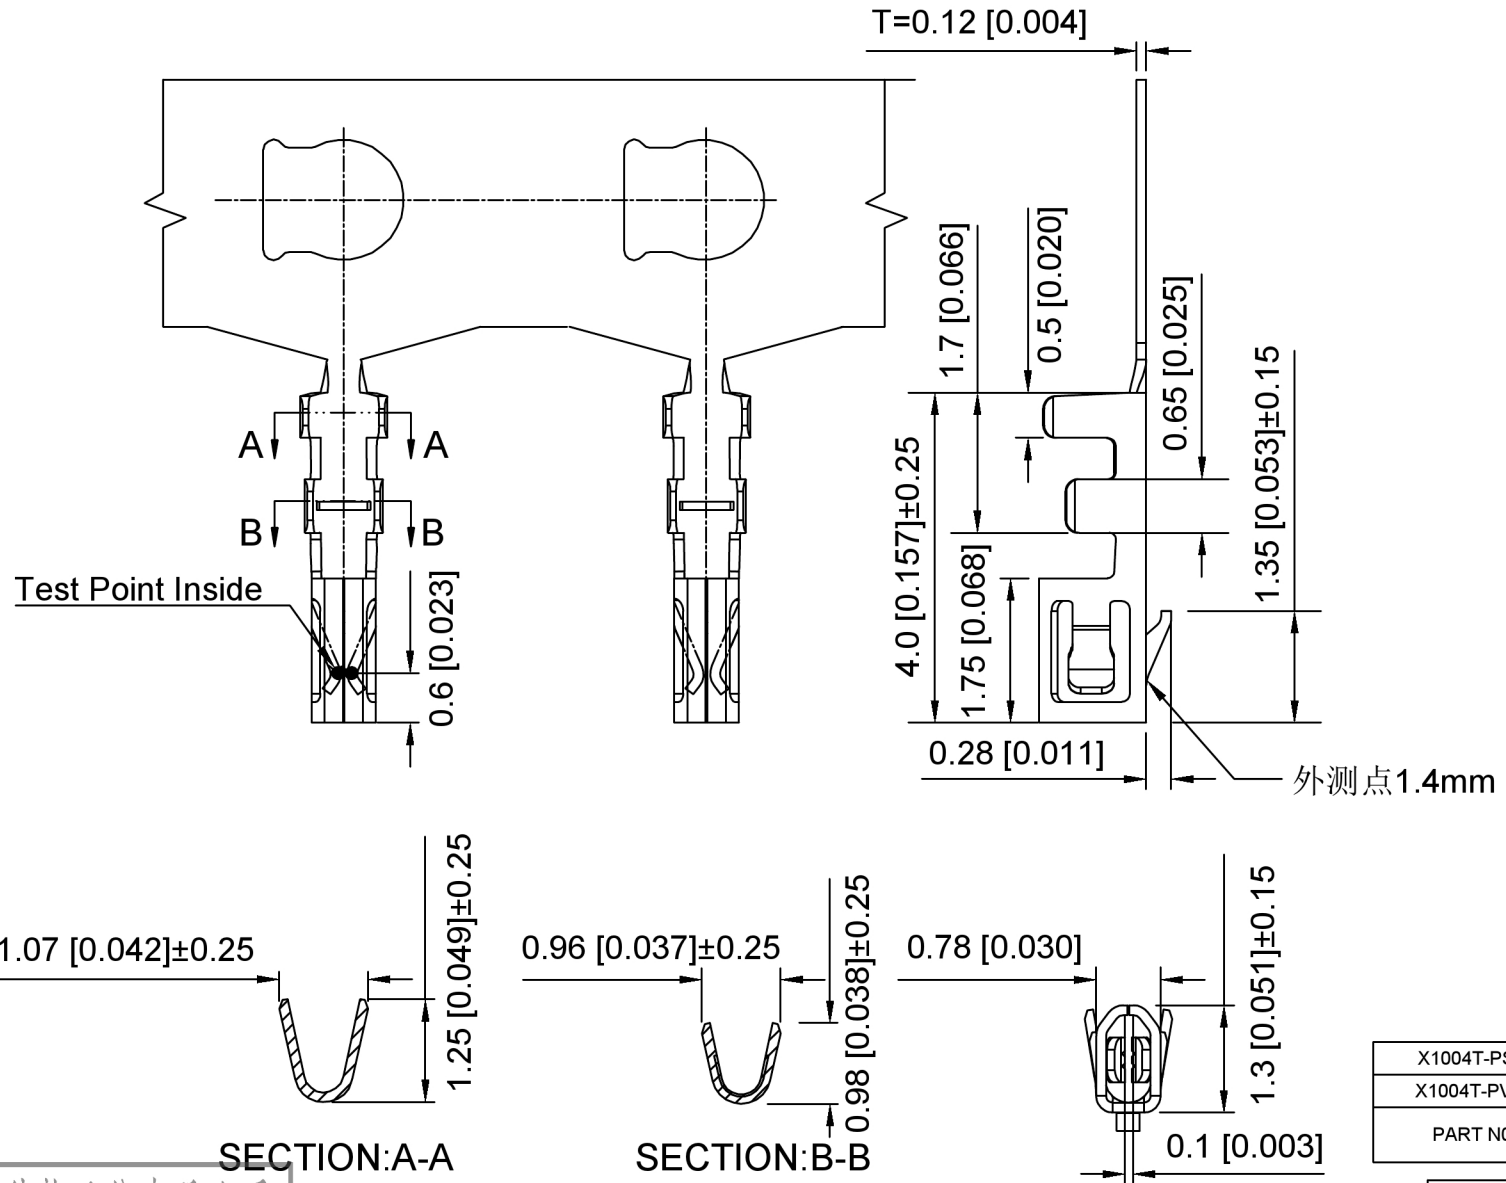

X1004T-PSN	Phosphor Bronze	AWG#28-32 O.D:0.8mm	X1004W	X1004H
X1004T-PV01				
PART NO	Material	Wire Range	Suitable XKB Wafer	Suitable XKB Housing

广东星坤科技股份有限公司

ΔX	日期
ΔX	日期
ΔX	日期
MARK	DESCRIPTION

REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES



DSND	SCALE: N/A	MODEL TYPE: 1.0mm Crimp Style Connector
DWN	VIEW:	PART NO.: X1004T-PSN
CHKD	UNIT: mm/in	DWG NO.: X-X1004T-PSN
APPD	SIZE: A4	WEIGHT
		SHEET
		REVISION

文件工程章