

1 2 3 4 5 6 7 8






■ Specifications :

- Voltage rating: 100V AC / DC
- Current rating: 1A AC / DC
- Withstanding voltage: 500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥500MΩ
- Contact resistance: ≤30mΩ
- After environmental testing: ≤40mΩ

X1008 H X-XX X-XXXX

① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② Category: H-HSG
- ③ Welding Board Angle: Blank-ordinary
- ④ Row No.-Pin No.: XX-Single row
- ⑤ Plug the Pin & special No.
- ⑥ Material: 46-PA46 94V-0 ; LP-LCP 94V-0
- ⑦ Color: Blank-natural color

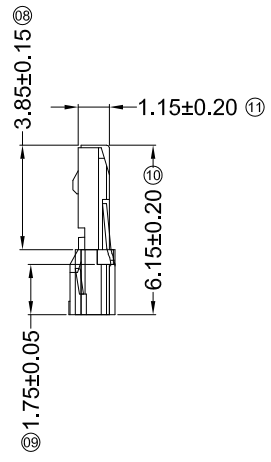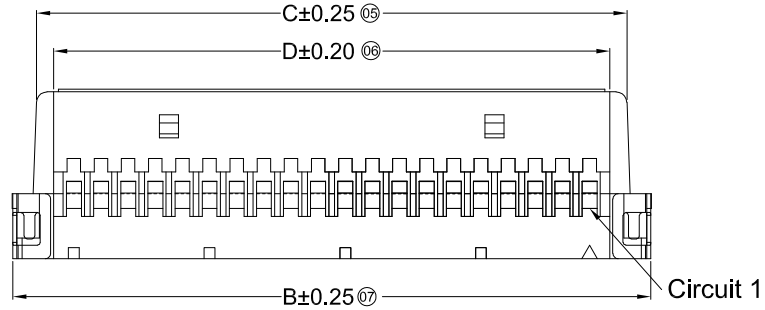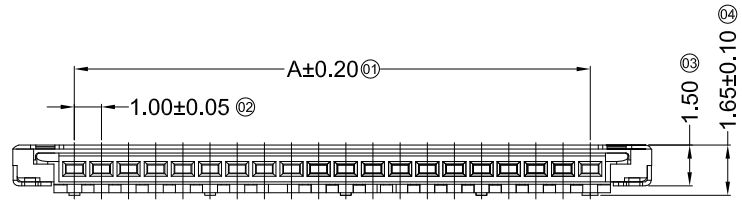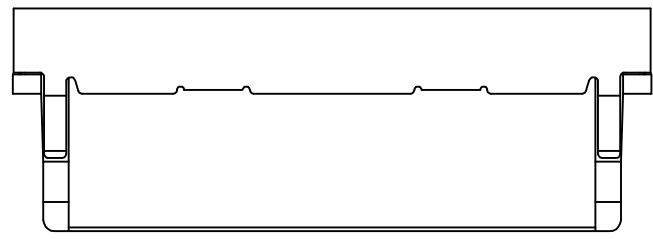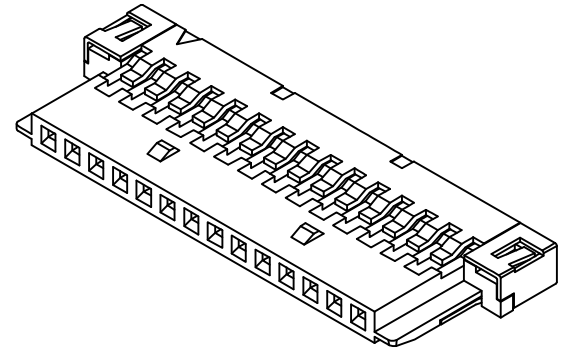

Poles	Dimensions(mm)			
	A	B	C	D
08	7.00	11.50	9.85	8.50
20	19.00	23.50	21.85	20.50
30	29.00	33.50	31.85	30.50

X1008H-XX-LP	LCP UL 94V-0	Stainless Steel	X1008T	X1008W
X1008H-XX-46	Nylon 46 UL 94V-0			
PART NO	Material	Material(Shell)	Suitable XKB Terminal	Suitable XKB Terminal

For and on behalf of
XKB INDUSTRIAL PRECISION CO., LIMITED
 香港星坤工業精密有限公司

△ X					ANGULAR	±5°
△ X					L ≤ 4	±0.2
△ X					4 < L ≤ 16	±0.3
MARK	DESCRIPTION	DATE	REVISED	APPROVED	16 < L ≤ 63	±0.4
					L > 63	±0.5
	REVISIONS				UNSPECIFIED TOLERANCES	

DSND	DATE	SCALE: N/A	MODEL TYPE:	
DWN	DATE	VIEW:	PART NO.:	
CHKD	DATE	UNIT: mm	1.00 mm Crimp Style Connectors	
APPD	DATE	SIZE: A4	DWG NO.:	
XKB INDUSTRIAL PRECISION CO., LIMITED			WEIGHT	SHEET
			1.0g	1/1
				REVISION
				A0

1 2 3 4 5 6 7 8