
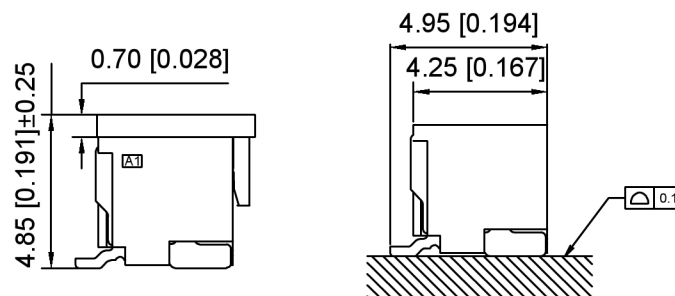


3D VIEWS



Specifications:

规格:
 Voltage rating:50V AC/DC
 额定电压:50V AC/DC
 Current rating:1A AC/DC
 额定电流:1A AC/DC
 Withstanding voltage:500V AC/minute
 耐受电压:500V AC/分钟
 Temperature range:-40°C~+110°C
 温度范围:-40°C~+110°C
 Insulation resistance:100MΩ min
 绝缘电阻:100MΩ Min
 Contact resistance:20mΩ Max
 接触电阻:20mΩ Max

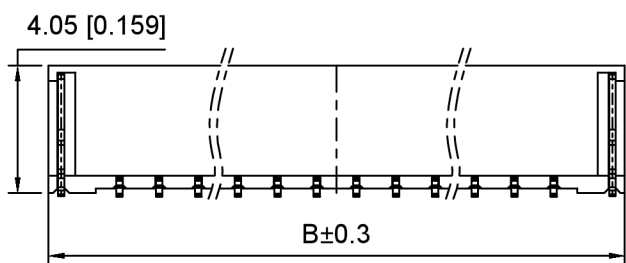

X1251 W V S-XX HF-LP SW
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- 1.Series No
- 2.Category:W-Wafer
- 3.Welding Board Angle:V-Straight 180°
- 4.Welding Way:S-SMT
- 5.Row No.Pin No:XX-02~15P
- 6.Special : HF-Halogen Free
- 7.Material:LP-LCP UL94V-0 Natural
- 8.Plating:SW-Matte Tin Plated

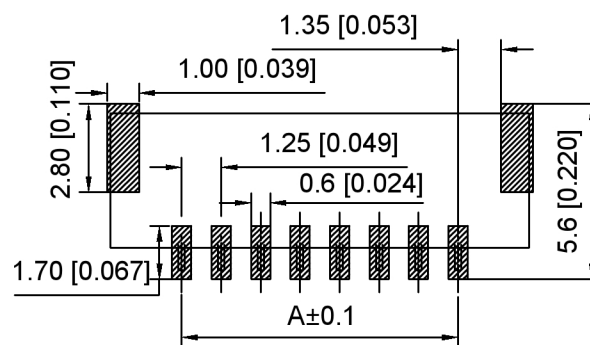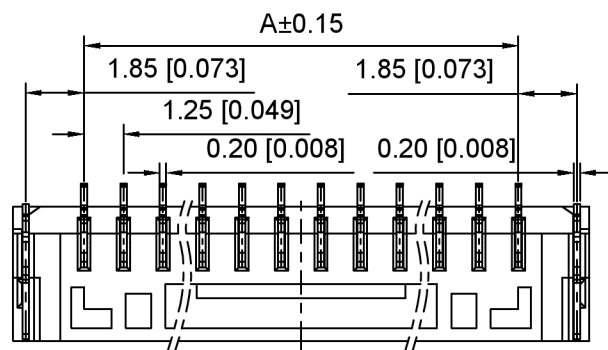

PCB Layout

Poles	Dimension(mm)				Poles	Dimension(mm)			
	A	B	C	D		A	B	C	D
02	1.25	5.75	3.75	0.75	09	10.00	14.50	12.50	4.65
03	2.50	7.00	5.00	1.60	10	11.25	15.75	13.75	6.60
04	3.75	8.25	6.25	2.65	11	12.25	17.00	15.00	6.60
05	5.00	9.50	7.50	2.50	12	13.75	18.25	16.25	6.60
06	6.25	10.75	8.75	4.65	13	15.00	19.50	17.50	6.60
07	7.50	12.00	10.00	4.65	14	16.25	20.75	18.75	6.60
08	8.75	13.25	11.25	4.65	15	17.50	22.00	20.00	6.60

X1251WS-XXHF-LPSW	LCP	Phosphor Bronze	X1251H
PART NO	Material	Material(Pin)	Suitable XKB Housing

DSND	SCALE: N/A	MODEL TYPE: 1.25mm Crimp Style Connector
DWN	VIEW:	PART NO.: X1251WS-XXHF-LPSW
CHKD	UNIT: mm/in	DWG NO.: X-X1251WS-XXHF-LPSW
APPD	SIZE: A4	



XKB INDUSTRIAL PRECISION CO.,LIMITED

WEIGHT	SHEET	REVISION
	1/1	A0

广东星坤科技股份有限公司

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
△X				
⊗X				

文件工程章

REVISIONS	UNSPECIFIED TOLERANCES
ANGLAR ±5°	
L ≤ 4 ±0.2	
4 < L ≤ 16 ±0.3	
16 < L ≤ 63 ±0.4	
L > 63 ±0.5	

www.helloxkb.com www.helloxkb.cn www.xk-dg.cn