

**Specifications:**

规格:

**Voltage rating:**250V AC/DC

额定电压: 250V AC/DC

**Current rating:**1A AC/DC

额定电流: 1A AC/DC

**Withstanding voltage:**500V AC/minute

耐受电压: 500V AC/分钟

**Temperature range:**-40℃~+105℃




温度范围: -40℃~+105℃

**Insulation resistance:**≥1000MΩ

绝缘电阻: ≥1000MΩ

**Contact resistance:**≤20mΩ

接触电阻: ≤20mΩ

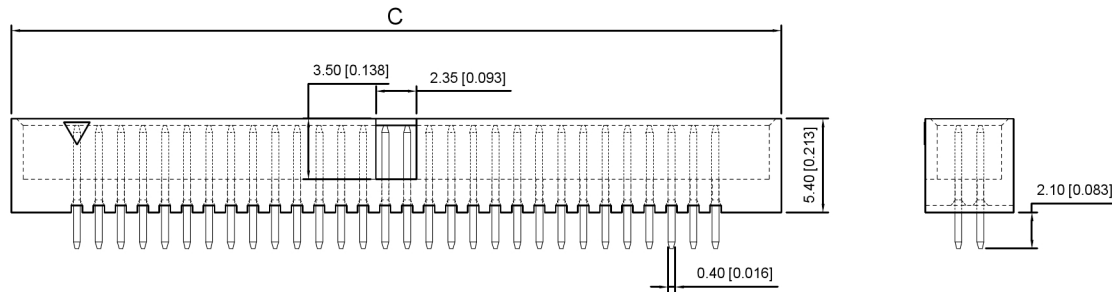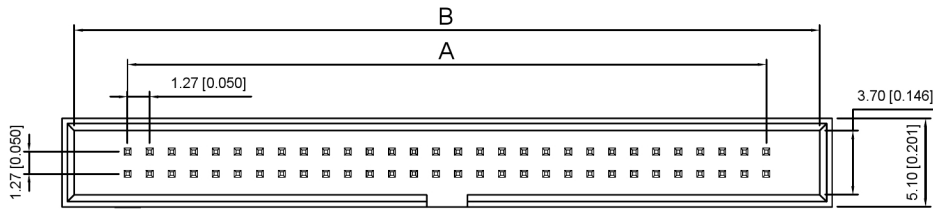

X1270 W V -2xXX A -6T V01  
① ② ③ ④ ⑤ ⑥ ⑦

- 1.Series No
- 2.Category:W-WAFER
- 3.Welding Board Angle:V-Stright Angle 180°
- 4.Row No-Pin No:2xXX-2x05P~2x30P
- 5.A:No gap
- 6.Material:6T:Nylon-6T UL94V-0
- 7.Plating Category: V01-All Gold Flash

NUMBER OF POSITIONS	DIMENSION		
	A	B	C
10	5.08	11.25	12.65
14	7.62	13.79	15.19
16	8.89	15.06	16.46
20	11.43	17.60	19.00
26	15.24	21.41	22.81
30	17.78	23.95	25.35
34	20.32	26.49	27.89
40	24.13	30.30	31.70
50	30.48	36.65	38.05
60	36.83	43.00	44.40

**Recommended PCB Layout**

X1270WV-2xXXA-6TV01	Nylon-6T UL 94V-0	Copper Alloy	Gold Flash	X1270H
PART NO	Material	Material(Pin And Solder Tabs)	Finish(Pin And Solder Tabs)	Suitable XKB Terminal

广东星坤科技股份有限公司  
文件工程章

REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES



XKB INDUSTRIAL PRECISION CO., LIMITED

DSND	SCALE: N/A	MODEL TYPE: 1.27mm BTB Style Connectors
DWN	VIEW:	PART NO.:
CHKD	UNIT: mm/in	DWG NO.:
APPD	SIZE: A4	X1270WV-2xXXA-6TV01
		WEIGHT
		SHEET
		REVISION
		1/1
		A0