



Specifications:


规格:
 Voltage rating:30V AC/DC
 额定电压: 30V AC/DC
 Current rating:2A AC/DC
 额定电流: 2A AC/DC
 Withstanding voltage:500V AC/minute
 耐受电压: 500V AC/分钟
 Temperature range:-40°C-+125°C
 温度范围: -40°C-+125°C
 Insulation resistance:100MΩ
 绝缘电阻: 100MΩ
 Contact resistance:20mΩ Max
 接触电阻: 20mΩ Max

X1300 T - P V01
 ① ② ③ ④


1. Series No
2. Category:T-Terminal
3. Material:P-Phosphor Bronze
4. Plating:V01-Gold Flash

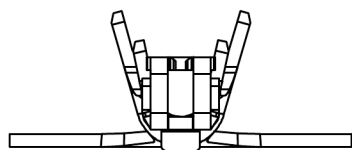

SECTION:A-A
SCALE:1:1



SECTION:B-B
SCALE:1:1

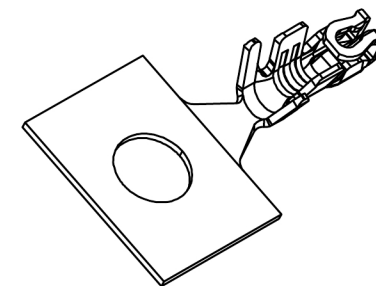

X1300T-PV01	Phosphor Bronze	AWG#30~26 O.D 0.98mm Max	X9635TF
PART NO	Material	Wire Range	Suitable XKB Terminal

DSND		SCALE: N/A	MODEL TYPE: 1.3mm Crimp Style Connector
DWN		VIEW:	PART NO.: X1300T-PV01
CHKD		UNIT: mm/in	DWG NO.: X-X1300T-PV01
APPD		SIZE: A4	



XKB INDUSTRIAL PRECISION CO., LIMITED

WEIGHT	SHEET	REVISION
	1/1	A0

					ANGLAR	±5°
ΔX					L ≤ 4	±0.2
ΔX					4 < L ≤ 16	±0.3
ΔX					16 < L ≤ 63	±0.4
MARK					L > 63	±0.5
REVISIONS					UNSPECIFIED TOLERANCES	
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn						