
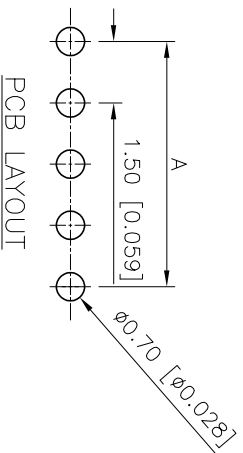
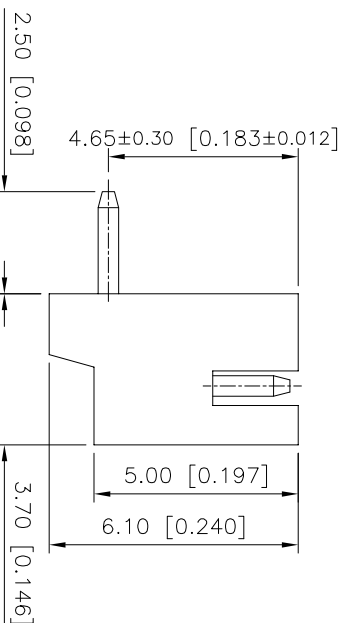
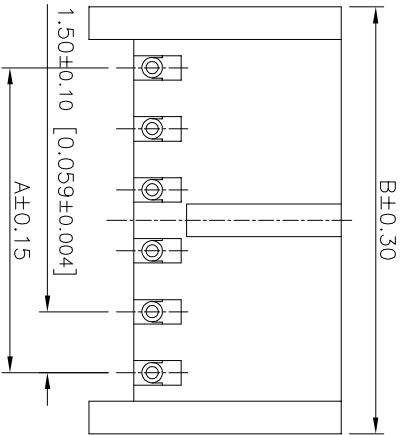
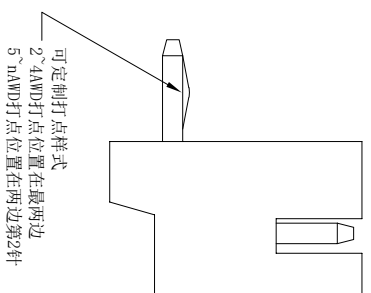


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	2024.02.29	

### Specifications (规格):

1. Voltage rating (额定电压): 50V AC DC
2. Current rating (额定电流): 2.4A AC/DC
3. Withstanding voltage (耐压值):  $\geq 500V$  AC/minute
4. Insulation resistance (绝缘电阻):  $500M\Omega$  Min
5. Contact resistance (绝缘电阻):  $20m\Omega$  Max
6. Temperature range (使用温度):  $-25^{\circ}C \sim +85^{\circ}C$

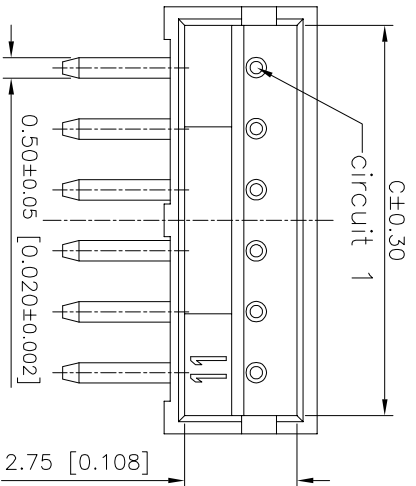

NUMBER OF POSITIONS	DIM.A	DIM.B	DIM.C	NUMBER OF POSITIONS	DIM.A	DIM.B	DIM.C
02	1.50	4.50	3.70	09	12.00	15.00	14.20
03	3.00	6.00	5.20	10	13.50	16.50	15.70
04	4.50	7.50	6.70	11	15.00	18.00	17.20
05	6.00	9.00	8.20	12	16.50	19.50	18.70
06	7.50	10.50	9.70	13	18.00	21.00	20.20
07	9.00	12.00	11.20	14	19.50	22.50	21.70
08	10.50	13.50	12.70	15	21.00	24.00	23.20

ANGLELAR	±5°
X.	±0.40
X.X	±0.30
X.XX	±0.20
X.XXX	±0.15

UNSPECIFIED TOLERANCES

X1502WR-XXK-NOSN	PA66 UL 94V-0	BRASS	TIN-PLATED	X1502H		
PART NO.	MATERIAL	MATERIAL(PIN)	FINISH(PIN)	Suitable XKB Terminal		
DESIGN	桑葚	VIEW:		MODEL TYPE:		
CHECKED		UNIT: mm/in		1.50mm Crimp Style Connector		
APPROVED		SIZE: A4		PART NO.: X1502WR-XXK-NOSN		
				DWG NO.:		
XKB INDUSTRIAL PRECISION CO., LIMITED				SCALE	PAGE	REVISION
				N/A	1/1	A0

PART NO.:

X1502 W R-XX K-NO SN

- ① Series No
- ② Category: W-Wafer
- ③ Welding Board Angle: R-Straight 90°
- ④ Row No-Pin: XX-02P~15P
- ⑤ Plug The Pin&Special NO.: K-Kink
- ⑥ Material: NO-PA66 UL94V-0
- ⑦ Plating: SN-Bright Tin Plated