
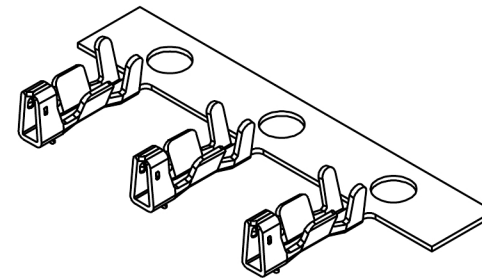


Specifications:


规格:

Voltage rating: 350V AC/DC
 额定电压: 350V AC/DC
 Current rating: 3A AC/DC
 额定电流: 3A AC/DC
 Withstanding voltage: 500V AC/minute
 耐受电压: 500V AC/分钟
 Temperature range: -40°C +105°C
 温度范围: -40°C +105°C
 Insulation resistance: ≥500MΩ
 绝缘电阻: ≥500MΩ
 Contact resistance: ≤10mΩ
 接触电阻: ≤10mΩ

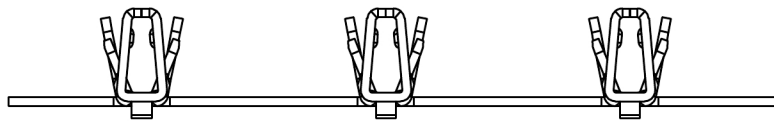


X1511 T - P SN - A
 ① ② ③ ④ ⑤


1. Series No
2. Category: T-Terminal
3. Material: P-Phosphor Bronze
4. Plating: SN- Tin Plated ;V01-Gold Flash
5. Special No: Type A



A-A



B-B



C-C

X1511T-PSN-A	Phosphor Bronze	AWG#28 O.D1.0mm	Tin	X1511H-A
X1511T-PV01-A			Gold Flash	
PART NO	Material	Wire Range	Plating	Suitable XKB Terminal

广东星坤科技股份有限公司

姓名	日期
数量	
Δ*	

文件工程章

DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
REVISIONS				
ANGLAR				±5°
L ≤ 4				±0.2
4 < L ≤ 16				±0.3
16 < L ≤ 63				±0.4
L > 63				±0.5



XKB INDUSTRIAL PRECISION CO., LIMITED

DSND	SCALE: N/A	MODEL TYPE: 1.5mm Crimp Style Connector
DWN	VIEW:	PART NO.: X1511T-PSN-A
CHKD	UNIT: mm/in	DWG NO.: X-X1511T-PSN-A
APPD	SIZE: A4	WEIGHT SHEET REVISION
		1/1 A0